

Motor circuit-breakers TeSys GV2, GV3 and GV7

Catalogue
September

06



Simply Smart !

telemecanique.com



This international site allows you to access all the Telemecanique products in just 2 clicks via comprehensive range data-sheets, with direct links to:

- Complete library: technical documents, catalogs, certificates, FAQs, brochures...
- Selection guides from the e-catalog.
- Product discovery sites and their Flash animations.

You will also find illustrated overviews, news to which you can subscribe, a discussion forum, the list of country contacts...

To live automation solutions every day!



Flexibility

- Interchangeable modular functions, to better meet the requirements for extensions
- Software and accessories common to multiple product families



Ingenuity

- Auto-adapts to its environment, "plug & play"
- Application functions, control, communication and diagnostics embedded in the products
- User-friendly operation either directly on the product or remotely



Simplicity

- Cost effective "optimum" offers that make selection easy for most typical applications
- Products that are easy to understand for users, electricians and automation specialists
- User-friendly intuitive programming



Compactness

- High functionality in a minimum of space
- Freedom in implementation



Openness

- Compliance with field bus, connection, and software standards
- Enabling decentralised or remote surveillance via the web with Transparent Ready products

Motor circuit-breakers TeSys GV2, GV3 and GV7

Thermal-magnetic circuit-breakers

Selection guide **pages 2 and 3**

- Presentation *pages 6 and 7*
- Characteristics *pages 8 to 13*
- Curves *pages 24 to 36*
- References *pages 46 to 51*
- Dimensions, mounting *pages 66 to 71*
- Schemes *pages 72 and 73*

Magnetic circuit-breakers

Selection guide **pages 4 and 5**

- Characteristics *pages 14 to 17*
- Curves *pages 37 to 45*
- References *pages 52 and 53*
- Dimensions, mounting *pages 74 to 76*
- Schemes *page 77*

Enclosed circuit-breakers

- References, dimensions, mounting *pages 78 to 85*

Substitution table

- Old / new references *page 86*

Applications

Protection of motors against short-circuits and overloads



Tripping threshold on short-circuit	13 I _n			
Standard motor power ratings in AC-3, 415 V	Up to 15 kW	Up to 30 kW	37 kW	
Operational current at 415 V	0.1...32 A	9...65 A	56...80 A	
Breaking capacity at 415 V (I _{cu}) to IEC 60947-2	10...100 kA	35...100 kA	50...100 kA	15 kA
Door interlock mechanism	Without	With	Without	Without
Circuit-breaker type	GV2 ME	GV2 P	GV3 P	GV3 ME80
Pages	46 and 47	48	48	48

Protection of motors with high current peak on starting



7.5...110 kW

12...220 A

35 and 36 kA

With

GV7 RE

49

70 kA

GV7 RS

20 In

Up to 11 kW

0.25...23 A

15...100 kA

With

GV2 RT

50 and 51

Applications

Protection of motors
 Magnetic circuit-breakers provide short-circuit protection. They must be combined with thermal overload relays to provide motor overload protection.



Tripping threshold on short-circuit

13 I_n

Standard motor power ratings in AC-3, 415 V

Up to 15 kW

Operational current at 415 V

0.4...32 A

Breaking capacity at 415 V (I_{cu}) to IEC 60947-2

10...100 kA

35...100 kA

Door interlock mechanism

With

Circuit-breaker type


GV2 LE

GV2 L

Pages

52

53

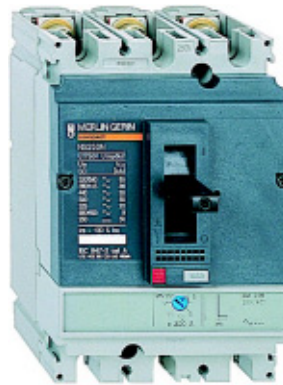


		6...14 In	8...13 In	6.3...12.5 In
Up to 30 kW	37 kW	0.37...250 kW		
25...65 A	80 A	1.5...500 A		
50...100 kA	35 kA	25.7 and 150 kA	35.7...150 kA	45.7...150 kA
Without	With	With		
GV3 L	GK3 EF80	NS 80	NS 100 to NS 250	NS 400 and NS 630
53	53	Please consult the Merlin Gerin catalogue - Low Voltage Distribution		


TeSys protection components

Thermal-magnetic motor circuit-breakers


GV2, GV3 and GV7




GV2 ME
with screw clamp
terminals




GV2 ME
with spring terminals
connections



GV3 P



GV2 P



GV7 R

Presentation

GV2 ME, GV2 P, GV3 ME, GV3 P and GV7 R motor circuit-breakers are 3-pole thermal-magnetic circuit-breakers **specifically designed for the control and protection of motors**, conforming to standards IEC 60947-2 and IEC 60947-4-1.

Connection

GV2

GV2 ME and GV2 P circuit-breakers are designed for connection by screw clamp terminals.

Circuit-breaker GV2 ME can be supplied with lugs or spring terminal connections. Spring terminal connections ensure secure, permanent and durable clamping that is resistant to harsh environments, vibration and impact and are even more effective when conductors without cable ends are used. Each connection can take two independent conductors.

GV3

GV3 circuit-breakers feature connection by BTR screws (hexagon socket head), tightened using a n° 4 Allen key.

This type of connection uses the **EverLink®** system with creep compensation (1) (Schneider Electric patent).

This technique makes it possible to achieve accurate and durable tightening torque, in order to avoid cable creep.

GV3 circuit-breakers are also available with connection by lugs. This type of connection meets the requirements of certain Asian markets and is suitable for applications subject to strong vibration, such as railway transport.

GV7

GV7 circuit-breakers: with connection by screw clamp terminals (for bars and lugs) and by clip-on connectors.

Operation

Control is manual and local when the motor circuit-breaker is used on its own. Control is automatic and remote when it is associated with a contactor.

GV2 ME and GV3 ME80

Pushbutton control.

Energisation is controlled manually by operating the Start button "I" 1.

De-energisation is controlled manually by operating the Stop button "O" 2, or automatically by the thermal-magnetic protection elements or by a voltage trip attachment.

GV2 P, GV3 P and GV7 R

- Control by rotary knob: for GV2 P and GV3 P
- Control by rocker lever: for GV7 R.

Energisation is controlled manually by moving the knob or rocker lever to position "I" 1. De-energisation is controlled manually by moving the knob or rocker lever to position "O" 2. De-energisation due to a fault automatically places the knob or rocker lever in the "Trip" position 3.

Re-energisation is possible only after having returned the knob or rocker lever to position "O".

(1) Creep: normal crushing phenomenon of copper conductors, that is accentuated over time.

TeSys protection components

Thermal-magnetic motor circuit-breakers GV2, GV3 and GV7

Presentation (continued)

Protection of motors and personnel

Motor protection is provided by the thermal-magnetic protection elements incorporated in the motor circuit-breaker.

The **magnetic** elements (short-circuit protection) have a non-adjustable tripping threshold, which is equal to 13 times the maximum setting current of the thermal trips.

The **thermal** elements (overload protection) include automatic compensation for ambient temperature variations.

The rated operational current of the motor is displayed by means of a graduated knob 4. Personnel protection is also provided. All live parts are protected against direct finger contact from the front panel.

The addition of an undervoltage trip allows the circuit-breaker to be de-energised in the event of an undervoltage condition. The user is therefore protected against sudden starting of the machine when normal voltage is restored, since the Start button "I" has to be pressed to restart the motor.

With the addition of a shunt trip, de-energisation of the unit can be remotely controlled.

The operators on both open-mounted and enclosed motor circuit-breakers can be locked in the Stop position "O" by up to 4 padlocks.

Because they are suitable for isolation, these circuit-breakers, in the open position, provide an adequate isolation distance and indicate the actual position of the moving contacts by the position of the operators.

Special features

These motor circuit-breakers are easily installed in any configuration thanks to their universal fixing arrangement: screw fixing or clip-on mounting on symmetrical, asymmetrical or combination rails.

Environment			GV2 ME	GV2 P	GV3 P	GV3 ME80	GV7 R
Circuit-breaker type			GV2 ME	GV2 P	GV3 P	GV3 ME80	GV7 R
Conforming to standards			IEC 60947-1, 60947-2, 60947-4-1, EN 60204, UL 508, CSA C 22.2 n° 14-05, NF C 63-650, 63-120, 79-130, VDE 0113, 0660		IEC/EN 60947-1, 60947-2, 60947-4-1, UL 508 type E, CSA C 22.2 n° 14-05 type E	IEC/EN, NF EN, BS EN, DINEN60947-2, 60947-4-1	IEC 60947-1, 60947-2, 60947-4-1, EN 60947-1, 60947-2, EN 60947-4-1, NF C 63-650, NF C 63-120, 79-130, VDE 0113, 0660
Product certifications			UL, CSA, CCC, CEBC, GOST, TSE, BV, GL, LROS, DNV, PTB, EZU, SETI, RINA, ATEX (pending)	UL (1), CSA, PTB, EZU, GOST, TSE, DNV, LROS, GL, BV, RINA, CCC, ATEX (pending)	UL, CSA, CCC, GOST, ATEX (pending)	UL, CSA, LROS	UL, DNV, CCC
Protective treatment			"TH"		"TH"	"TC"	"TC"
Degree of protection	Conforming to IEC 60529	Open mounted	IP 20		IP 20	IP 20	IP 405 with terminal shrouds
		In enclosure	GV2 M●01: IP 41 GV2 M●02: IP 55	–	GV3 PC01, GV3 PC02: IP 65	GV3 CE01: IP 55	–
Shock resistance	Conforming to IEC 60068-2-27		30 gn -11 ms		On: 15 gn -11 ms Off: 30 gn -11 ms	22 gn - 20 ms	30 gn -11 ms
Vibration resistance	Conforming to IEC 60068-2-6		5 gn (5...150 Hz)		5 gn (5...300 Hz)	2.5 gn (0...25 Hz)	2.5 gn (25 Hz)
Ambient air temperature	Storage		°C	- 40...+ 80	- 40...+ 80	- 40...+ 80	- 55...+ 95
	Operation	Open mounted	°C	- 20...+ 60	- 20...+ 60	- 20...+ 60 (2)	- 25... + 70
		In enclosure	°C	- 20...+ 40	- 20...+ 40	- 20...+ 40	–
Temperature compensation		Open mounted	°C	- 20...+ 60	- 20...+ 60	- 20...+ 60	- 25... + 55 (3)
		In enclosure	°C	- 20...+ 40	- 20...+ 40	- 20...+ 40	–
Flame resistance	Conforming to IEC 60695-2-1		°C		960	960	960
Maximum operating altitude			m		2000	3000	2000
Suitable for isolation	Conforming to IEC 60947-1 § 7-1-6				Yes	Yes	–
Resistance to mechanical impact			J		0.5	0.5	0.5
					In enclosure: IK 06	IK 09	–
Sensitivity to phase failure					Yes, conforming to IEC 60947-4-1 § 7-2-1-5-2		

Technical characteristics			GV2 ME	GV2 P	GV2 RT	GV3 P	GV3 ME80	GV7 R●20... R●100	GV7 R●150	GV7 R●220
Circuit-breaker type			GV2 ME	GV2 P	GV2 RT	GV3 P	GV3 ME80	GV7 R●20... R●100	GV7 R●150	GV7 R●220
Utilisation category	Conforming to IEC 60947-2		A			A	A	A		
	Conforming to IEC 60947-4-1		AC-3			AC-3	AC-3	AC-3		
Rated operational voltage (Ue)	Conforming to IEC 60947-2		V		690	690	690	690		
Rated insulation voltage (Ui)	Conforming to IEC 60947-2		V		690	690	690	750		
	Conforming to CSA C22-2 n° 14, UL 508		V		600	600	600 (B600)	600		
Rated operational frequency	Conforming to IEC 60947-2		Hz		50/60	50/60	50/60	50/60		
Rated impulse withstand voltage (U imp)	Conforming to IEC 60947-2		kV		6	6	6	8		
Total power dissipated per pole			W		2.5	8	8	5	8.7	14.5
Mechanical durability (C.O.: Close, Open)			C.O.		100 000	50 000	30 000	50 000	40 000	20 000
Electrical durability for AC-3 duty	440 V In/2		C.O.		100 000	–	30 000	50 000	40 000	20 000
	440 V In		C.O.		–	50 000	–	30 000	20 000	10 000
Duty class (maximum operating rate)			C.O./h		25	25	25	25		
Maximum conventional rated thermal current (Ith)	Conforming to IEC 60947-4-1		A		0.16... 32	0.16... 32	0.40... 23	13... 65	80	12... 100
Rated duty	Conforming to IEC 60947-4-1				Continuous duty					


(1) UL 508 type E for GV2 P●●H7

(2) Leave a space of 9 mm between 2 circuit-breakers: either an empty space, or side mounting add-on contact blocks. Horizontal mounting is possible up to 40 °C.

(3) For operation up to 70 °C, please consult your Regional Sales Office.

Mounting characteristics


Operating position
Without derating, in relation to normal vertical mounting plane



Connection characteristics

Connection to screw clamp terminals or spring terminals


Bare cables



Circuit-breaker type			GV2 ME		GV2 P		GV3 P		GV3 ME80	
Connection to screw clamp terminals (1) (Max. number of conductors x c.s.a.)		mm ²	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
	Solid cable	mm ²	2 x 1	2 x 6	2 x 1	2 x 6	2 x 1	1 x 25 and 1 x 35	1 x 2.5	1 x 35
	Flexible cable without cable end	mm ²	2 x 1.5	2 x 6	2 x 1.5	2 x 6	2 x 1	1 x 25 and 1 x 35	1 x 2.5	2 x 16
	Flexible cable with cable end	mm ²	2 x 1	2 x 4	2 x 1	2 x 4	2 x 1	1 x 25 and 1 x 35	1 x 2.5	2 x 16
Tightening torque		N.m	1.7	1.7	1.7	1.7	5	5: 25 mm ² 8: 35 mm ²	5	5
Connection to spring terminals										
Number of conductors x c.s.a.										
	Solid cable	mm ²	2 x 1 (2)	2 x 6	–	–	–	–	–	–
	Flexible cable without cable end	mm ²	2 x 1.5 (2)	2 x 4	–	–	–	–	–	–

Connection by bars or lugs

Bars or lugs

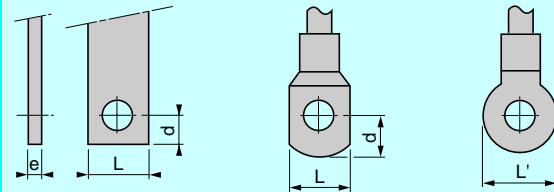

Circuit-breaker type			GV2 ME●●6	GV3 P●●6	GV7 R●20...R●100	GV7 R●150	GV7 R●220
Pitch	Without spreaders	mm	13.5	17.5	35	35	35
	With spreaders	mm	–	–	45	45	45
Bars or cables with lugs	e	mm	≤ 6	≤ 6	≤ 6	≤ 6	≤ 6
	L	mm	≤ 9.5	≤ 13.5	≤ 25	≤ 25	≤ 25
	L'	mm	≤ 9.5	≤ 16.5	–	–	–
	d	mm	≤ 10	≤ 10	≤ 10	≤ 10	≤ 10
Screws			M4	M6	M6	M8	M8
	Tightening torque	N.m	1.7	6	10	15	15
Bare cables (copper or aluminium) with connectors	Height (h)	mm	–	–	20	20	20
	C.s.a.	mm ²	–	–	1.5...95	1.5...95	1.5...185
	Tightening torque	N.m	–	–	15	15	15

(1) For motor circuit-breakers **GV3 P**: BTR hexagon socket head screws, **EverLink®** system. Require use of an insulated Allen key, in compliance with local electrical wiring regulations.
(2) For cross-sections 1 to 1.5 mm², the use of an **LA9 D99** cable end reducer is recommended.

TeSys protection components

Thermal-magnetic motor circuit-breakers

GV2 ME and GV2 P

Breaking capacity of GV2 ME and GV2 P

Circuit-breaker type			GV2 ME										GV2 P												
			01 to 06	07	08	10	14	16	20	21 & 22	23 & 25	32	01 to 06	07	08	10	14	16	20	21 & 22	32				
Rating			A	0.1 to 1.6	2.5	4	6.3	10	14	16	18	23 & 25	32	0.1 to 1.6	2.5	4	6.3	10	14	16	18	23 & 25	32		
Breaking capacity conforming to IEC 60947-2	230/240 V	Icu	kA	★	★	★	★	★	★	★	★	★	50	50	★	★	★	★	★	★	★	★	★		
		Ics % (1)		★	★	★	★	★	★	★	★	★	★	100	100	★	★	★	★	★	★	★	★	★	
	400/415 V	Icu	kA	★	★	★	★	★	★	15	15	15	10	★	★	★	★	★	★	★	★	★	★	★	
		Ics % (1)		★	★	★	★	★	★	50	50	40	50	★	★	★	★	★	★	★	★	★	★	★	
	440 V	Icu	kA	★	★	★	50	15	8	8	6	6	★	★	★	★	★	★	★	★	★	★	★	★	
		Ics % (1)		★	★	★	100	100	50	50	50	50	★	★	★	★	★	★	★	★	★	★	★	★	
	500 V	Icu	kA	★	★	★	50	10	6	6	4	4	★	★	★	★	★	★	★	★	★	★	★	★	
		Ics % (1)		★	★	★	100	100	75	75	75	75	★	★	★	★	★	★	★	★	★	★	★	★	
	690 V	Icu	kA	★	3	3	3	3	3	3	3	3	★	★	8	8	6	6	6	6	4	4	4	4	
		Ics % (1)		★	75	75	75	75	75	75	75	75	★	★	100	100	100	100	100	100	100	100	100	100	
	Associated fuses (if required) if Isc > breaking capacity Icu conforming to IEC 60947-2	230/240 V	aM	A	★	★	★	★	★	★	★	★	80	80	★	★	★	★	★	★	★	★	★	★	
			gG	A	★	★	★	★	★	★	★	★	★	100	100	★	★	★	★	★	★	★	★	★	★
		400/415 V	aM	A	★	★	★	★	★	★	63	63	80	80	★	★	★	★	★	★	★	★	★	★	★
			gG	A	★	★	★	★	★	★	80	80	100	100	★	★	★	★	★	★	★	★	★	★	★
		440 V	aM	A	★	★	★	50	50	50	50	63	63	★	★	★	★	★	★	★	★	★	★	★	★
			gG	A	★	★	★	63	63	63	63	80	80	★	★	★	★	★	★	★	★	★	★	★	★
		500 V	aM	A	★	★	★	50	50	50	50	50	50	★	★	★	★	★	★	★	★	★	★	★	★
			gG	A	★	★	★	63	63	63	63	63	63	★	★	★	★	★	★	★	★	★	★	★	★
690 V		aM	A	★	16	25	32	32	40	40	40	40	★	★	20	25	40	40	50	50	50	50	50	50	
		gG	A	★	20	32	40	40	50	50	50	50	★	★	25	32	50	50	63	63	63	63	63	63	

★ > 100 kA.
(1) As % of Icu.

Breaking capacity of GV2 ME and GV2 P (used in association with current limiter GV1 L3)

Circuit-breaker type			GV2 ME											
			A	01 to 06	07	08	10	14	16	20	21	22	32	
Rating			A	0.1 to 1.6	2.5	4	6.3	10	14	18	23	25	32	
Breaking capacity conforming to IEC 60947-2	230/240 V	Icu	kA	★	★	★	★	★	★	★	★	★	★	
		Ics % (1)		★	★	★	★	★	★	★	★	★	★	★
	400/415 V	Icu	kA	★	★	★	★	★	100	100	100	100	100	
		Ics % (1)		★	★	★	★	★	50	50	40	40	40	
	440 V	Icu	kA	★	★	★	★	★	50	20	20	20	20	
		Ics % (1)		★	★	★	★	★	75	75	75	75	75	
	500 V	Icu	kA	★	★	★	★	★	50	42	10	10	10	10
		Ics % (1)		★	★	★	★	★	100	100	75	75	75	75
	Circuit-breaker type			GV2 P										
				A	01 to 06	07	08	10	14	16	20	21	22	32
	Rating			A	0.1 to 1.6	2.5	4	6.3	10	14	18	23	25	32
	Breaking capacity conforming to IEC 60947-2	230/240 V	Icu	kA	★	★	★	★	★	★	★	★	★	★
Ics % (1)				★	★	★	★	★	★	★	★	★	★	★
400/415 V		Icu	kA	★	★	★	★	★	★	★	★	★	★	★
		Ics % (1)		★	★	★	★	★	★	★	★	★	★	★
440 V		Icu	kA	★	★	★	★	★	100	100	100	100	100	
		Ics % (1)		★	★	★	★	★	50	50	50	50	50	
500 V		Icu	kA	★	★	★	★	★	100	100	100	100	100	100
		Ics % (1)		★	★	★	★	★	50	50	50	50	50	50
690 V (3)		Icu = Ics	kA	★	50	50	50	50	50	50	50	50	50	50
Circuit-breaker type			GV2 ME											
			A	01 to 06	07	08	10	14	16	20	21	22	32	
Rating				A	0.1 to 1.6	2.5	4	6.3	10	14	18	23	25	32
Cable protection against thermal stress in the event of short-circuit (PVC insulated copper cables)	Minimum c.s.a. protected at 40 °C at Isc max.	1 mm ²		●	●	●	≤ 10 kA	≤ 6 kA	(2)	(2)	(2)	(2)	(2)	
		1.5 mm ²		●	●	●	≤ 20 kA	≤ 10 kA	(2)	(2)	(2)	(2)	(2)	
		2.5 mm ²		●	●	●	●	●	●	●	●	●	(2)	
		4...6 mm ²		●	●	●	●	●	●	●	●	●	●	

★ > 100 kA
 ● Cable c.s.a. protected
 (1) As % of Icu
 (2) Cable c.s.a. not protected
 (3) With limiter LA9 LB920

TeSys protection components

Thermal-magnetic motor circuit-breakers

GV3 P and GV3 ME80

Breaking capacity of GV3 P and GV3 ME80

Motor circuit-breaker type				GV3 P						GV3 ME80		
				13	18	25	32	40	50		65	
Rating			A	13	18	25	32	40	50	65	80	
Breaking capacity conforming to IEC 60947-2	230/240 V	Icu	kA	100	100	100	100	100	100	100	100	
		Ics % (1)		100	100	100	100	100	100	100	100	
	400/415 V	Icu	kA	100	100	100	100	50	50	50	15	
		Ics % (1)		50	50	50	50	50	50	50	50	
	440 V	Icu	kA	50	50	50	50	50	50	50	10	
		Ics % (1)		50	50	50	50	50	50	50	60	
	500 V	Icu	kA	12	12	12	12	10	10	10	4	
		Ics % (1)		50	50	50	50	50	50	50	100	
	690 V	Icu	kA	6	6	6	6	5	5	5	2	
		Ics % (1)		50	50	50	50	60	60	60	100	
	Associated fuses, if required if Ics > breaking capacity Icu	230/240 V	aM	A	★	★	★	★	★	★	★	★
			gG	A	★	★	★	★	★	★	★	★
415 V		aM	A	★	★	★	★	125	125	125	315	
		gG	A	★	★	★	★	160	160	160	400	
440 V		aM	A	63	80	125	125	125	125	125	315	
		gG	A	80	100	160	160	160	160	160	400	
500 V		aM	A	63	63	63	63	80	80	80	200	
		gG	A	80	80	80	80	100	100	100	250	
690 V		aM	A	50	50	50	50	63	63	63	200	
		gG	A	63	63	63	63	80	80	80	250	

★ Fuse not required: breaking capacity Icn > Isc.
(1) As % of Icu.

Breaking capacity of GV7 R

Circuit-breaker type			GV7	GV7						
				RE20...RE100	RS20...RS100	RE150	RS150	RE220	RS220	
Rating		A	12...20 to 60...100	90...150	90...150	132...220	132...220			
Breaking capacity conforming to IEC 60947-2	230/240 V	Icu	kA	85	100	85	100	85	100	
		Ics % (1)		100	100	100	100	100	100	
	400/415 V	Icu	kA	36	70	35	70	35	70	
		Ics % (1)		100	100	100	100	100	100	
	440 V	Icu	kA	36	65	35	65	35	65	
		Ics % (1)		100	100	100	100	100	100	
	500 V	Icu	kA	18	50	30	50	30	50	
		Ics % (1)		100	100	100	100	100	100	
	690 V	Icu	kA	8	10	8	10	8	10	
		Ics % (1)		100	100	100	100	100	100	
	Cable protection against thermal stress in the event of short-circuit (PVC insulated copper cables)	Minimum c.s.a. protected at 40 °C at Isc max.	4 mm ²		≤ 6 kA	≤ 6 kA	(2)	(2)	(2)	(2)
			6 mm ²		●	≤ 25 kA	(2)	(2)	(2)	(2)
10...50 mm ²				●	●	●	●	●	●	

(1) As % of Icu.
 ● Cable c.s.a. protected.
 (2) Cable c.s.a. not protected.

Environment		GV2 LE		GV2 L		
Circuit-breaker type		GV2 LE		GV2 L		
Conforming to standards		IEC 60947-1, 60947-2, EN 60204, NF C 63-650, NF C63-120, 79-130, VDE 0113, 0660, UL 1077.				
Product certifications		UL, CSA, CCC		UL, CSA, CCC, BV, DNV, GL, LROS, RINA		
Protective treatment		"TH"		"TH"		
Shock resistance	Conforming to IEC 60068-2-27	30 gn		30 gn		
Vibration resistance	Conforming to IEC 60068-2-6	5 gn (5 to 150 Hz)		5 gn (5 to 150 Hz)		
Ambient air temperature	Storage	°C	- 40...+ 80		- 40...+ 80	
	Operation	°C	- 20...+ 60		- 20...+ 60	
Flame resistance	Conforming to IEC 60695-2-1	°C	960		960	
Maximum operating altitude		m	2000		2000	
Operating position						
Connection (Max. number of conductors x c.s.a)	Solid cable	mm ²	Min. 2 x 1	Max. 2 x 6	Min. 2 x 1	Max. 2 x 6
	Flexible cable without cable end	mm ²	2 x 1.5	2 x 6	2 x 1.5	2 x 6
	Flexible cable with cable end	mm ²	2 x 1	2 x 4	2 x 1	2 x 4
Tightening torque		N.m	1.7		1.7	
Suitable for isolation	Conforming to IEC 60947-1 § 7-1-6		Yes		Yes	
Resistance to mechanical impact		J	0.5		0.5	
Technical characteristics						
Utilisation category	Conforming to IEC 60947-2		A		A	
	Conforming to IEC 60947-4-1		AC-3		AC-3	
Rated operational voltage (U_e)	Conforming to IEC 60947-2	V	690		690	
Rated insulation voltage (U_i)	Conforming to IEC 60947-2	V	690		690	
Rated operational frequency	Conforming to IEC 60947-2	Hz	50/60		50/60	
Rated impulse withstand voltage (U_{imp})	Conforming to IEC 60947-2	kV	6		6	
Total power dissipated per pole		W	1.8		1.8	
Mechanical durability (C.O.: Closing, Opening)	For AC-3 duty	C.O.	100 000		100 000	
Electrical durability for AC-3/415V duty (C.O.: Closing, Opening)		C.O.	100 000		100 000	
Duty class (maximum operating rate)		C.O./h	40		40	
Rated duty	Conforming to IEC 60947-4-1		Continuous duty		Continuous duty	

TeSys protection components

Magnetic motor circuit-breakers

GV2 LE and GV2 L

Circuit-breaker type			GV2 LE										GV2 L																
			03 to 06	07	08	10	14	16	20	22	32	03 to 06	07	08	10	14	16	20	22	32									
Rating			A	0.4 to 1.6	2.5	4	6.3	10	14	18	25	32	50	50	0.4 to 1	2.5	4	6.3	10	14	18	25	32						
Breaking capacity conforming to IEC 60947-2	230/240 V	l _{cu}	kA	★	★	★	★	★	★	★	★	★	50	50	★	★	★	★	★	★	★	★	50	50					
		l _{cs} % (1)		★	★	★	★	★	★	★	★	★	★	100	100	★	★	★	★	★	★	★	★	100	100				
	400/415 V	l _{cu}	kA	★	★	★	★	★	★	★	★	★	15	15	15	10	★	★	★	★	★	★	★	50	50	50	50		
		l _{cs} % (1)		★	★	★	★	★	★	★	★	★	50	50	40	50	★	★	★	★	★	★	★	50	50	50	50		
	440 V	l _{cu}	kA	★	★	★	50	15	8	8	6	6	★	★	★	★	★	★	★	★	★	★	★	20	20	20	20		
		l _{cs} % (1)		★	★	★	100	100	50	50	50	50	★	★	★	★	★	★	★	★	★	★	★	75	75	75	75		
	500 V	l _{cu}	kA	★	★	★	50	10	6	6	4	4	★	★	★	★	★	★	★	★	★	★	★	10	10	10	10		
		l _{cs} % (1)		★	★	★	100	100	75	75	75	75	★	★	★	★	★	★	★	★	★	★	★	100	75	75	75	75	
	690 V	l _{cu}	kA	★	3	3	3	3	3	3	3	3	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★		
		l _{cs} % (1)		★	75	75	75	75	75	75	75	75	★	100	100	100	100	100	100	100	100	100	100	100	100	100	100		
	Associated fuses (if required) if I _{sc} > breaking capacity I _{cu} conforming to IEC 60947-2 amendment 1	230/240 V	aM	A	★	★	★	★	★	★	★	★	★	80	80	★	★	★	★	★	★	★	★	★	★	★	100	100	
			gG	A	★	★	★	★	★	★	★	★	★	★	100	100	★	★	★	★	★	★	★	★	★	★	★	125	125
400/415 V		aM	A	★	★	★	★	★	★	★	★	★	63	63	80	80	★	★	★	★	★	★	★	★	★	80	100	100	100
		gG	A	★	★	★	★	★	★	★	★	★	80	80	100	100	★	★	★	★	★	★	★	★	★	100	125	125	125
440 V		aM	A	★	★	★	50	50	50	50	63	63	★	★	★	★	★	★	★	★	★	★	★	★	50	63	80	80	80
		gG	A	★	★	★	63	63	63	63	80	80	★	★	★	★	★	★	★	★	★	★	★	★	63	80	100	100	100
500 V		aM	A	★	★	★	50	50	50	50	50	50	★	★	★	★	★	★	★	★	★	★	★	★	50	50	50	50	50
		gG	A	★	★	★	63	63	63	63	63	63	★	★	★	★	★	★	★	★	★	★	★	★	63	63	63	63	63
690 V		aM	A	★	16	25	32	32	40	40	40	40	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
		gG	A	★	20	32	40	40	50	50	50	50	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
Cable protection against thermal stress in the event of short-circuit (PVC insulated copper cables) Minimum c.s.a. protected at 40 °C and at I _{sc} max.		1 mm ²	kA	●	●	●	≤10	≤6	(2)	(2)	(2)	(2)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	(2)	
		1.5 mm ²	kA	●	●	●	≤20	≤10	(2)	(2)	(2)	(2)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	(2)	
	2.5 mm ²		●	●	●	●	●	●	●	●	●	(2)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	(2)		
	4...6 mm ²		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		

★ > 100 kA
 ● Cable c.s.a. protected
 (1) As % of I_{cu}
 (2) Cable c.s.a. not protected

Environment		GV3 L		GK3 EF80		
Circuit-breaker type		GV3 L		GK3 EF80		
Conforming to standards		IEC/EN 60947-1, 60947-2		IEC 60947-2, EN 60204		
Protective treatment		"TH"		"TC"		
Degree of protection	Conforming to IEC 60529	IP 20		IP 20		
Shock resistance	Conforming to IEC 60068-2-27	On : 15 gn -11 ms Off : 30 gn -11 ms		22 gn -20 ms		
Vibration resistance	Conforming to IEC 60068-2-6	5 gn (5...300 Hz)		2.5 gn (0...25 Hz)		
Flame resistance	Conforming to IEC 60695-2-1	°C	960	960		
Ambient air temperature	Storage	°C	- 40...+ 80	- 40...+ 80		
	Operation	°C	- 20...+ 60 (1)	- 20...+ 70 open mounted		
Maximum operating altitude		m	3000	3000		
Operating position					Any position	
Connection (Max. number of conductors x c.s.a)	Solid cable	mm ²	Min. 2 x 1	Max. 1 x 25 1 x 35	Min. 1 x 2.5	Max. 1 x 35
	Flexible cable without cable end	mm ²	2 x 1	1 x 25 1 x 35	1 x 2.5 or 2 x 2.5	1 x 25 or 2 x 16
	Flexible cable with cable end	mm ²	2 x 1	1 x 25 1 x 35	1 x 2.5 or 2 x 2.5	1 x 25 or 2 x 16
Tightening torque		N.m	5	5 : 25 mm ² 8 : 35 mm ²	5	
Suitable for isolation conforming to IEC 60947-1 § 7-1-6			Yes		Yes	

Technical characteristics		GV3 L		GK3 EF80	
Rated insulation voltage (Ui)	Conforming to IEC 60947-2	V	690	750	
Rated impulse withstand voltage (U imp)	Conforming to IEC 60947-2	kV	6	10	
Rated operational voltage (Ue)	Conforming to IEC 60947-2	V	690	690	
Rated operational frequency		Hz	50/60	50...60	
Electrical durability for AC-3/415V duty (C.O.: Close - Open)		C.O.	50 000	1500	
Mechanical durability (C.O.: Closing, Opening)		C.O.	50 000	20 000	
Maximum operating rate		C.O./h	25	40	
Operating threshold of magnetic trips			14 I max	3363	
Utilisation category	Conforming to IEC 60947-2		A	A	

(1) Leave a space of 9 mm between 2 circuit-breakers: either an empty space or side-mounting add-on contact blocks. Horizontal mounting is possible up to 40 °C.

Breaking capacity of GV3 L and GK3 EF80

Type				GV3 L25	GV3 L32	GV3 L40	GV3 L50	GV3 L65	GK3 EF80	
Breaking capacity of the circuit-breaker only or of the circuit-breaker combined with a thermal overload relay	230/240 V	Icu	kA	100	100	100	100	100	50	
		Ics % (1)		100	100	100	100	100	40	
	400/415 V	Icu	kA	100	100	50	50	50	35	
		Ics % (1)		50	50	50	50	50	25	
	440 V	Icu	kA	50	50	50	50	50	25	
		Ics % (1)		50	50	50	50	50	30	
500 V	Icu	kA	12	12	10	10	10	15		
	Ics % (1)		50	50	50	50	50	30		
690 V	Icu	kA	6	6	5	5	5	6		
	Ics % (1)		50	50	60	60	60	50		
Associated fuses (if required) for use with circuit-breaker only or circuit-breaker combined with a thermal overload relay if I _{sc} > breaking capacity	230/240 V	aM	A	★	★	★	★	★	200	
		gG	A	★	★	★	★	★	315	
	415 V	aM	A	★	★	★	★	125	200	
		gG	A	★	★	★	★	160	250	
	440 V	aM	A	63	80	125	125	125	160	
		gG	A	80	100	160	160	160	250	
	500 V	aM	A	63	63	63	63	80	160	
		gG	A	80	80	80	80	100	200	
	690 V	aM	A	50	50	50	50	63	125	
		gG	A	63	63	63	63	80	160	
	Use of circuit-breakers without fuses				Minimum cable length (in metres) limiting the maximum short-circuit current to 35 kA maximum, so enabling breakers GK3 EF80 to be used without fuses					
	Cable c.s.a.			mm ²	≤ 25	35	50	70	95	120
I _{sc} (rms) 3-phase, incoming (U _e = 415 V)	50 kA	m	5	6	8	10	13	15		
	45 kA	m	5	5	7	8	10	12		
	40 kA	m	5	5	5	5	8	9		
	37 kA	m	5	5	5	5	5	5		

★ Fuse not required: breaking capacity I_{cn} > I_{sc}.

(1) As % of I_{cu}

TeSys protection components


Thermal-magnetic motor circuit-breakers

GV2, GV3 P and GV3 L

Auxiliary contacts

Type of contacts			Instantaneous auxiliary GV AN, GV AD							Fault signalling GV AD, GV AM11 (1)				Instantaneous auxiliary GV AE						
Rated insulation voltage (Ui) (associated insulation coordination)	Conforming to IEC 60947-1	V	690							690				250 (690 in relation to main circuit)						
	Conforming to CSA C22-2 n° 14 and UL 508	V	600							300				300						
Conventional thermal current (Ith)	Conforming to IEC 60947-5-1	A	6							2.5				2.5						
	Conforming to CSA C22-2 n° 14 and UL 508	A	5							1				1						
Mechanical durability (C.O.: Close - Open)		C.O.	100 000							1000				100 000						
Operational power and current conforming to IEC 60947-5-1. a.c. operation			AC-15/100 000 C.O.							AC-14/1000 C.O.				AC-15/100 000 C.O.						
	Rated operational voltage (Ue)	V	48	110	230	380	440	500	690	24	48	110	230	24	48	110	230			
	Operational power, normal conditions	VA	300	500	720	850	650	500	400	36	48	72	72	48	60	120	120			
	Occasional breaking and making capacities, abnormal conditions	kVA	3	7	13	15	13	12	9	0.22	0.3	0.45	0.45	0.48	0.6	1.27	2.4			
	Rated operational current (Ie)	A	6	4.5	3.3	2.2	1.5	1	0.6	1.5	1	0.5	0.3	2	1.25	1	0.5			
Operational power and current conforming to IEC 60947-5-1. d.c. operation			DC-13/100 000 C.O.							DC-13/1000 C.O.				DC-13/100 000 C.O.						
	Rated operational voltage (Ue)	V	24	48	60	110	240	–	–	24	48	60	–	24	48	60	–			
	Operational power, normal conditions	W	140	240	180	140	120	–	–	24	15	9	–	24	15	9	–			
	Occasional breaking and making capacities, abnormal conditions	W	240	360	240	210	180	–	–	100	50	50	–	100	50	50	–			
	Rated operational current (Ie)	A	6	5	3	1.3	0.5	–	–	1	0.3	0.15	–	1	0.3	0.15	–			
Low power switching reliability of contact			GV AE: Number of failures for "n" million operating cycles (17 V-5 mA): = 10 ⁻⁶																	
Minimum operational conditions d.c. operation		V	17																	
		mA	5																	
Short-circuit protection			By GB2 CB●● circuit-breaker (rating according to operational current for Ue ≤ 415 V) or by gG fuse 10 A max											GB2 CB06 or gG fuse 10 A max						
Cabling, screw clamp terminals	Number of conductors		1							2										
	Solid cable	mm ²	1...2.5							1...2.5										
	Flexible cable without cable end	mm ²	0.75...2.5							0.75...2.5										
	Flexible cable with cable end	mm ²	0.75...1.5							0.75...1.5										
	Tightening torque	N.m	1.4 max							1.4 max										
Cabling, spring terminal connections			GV AN only							–							0.75...1.5			
Flexible cable without cable end		mm ²	0.75...2.5							0.75...2.5							–			

Operation of instantaneous auxiliary contacts

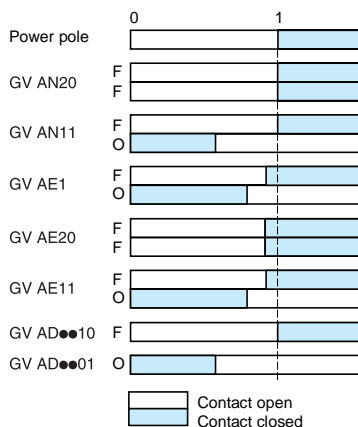

Operation of fault signalling contacts

GV AM11
Change of state following tripping on short-circuit.

GV AD10●● and GV AD01●●
Change of state following tripping on short-circuit, overload or undervoltage.

(1) For application example of fault signalling contact and short-circuit signalling contact, see page 72.
 (2) Add an RC circuit type LA4 D to the load terminals, consult our catalogue "Control and protection components".

TeSys protection components


Thermal-magnetic motor circuit-breakers

GV3 ME80

Auxiliary contacts

Type of contacts			Instantaneous auxiliary contacts GV3 A01...A07							Fault signalling contacts GV3 A08 and A09							
Rated insulation voltage (Ui)	Conforming to IEC 60947-1	V	690							690							
	Conforming to CSA C22-2 n° 14, UL 508	V	600 (B600)							600 (B600)							
Conventional rated thermal current (Ith)	Conforming to IEC 60947-5-1	A	6							6							
	Conforming to CSA C22-2 n° 14, UL 508	A	5 (B600)							5 (B600)							
Mechanical durability (C.O.: Close - Open)		C.O.	100 000							1000							
Operational power and current conforming to IEC 60947-5-1 a.c. operation	Rated operational voltage (Ue)	V	48	110	220	380	440	500	690	48	110	220	380	440	500	690	
	Operational power	VA	AC-11/100 000 C.O.							AC-11/1000 C.O.							
	Occasional breaking and making capacities	kVA	350	500	800	850	700	700	400	240	460	800	850	450	450	200	
	Operational current (Ie)	A	4	12	20	20	15	15	10	2.4	8	12	15	12	12	8	
	Operational current (Ie)	A	6	4.5	3.5	2.2	1.5	1.5	0.6	5	3.6	3.5	2.2	1	1	0.3	
Operational power and current conforming to IEC 60947-5-1 d.c. operation	Rated operational voltage (Ue)	V	24	48	60	110	220	24	48	60	110	220					
	Operational power	W	DC-11/100 000 C.O.							DC-11/1000 C.O.							
	Occasional breaking and making capacities	W	180	240	180	140	120	120	120	90	70	60					
	Operational current (Ie)	A	240	360	240	210	180	180	180	135	105	90					
	Operational current (Ie)	A	6	5	3	1.3	0.5	5	2.5	1.5	0.7	0.3					
Short-circuit protection			By GB2 CB08 circuit-breaker or gG fuse, 6A max														
Connection	Number of conductors		1				2										
	Solid cable	mm ²	1...2.5				1...2.5										
	Flexible cable without cable end	mm ²	0.75...2.5				0.75...2.5										
	Flexible cable with cable end	mm ²	0.75...2.5				0.75...1.5										

Contact operation

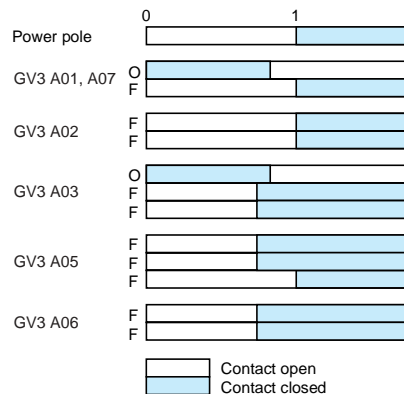

GV3 A08 and A09 change state following tripping on short-circuit or overload

Contact open
 Contact closed

Auxiliary contact characteristics																	
Type of contacts			GV7 AE11							GV7 AB11							
Rated insulation voltage (Ui) (associated insulation coordination)	Conforming to IEC 60947-1	V	690							690							
Conventional thermal current (Ith)	Conforming to IEC 60947-5-1	A	6							6							
Mechanical durability (C.O.: Close - Open)		C.O.	50 000							50 000							
Operational current conforming to IEC 60947-5-1 a.c. operation	Rated operational voltage (Ue)	V	AC-12 or AC-15. 50 000 C.O.							AC-12 or AC-15. 50 000 C.O.							
	Rated operational current (Ie)	AC-12	A	24	48	110	230/240	380/415	440	690	24	48	110	230/240	380/415	440	690
		AC-15	A	6	6	5	4	3	3	0.1	5	5	4	3	2.5	2.5	0.1
Operational current conforming to IEC 60947-5-1 d.c. operation	Rated operational voltage (Ue)	V	DC-12 or DC-14. 50 000 C.O.							DC-12 or DC-14. 50 000 C.O.							
	Rated operational current (Ie)	DC-12	A	2.5	2.5	0.8	0.3	2	2	0.5	-						
		DC-14	A	1	0.2	0.5	0.03	0.5	0.1	0.25	-						
Minimum operational conditions d.c. operation		V	17							12							
		mA	5							5							
Short-circuit protection			By GB2 CB●● circuit-breaker (rating according to operational current for Ue ≤ 415 V) or gG fuse, 10 A max.														
Cabling	Solid cable	mm²	1 x 1.5 conductor							1 x 1.5 conductor							
	Flexible cable without cable end	mm²	1 x 1.5 conductor							1 x 1.5 conductor							
	Flexible cable with cable end	mm²	1 x 1.5 conductor							1 x 1.5 conductor							

Characteristics of Start-Stop and fault signalling contacts								
Rated insulation voltage (Ui)	Conforming to IEC 60947-1	V	500					
Rated operational voltage (Ue)	Conforming to IEC 60947-1	V	500					
Conventional thermal current (Ith)	Conforming to IEC 60947-5-1	A	6					
Operational power and current conforming to IEC 60947-5-1 a.c. operation (C.O.: Close - Open)	Rated operational voltage (Ue)	V	AC-15. 20 000 C.O.					
	Operational power	VA	48	110/127	220/240	380/415	440	500
	Occasional breaking and making capacities	VA	4000	12 000	20 000	20 000	15 000	15 000
	Rated operational current (Ie)	A	6	4.5	3.5	2.2	1.5	1.5
Operational power and current conforming to IEC 60947-5-1 d.c. operation (C.O.: Close - Open)	Rated operational voltage (Ue)	V	DC-13. 1000 C.O.					
	Operational power	W	24	48	60	110	220	
	Occasional breaking and making capacities	W	240	280	240	210	180	
	Rated operational current (Ie)	A	6	5	3	1.3	0.5	
Short-circuit protection	Conforming to IEC 60947-5-1		By GB2 CB08 circuit-breaker or gG fuse, 6A max					
Cabling	Solid cable	mm²	1 x 1...4 conductor					
	Flexible cable without cable end	mm²	1 x 2.5 conductor					
	Flexible cable with cable end	mm²	1 x 1...2.5 conductor or 2 x 1...2.5 conductors					
Tightening torque		N.m	0.8					

Characteristics of electric trips									
Circuit-breaker type			GV2 ME, GV2 P GV3 P, GV3 L		GV2 ME only	GV3 ME80		GV7 R	
Type of trip			GV AU	GV AS	GV AX (1)	GV3 B	GV3 D	GV7 AU	GV7 AS
Rated insulation voltage (Ui)	Conforming to IEC 60947-1	V	690	690	500	690	690	690	690
	Conforming to CSA C22-2 n° 14, UL 508	V	600	600	–	600 (B600)	600 (B600)	600	600
Operational voltage	Conforming to IEC 60947-1	V	0.85...1.1 Un	0.7... 1.1 Un	0.85...1.1 Un	0.8...1.1 Un		0.85... 1.1 Un	0.7... 1.1 Un
Drop-out voltage		V	0.7...0.35 Un	0.75... 0.2 Un	0.7...0.35 Un	0.7...0.35 Un		0.35... 0.7 Ue	0.2... 0.75 Ue
Inrush consumption	~	VA	12	14	12	12		< 10	
	≡	W	8	10.5	8	7		< 5	
Sealed consumption	~	VA	3.5	5	3.5	7		< 5	
	≡	W	1.1	1.6	1.1	2.5		< 5	
Operating time	Conforming to IEC 60947-1		From the moment the voltage reaches its operational value until opening of the circuit-breaker.						
		ms	10...15			10	15	< 50	
On-load factor			100 %			100 %		100 %	
Cabling	Number of conductors		2 or 4			1 or 2		1	
	Solid cable	mm ²	1...2.5			1...2.5		1.5	
	Flexible cable without cable end	mm ²	0.75...2.5			0.75...2.5		1.5	
	Flexible cable with cable end	mm ²	0.75...1.5			0.75...2.5		1	
Tightening torque		N.m	1.4 max			1.2		1.2	
Mechanical durability (C.O.: Close - Open)		C.O.	30 000 (GV2 ME and GV2 P) 10 000 (GV3 P and GV3 L)			50 % of the mechanical durability of the circuit-breaker			

(1) Wiring scheme of undervoltage trip for dangerous machines (conforming to INRS) on GV2 ME only, see page 72.

Characteristics of 3-pole busbars GV2 G●●● and GV3 G364

			GV2 G●●●	GV3 G364
Rated insulation voltage (Ui)	Conforming to IEC 60947-1	V	690	690
Conventional thermal current (Ith)	Conforming to IEC 60439-1	A	63	115
Permissible peak current (I peak)		kA	11	20
Permissible thermal limit (I ² t)		kA ² s	104	300
Degree of protection	Conforming to IEC 60529		IP 20	IP 20
Terminal block			Yes	–

Characteristics of terminal blocks GV2 G05 and GV1 G09 (for GV2 ME and GV2 P)


Rated insulation voltage (Ui)	Conforming to IEC 60947-1	V	690
Conventional thermal current (Ith)	Conforming to IEC 60439-1	A	63
Degree of protection	Conforming to IEC 60529		IP 20
Connection	Solid cable	mm ²	1 x 1.5 to 25 conductor or 2 x 1.5 to 10 conductors
	Flexible cable without cable end	mm ²	1 x 1.5 to 25 conductor or 2 x 2.5 to 10 conductors
	Flexible cable with cable end	mm ²	1 x 1.5 to 16 conductor or 2 x 1.5 to 4 conductors
Tightening torque	Connector	N.m	2.2
	Screw clamp terminals	N.m	1.7

Characteristics of current limiters (GV2 ME and GV2 P)

Type			GV1 L3	LA9 LB920		
Rated insulation voltage (Ui)	Conforming to IEC 60947-1	V	690	690		
Conventional thermal current (Ith)	Conforming to IEC 60947-1	A	63	63		
Operating threshold	rms current	A	1500 (non adjustable threshold)	1000 (non adjustable threshold)		
Connection			1 conductor	2 conductors	1 conductor	2 conductors
	Solid cable	mm ²	1.5...25	1.5...10	1.5...25	1.5...10
	Flexible cable without cable end	mm ²	1.5...25	2.5...10	1.5...25	1.5...10
	Flexible cable with cable end	mm ²	1.5...16	1.5... 4	1.5...16	1.5... 4
Tightening torque		N.m	2.2			

Thermal-magnetic tripping curves for GV2 ME and GV2 P

Average operating times at 20 °C related to multiples of the setting current

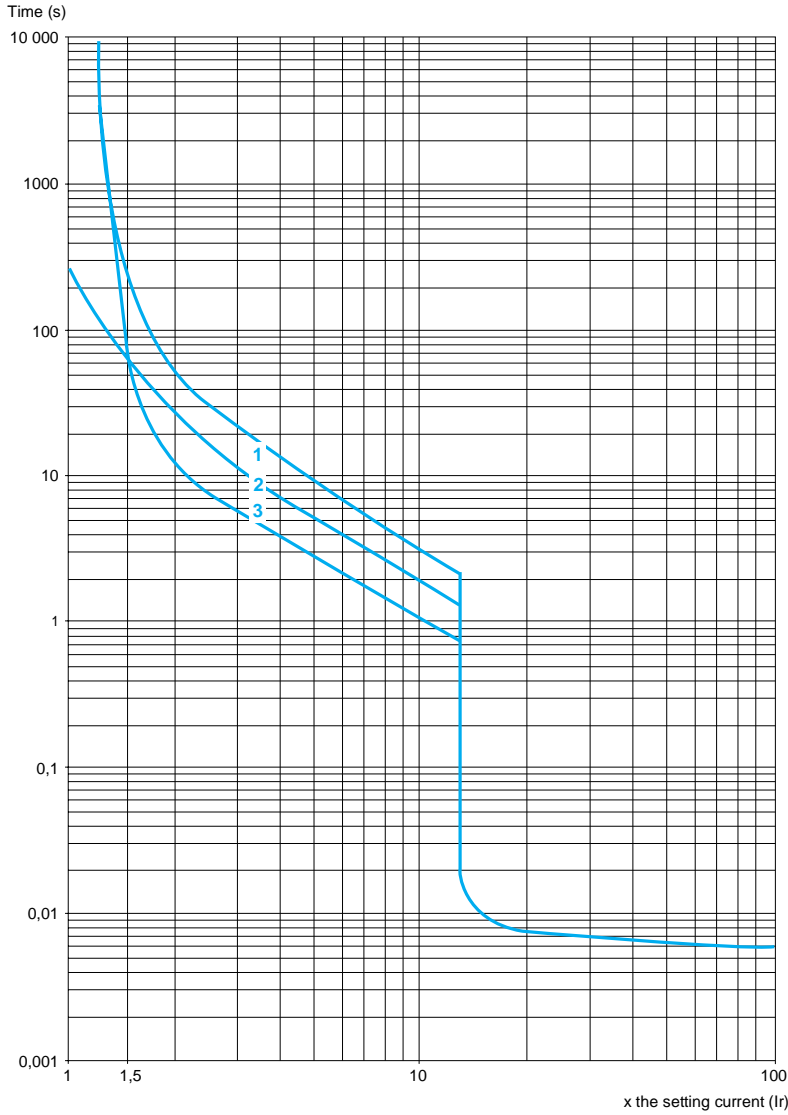


- 1 3 poles from cold state
- 2 2 poles from cold state
- 3 3 poles from hot state

Current limitation on short-circuit for GV2 ME and GV2 P (3-phase 400/415 V)

Dynamic stress

$I_{peak} = f(\text{prospective } I_{sc})$ at $1.05 U_e = 435 \text{ V}$

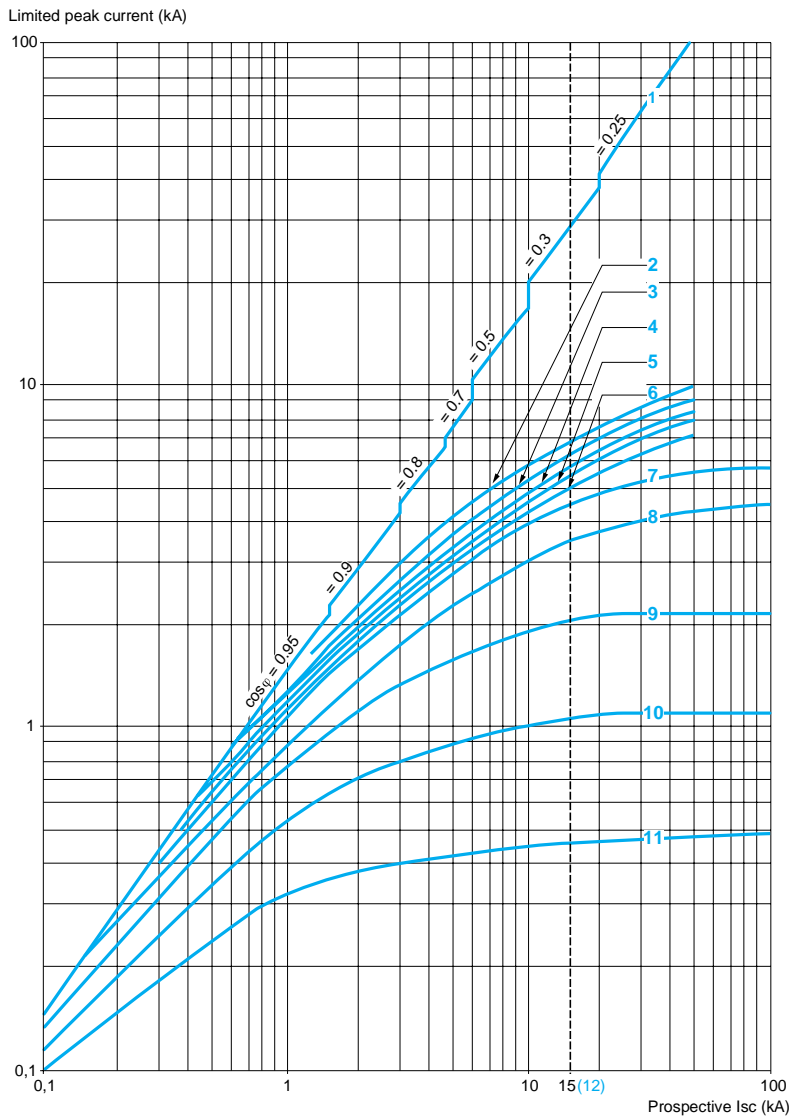


- 1 Maximum peak current
- 2 24 -32 A
- 3 20 -25 A
- 4 17 -23 A
- 5 13 -18 A
- 6 9 -14 A
- 7 6 -10 A
- 8 4 -6.3 A
- 9 2.5 -4 A
- 10 1.6 -2.5 A
- 11 1 -1.6 A
- 12 Limit of rated ultimate breaking capacity on short-circuit of GV2 ME (14, 18, 23 and 25 A ratings)

Thermal limit on short-circuit for GV2 ME

Thermal limit in kA²s in the magnetic operating zone

Sum of $I^2dt = f$ (prospective I_{sc}) at 1.05 U_e = 435 V

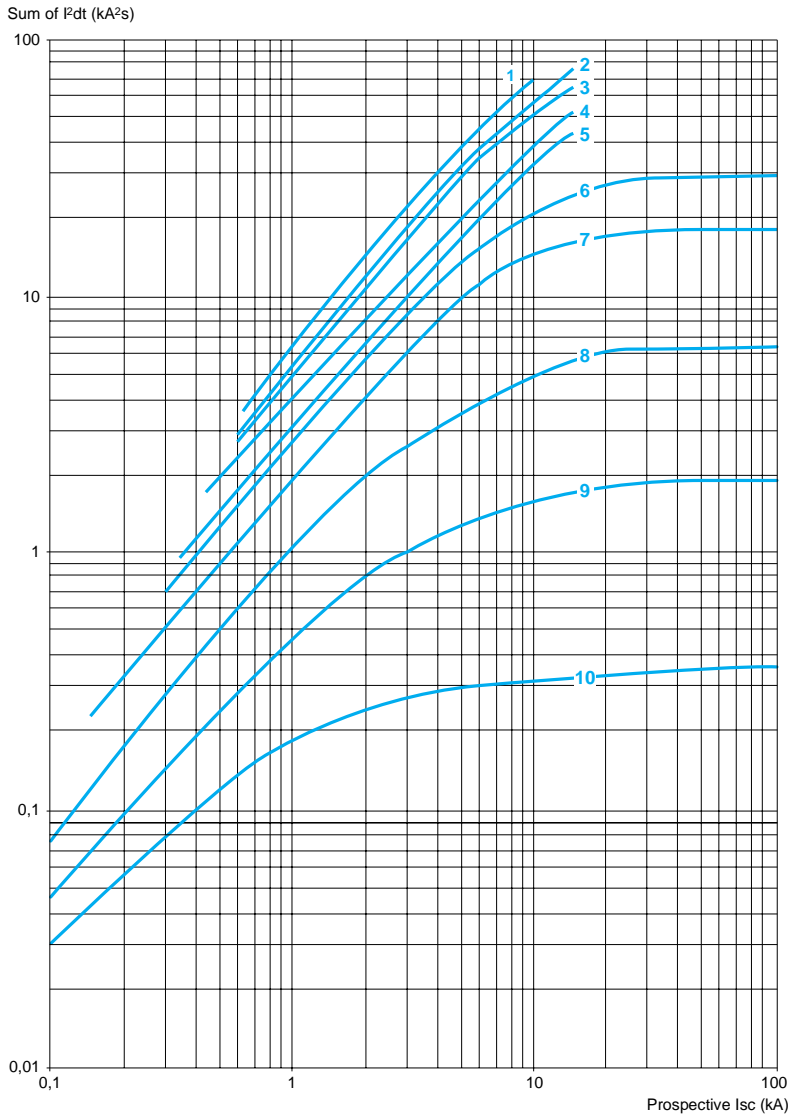


- 1 24 -32 A
- 2 20 -25 A
- 3 17 -23 A
- 4 13 -18 A
- 5 9 -14 A
- 6 6 -10 A
- 7 4 -6.3 A
- 8 2.5 -4 A
- 9 1.6 -2.5 A
- 10 1 -1.6 A

Thermal limit on short-circuit for GV2 P

Thermal limit in kA^2s in the magnetic operating zone


Sum of $I^2dt = f$ (prospective I_{sc}) at $1.05 U_e = 435 V$

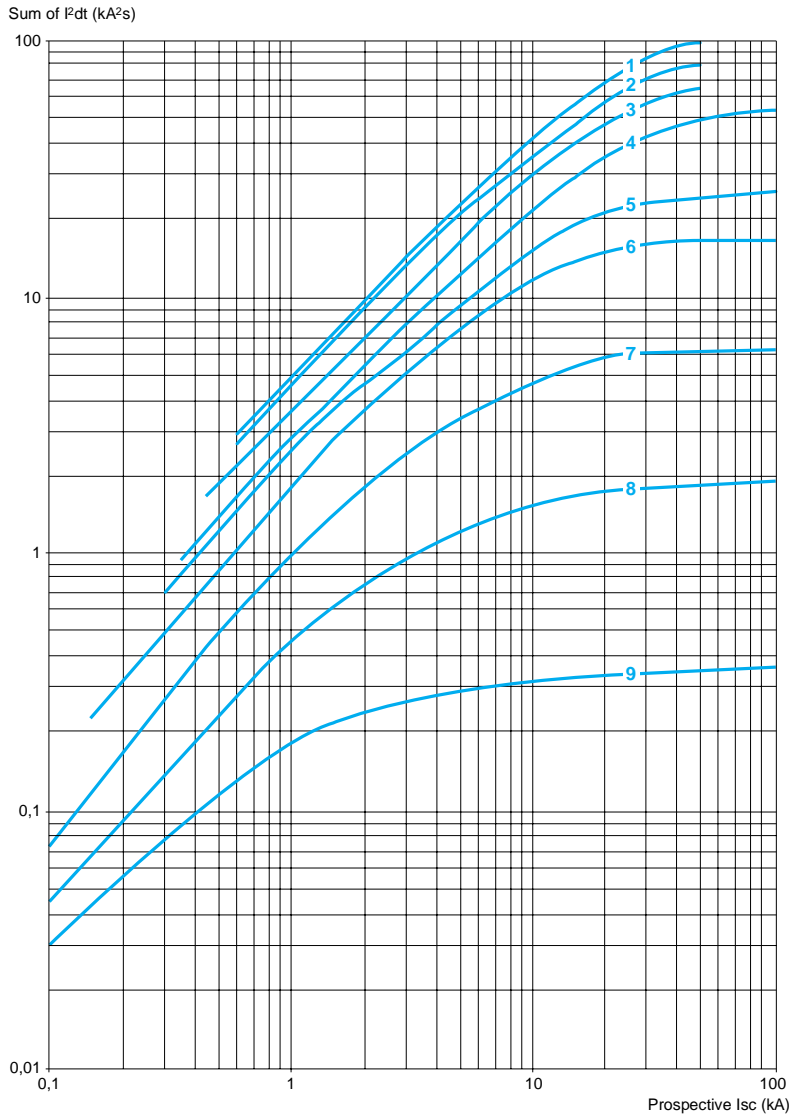

- 1 24 -32 A
- 1 20 -25 A
- 2 17 -23 A
- 3 13 -18 A
- 4 9 -14 A
- 5 6 -10 A
- 6 4 -6.3 A
- 7 2.5 -4 A
- 8 1.6 -2.5 A
- 9 1 -1.6 A

Thermal-magnetic tripping curves

Average operating times at 20 °C related to multiples of the setting current

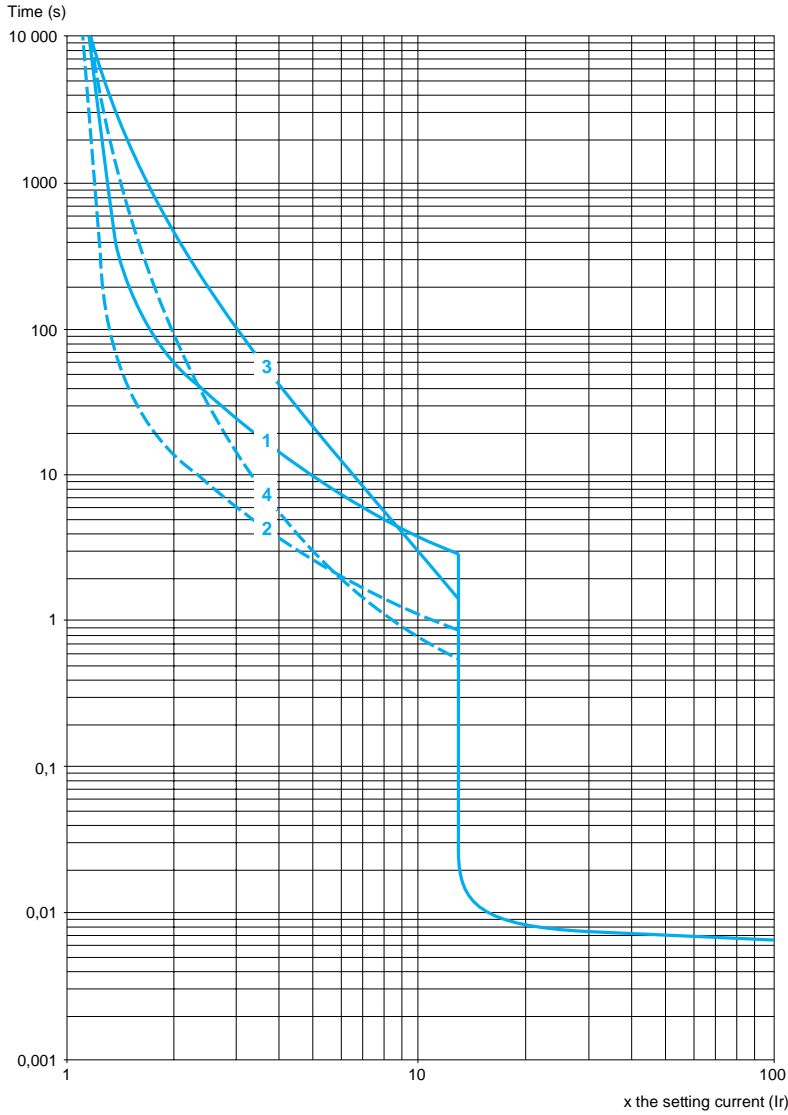


- 1 3 poles from cold state (GV3 P)
- 2 3 poles from hot state (GV3 P)
- 3 3 poles from cold state (GV3 ME80)
- 4 3 poles from hot state (GV3 ME80)

Current limitation on short-circuit (3-phase 400/415 V)

Dynamic stress

$I_{peak} = f(\text{prospective } I_{sc}) \text{ at } 1.05 U_e = 435 \text{ V}$

Limited peak current (kA)

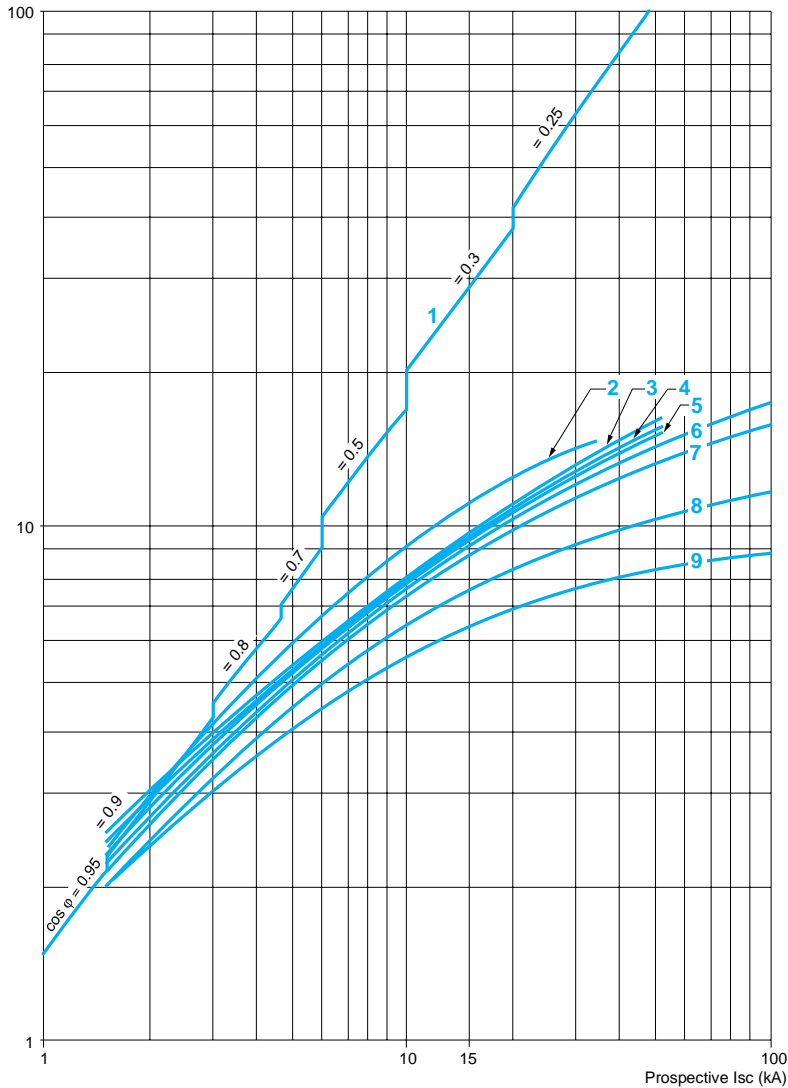


- 1 Maximum peak current
- 2 56 -80 A
- 3 48 -65 A
- 4 37 -50 A
- 5 30 -40 A
- 6 23 -32 A
- 7 17 -25 A
- 8 12 -18 A
- 9 9 -13 A

Maximum thermal limit on short-circuit

Thermal limit in kA²s in the magnetic operating zone

Sum of $I^2dt = f$ (prospective I_{sc}) at 1.05 $U_e = 435$ V


Sum of I^2dt (kA²s)

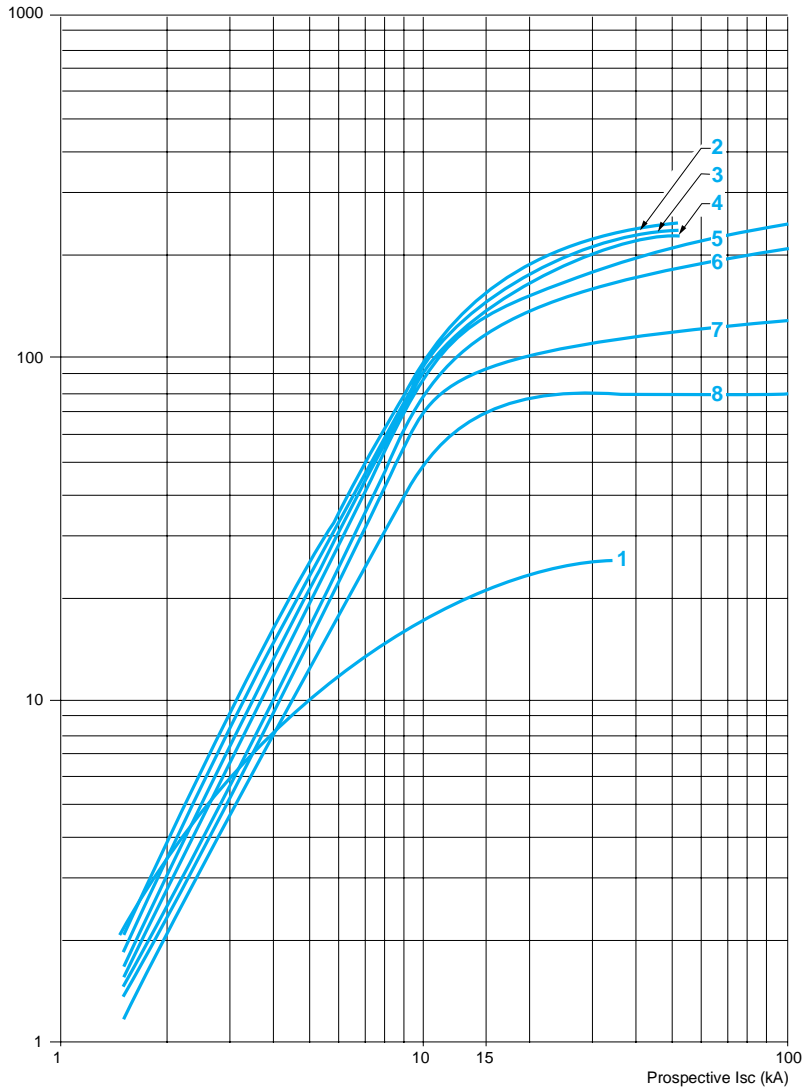

- 1 56-80 A (GV3 ME80)
- 2 48-65 A (GV3 P65)
- 3 37-50 A (GV3 P50)
- 4 30-40 A (GV3 P40)
- 5 23-32 A (GV3 P32)
- 6 17-25 A (GV3 P25)
- 7 12-18 A (GV3 P18)
- 8 9-13 A (GV3 P13)

Thermal-magnetic tripping curves for GV7 R

Average operating times at 20 °C related to multiples of the setting current

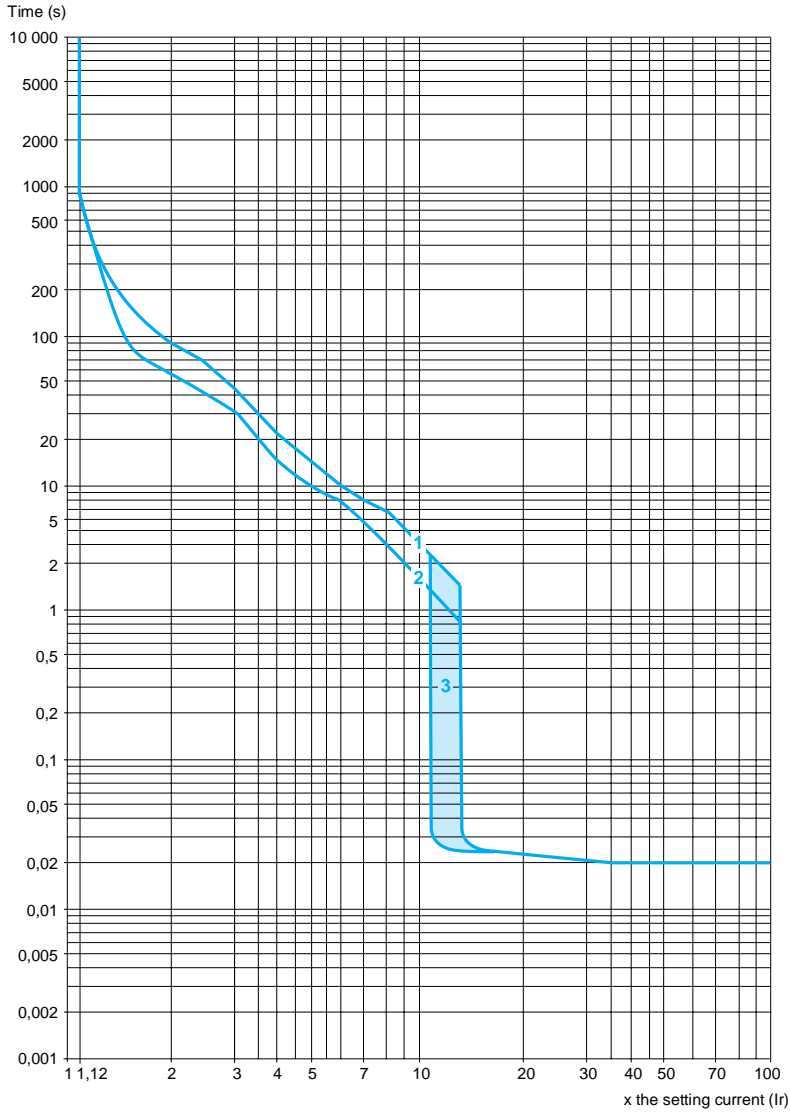

1 Cold state curve

2 Cold state curve

3 12...14 Ir

In the event of total phase failure, tripping occurs after $4 \text{ s} \pm 20 \%$


Current limitation on short-circuit (3-phase 400/415 V)

Dynamic stress

$I_{peak} = f(\text{prospective } I_{sc})$

For GV7 RE only


Limited peak current (kA)

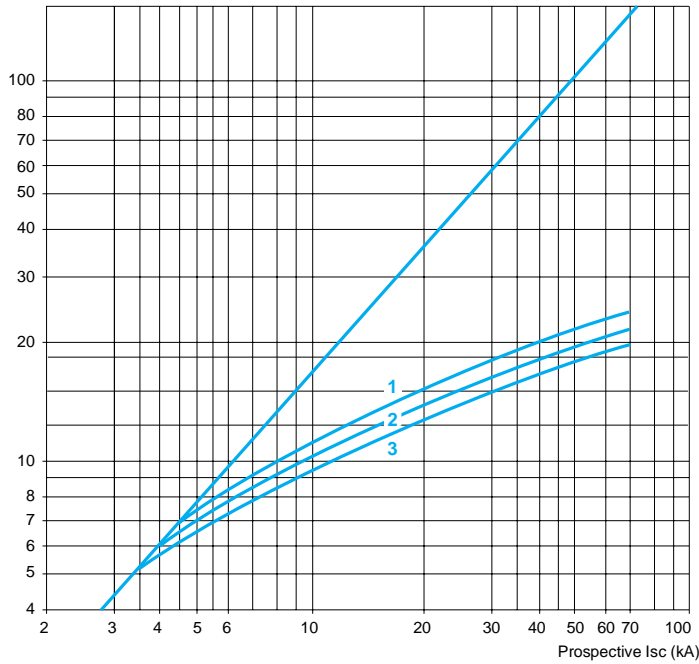

- 1 GV7 RE220
- 2 GV7 RE150
- 3 GV7 RE100

For GV7 RS only

Limited peak current (kA)

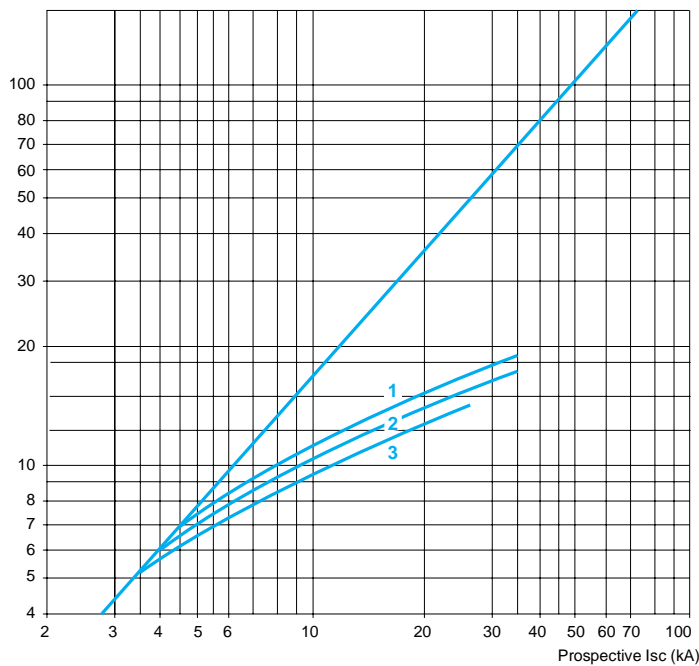

- 1 GV7 RS220
- 2 GV7 RS150
- 3 GV7 RS100


Thermal limit (3-phase 400/415 V)

Thermal limit

Sum of $I^2dt = f$ (prospective I_{sc})

For GV7 RE only


Sum of I^2dt (A²s)

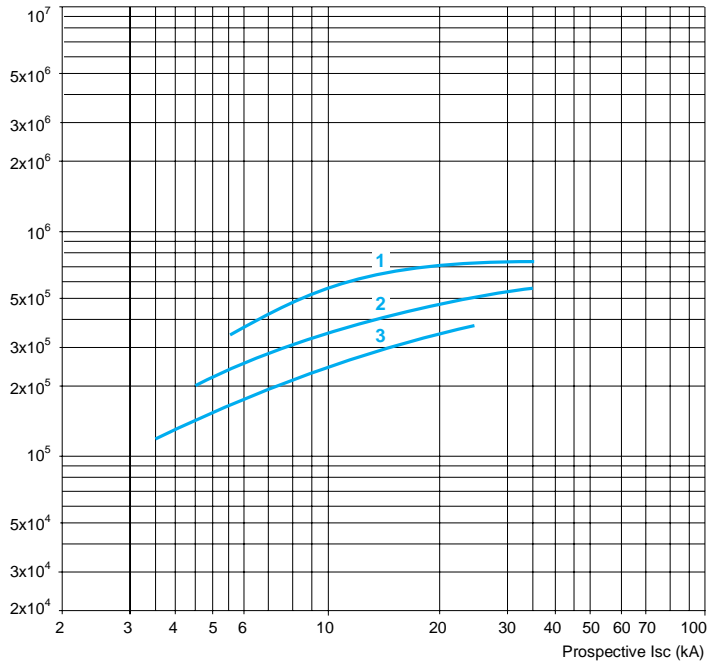

- 1 GV7 RE220
- 2 GV7 RE150
- 3 GV7 RE100

For GV7 RS only

Sum of I^2dt (A²s)

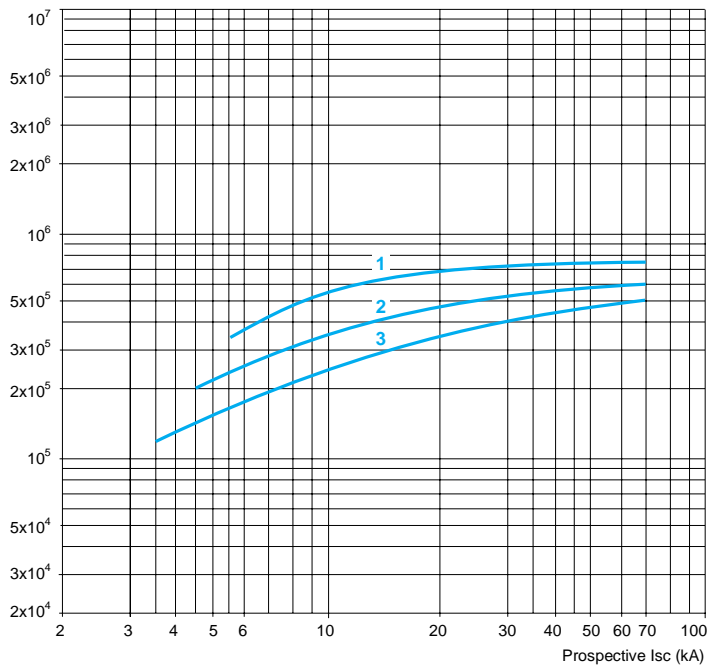

- 1 GV7 RS220
- 2 GV7 RS150
- 3 GV7 RS100


Current limitation on short-circuit (3-phase 690 V)

Dynamic stress

$$I_{\text{peak}} = f(\text{prospective } I_{\text{sc}})$$

For GV7 RE only


Limited peak current (kA)

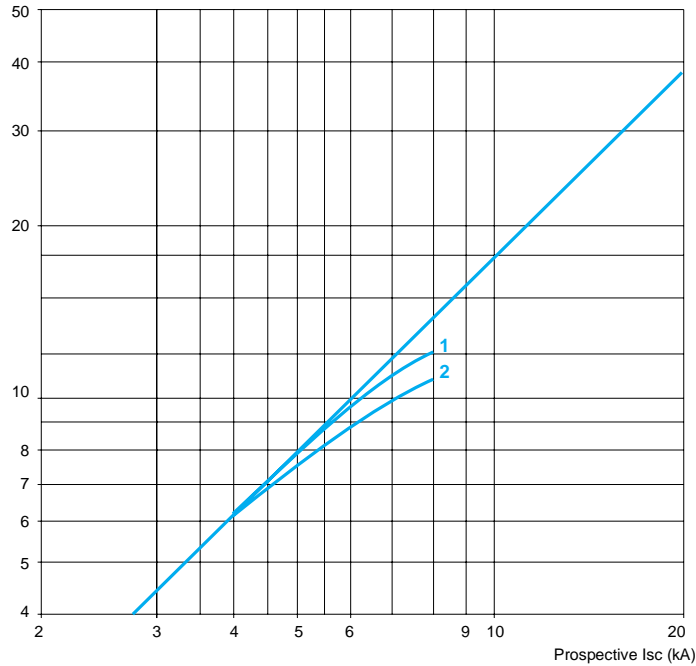

- 1 GV7 RE220
- 2 GV7 RE150 and GV7 RE100

For GV7 RS only

Limited peak current (kA)

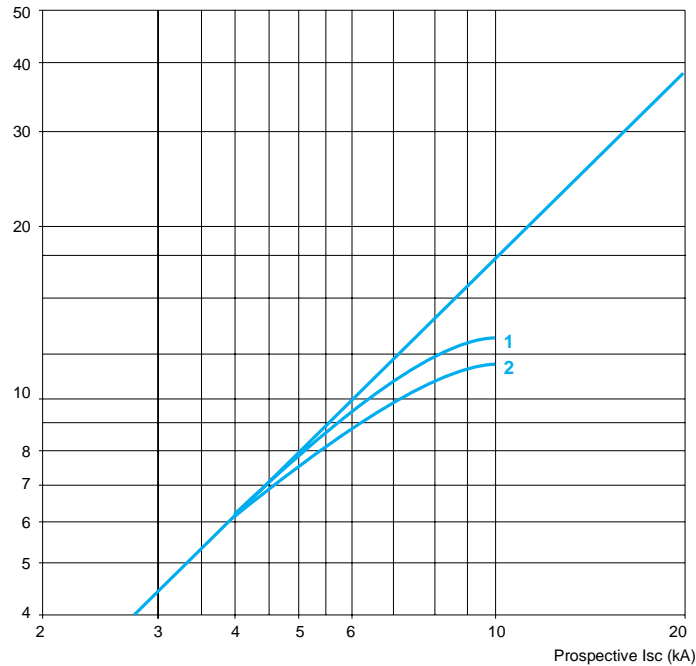

- 1 GV7 RS220
- 2 GV7 RS150 and GV7 RS100


Thermal limit on short-circuit (3-phase 690 V)

Thermal limit

Sum of $I^2dt = f$ (prospective I_{sc})

For GV7 RE only


Sum of I^2dt (A²s)

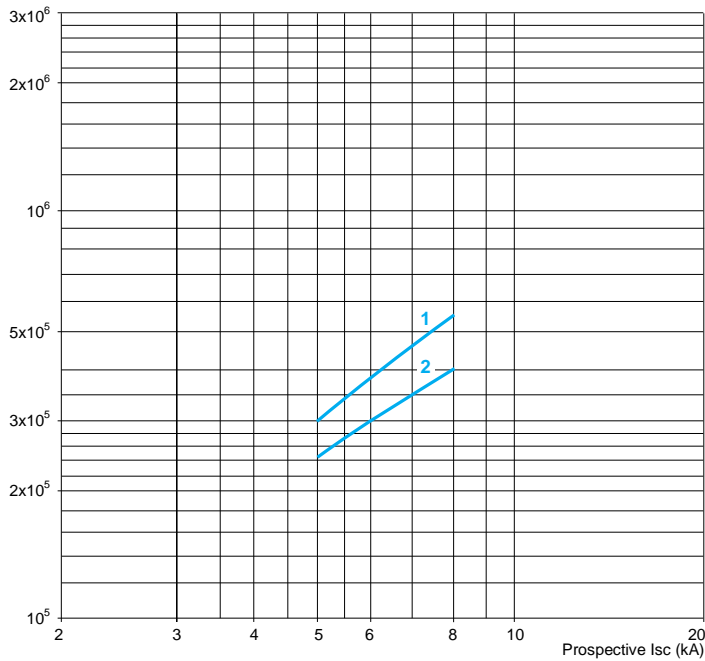

- 1 GV7 RE220
- 2 GV7 RE150 and GV7 RE100


For GV7 RS only

Sum of I^2dt (A²s)

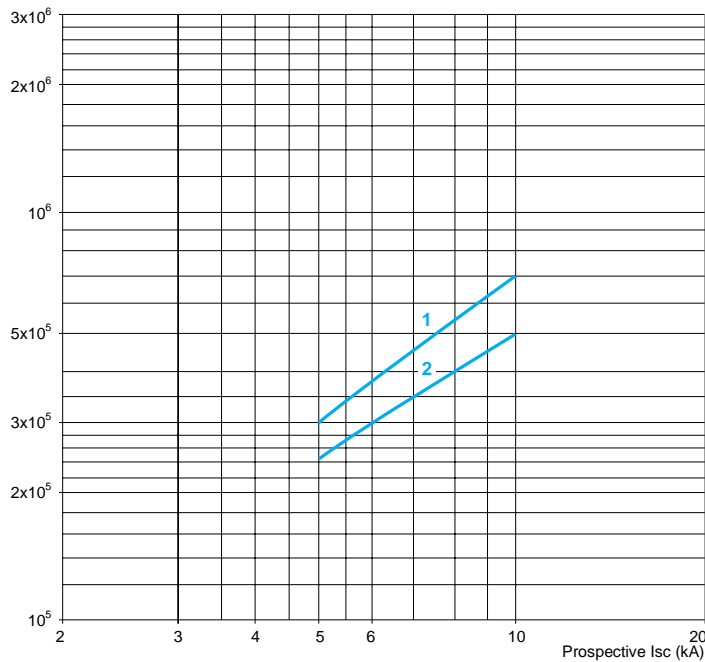

- 1 GV7 RS220
- 2 GV7 RS150 and GV7 RS100


Thermal-magnetic tripping curves for GV2 RT

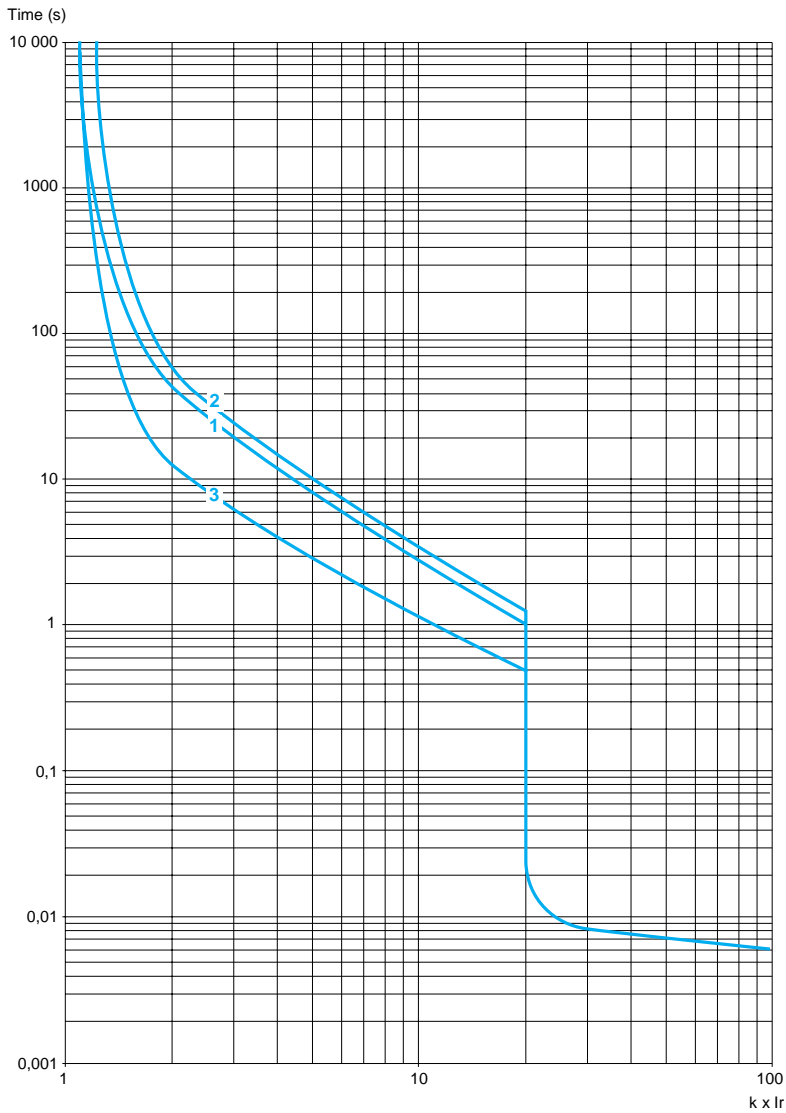

- 1 3 poles from cold state
- 2 2 poles from cold state
- 3 3 poles from hot state

Tripping curves for GV2 L or LE combined with thermal overload relay LRD or LR2 K

Average operating times at 20 °C related to multiples of the setting current

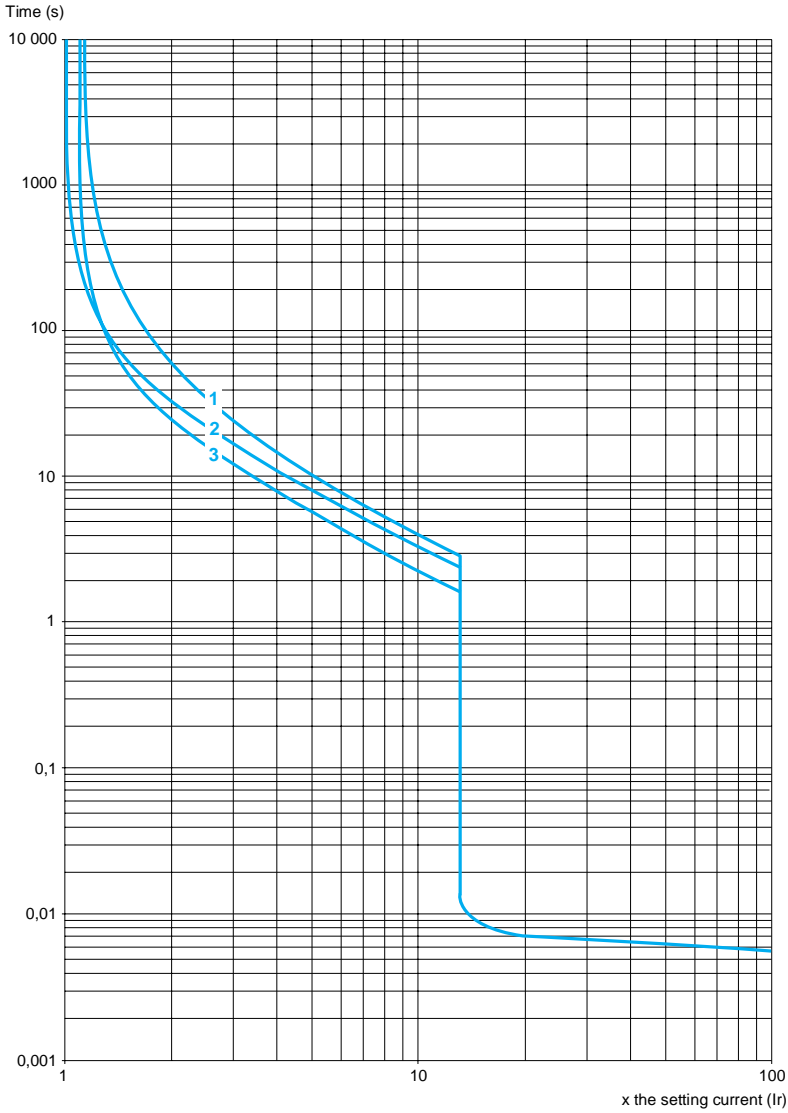


- 1 3 poles from cold state
- 2 2 poles from cold state
- 3 3 poles from hot state

Current limitation on short-circuit for GV2 L and GV2 LE only (3-phase 400/415 V)

Dynamic stress

$I_{peak} = f(\text{prospective } I_{sc}) \text{ at } 1.05 U_e = 435 \text{ V}$


Limited peak current (kA)

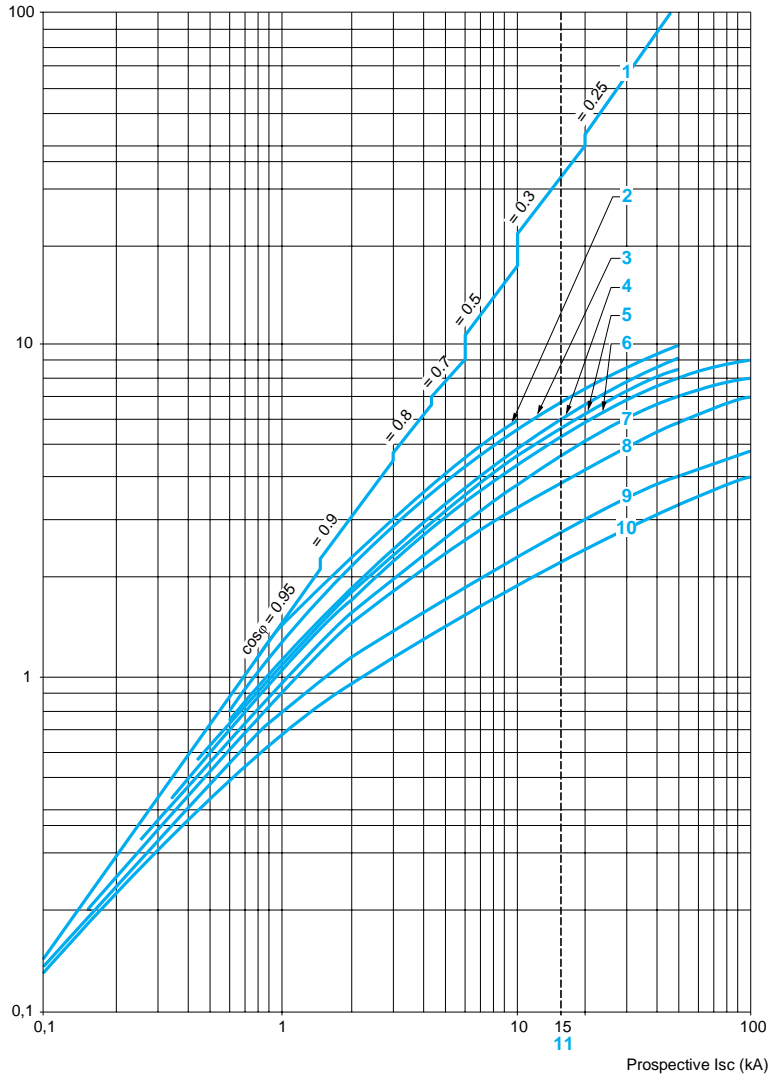

- 1 Maximum peak current
- 2 32 A
- 3 25 A
- 4 18 A
- 5 14 A
- 6 10 A
- 7 6.3 A
- 8 4 A
- 9 2.5 A
- 10 1.6 A
- 11 Limit of rated ultimate breaking capacity on short-circuit of GV2 LE (14, 18, 23 and 25 A ratings).

Current limitation on short-circuit for GV2 L and GV2 LE + thermal overload relay LRD or LR2 K (3-phase 400/415 V)
Dynamic stress

$I_{peak} = f(\text{prospective } I_{sc}) \text{ at } 1.05 U_e = 435 \text{ V}$

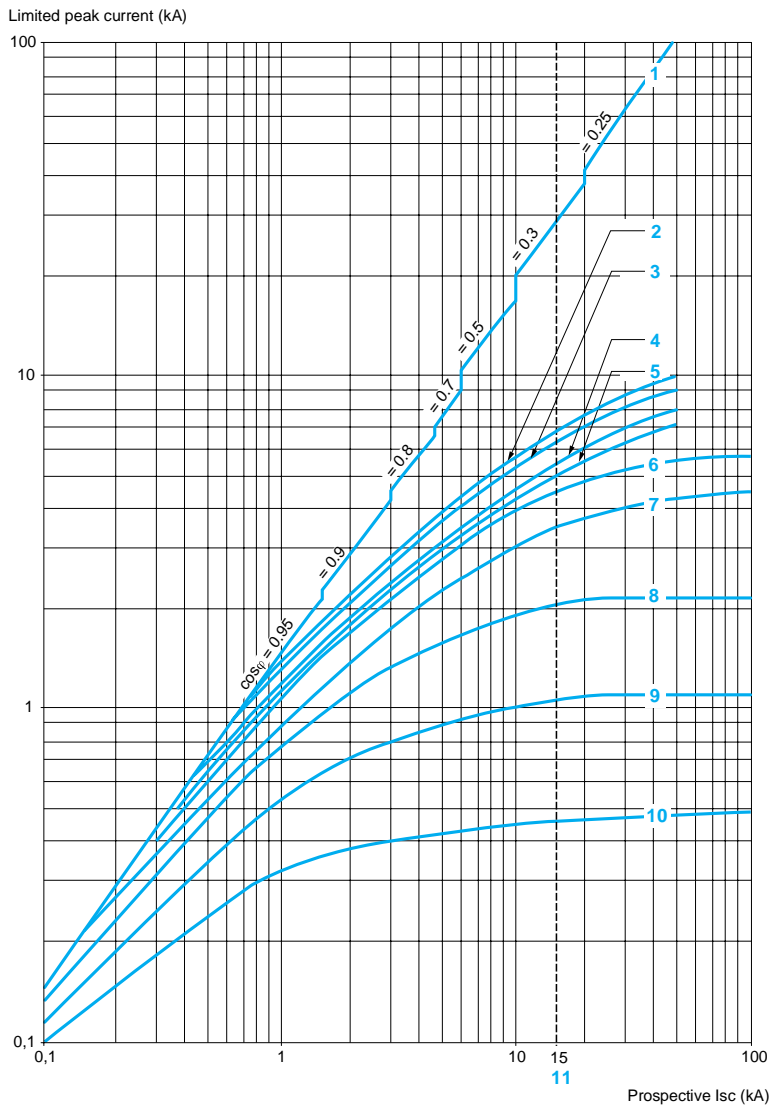


- 1 Maximum peak current
- 2 32 A
- 3 25 A
- 4 18 A
- 5 14 A
- 6 10 A
- 7 6.3 A
- 8 4 A
- 9 2.5 A
- 10 1.6 A
- 11 Limit of rated ultimate breaking capacity on short-circuit of GV2 LE (14, 18, 23 and 25 A ratings).

Thermal limit on short-circuit for GV2 LE only

Thermal limit in kA²s in the magnetic operating zone

Sum of I²dt = f (prospective I_{sc}) at 1.05 U_e = 435 V

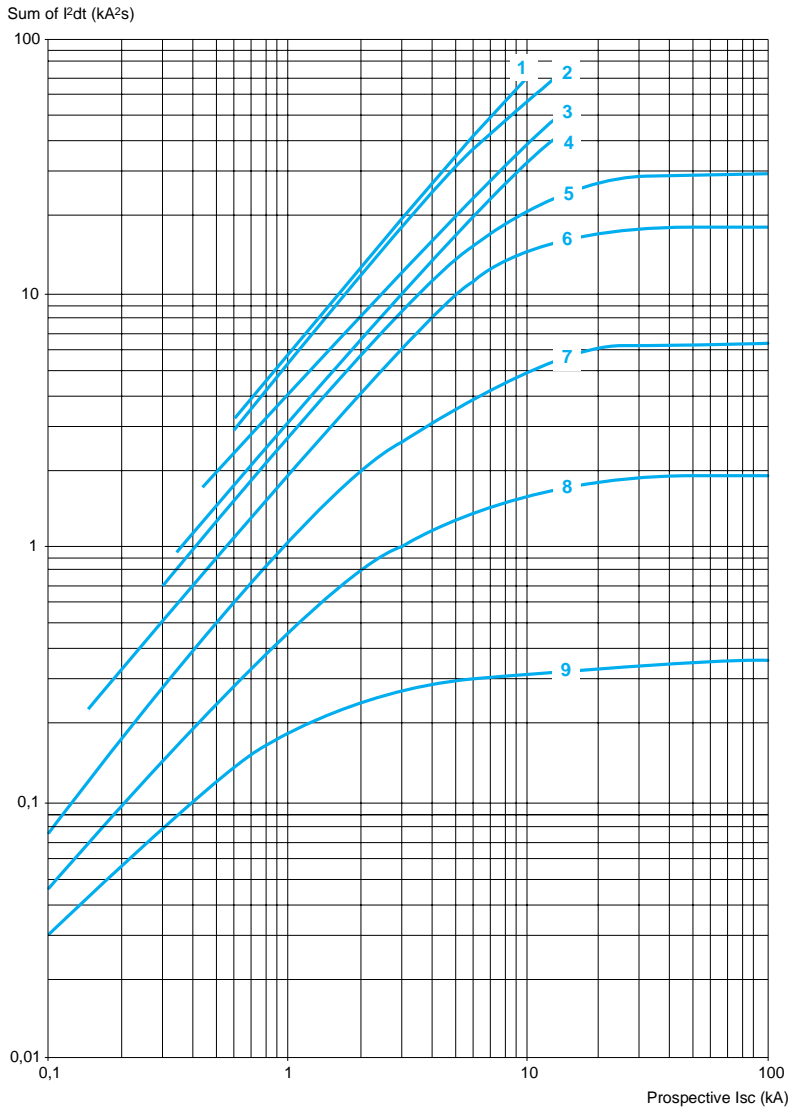


- 1 32 A
- 2 25 A
- 3 18 A
- 4 14 A
- 5 10 A
- 6 6.3 A
- 7 4 A
- 8 2.5 A
- 9 1.6 A

Thermal limit on short-circuit for GV2 L only

Thermal limit in kA^2s in the magnetic operating zone

Sum of $I^2dt = f$ (prospective I_{sc}) at $1.05 U_e = 435 V$

Sum of I^2dt (kA^2s)

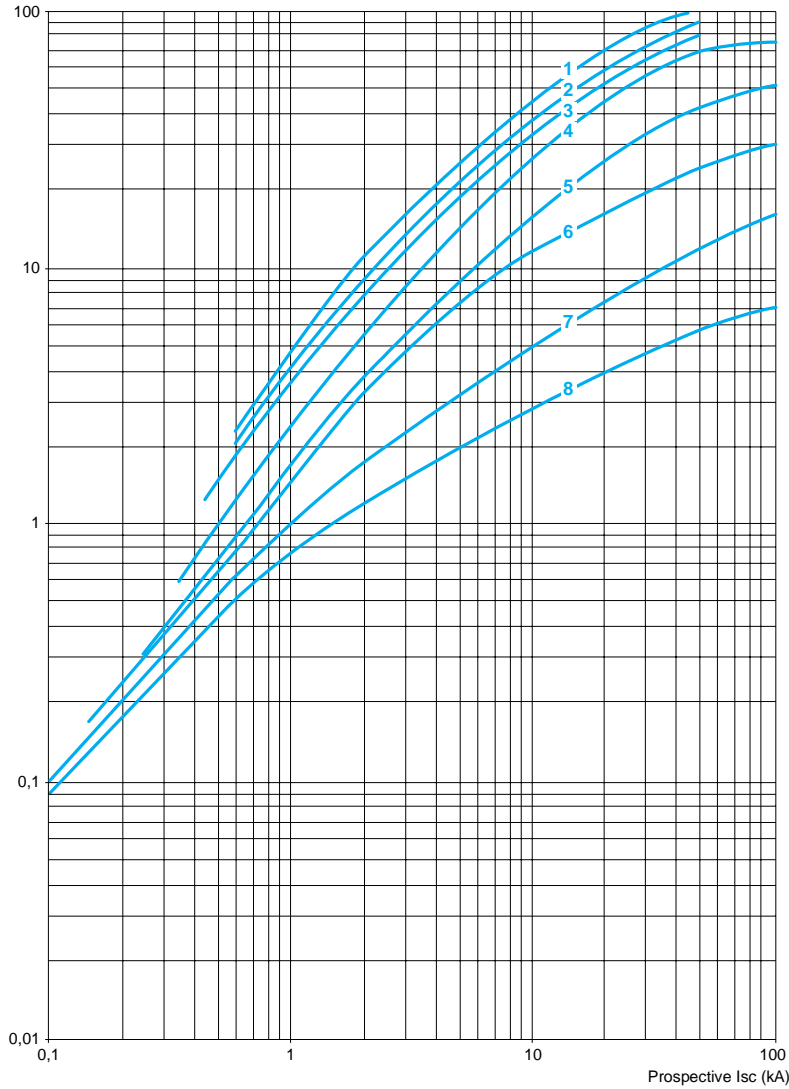


- 1 25 A and 32 A
- 2 18 A
- 3 14 A
- 4 10 A
- 5 6.3 A
- 6 4 A
- 7 2.5 A
- 8 1.6 A

Thermal limit on short-circuit for GV2 L and GV2 LE + thermal overload relay LRD or LR2 K

Thermal limit in kA²s in the magnetic operating zone


Sum of I²dt = f (prospective I_{sc}) at 1.05 U_e = 435 V

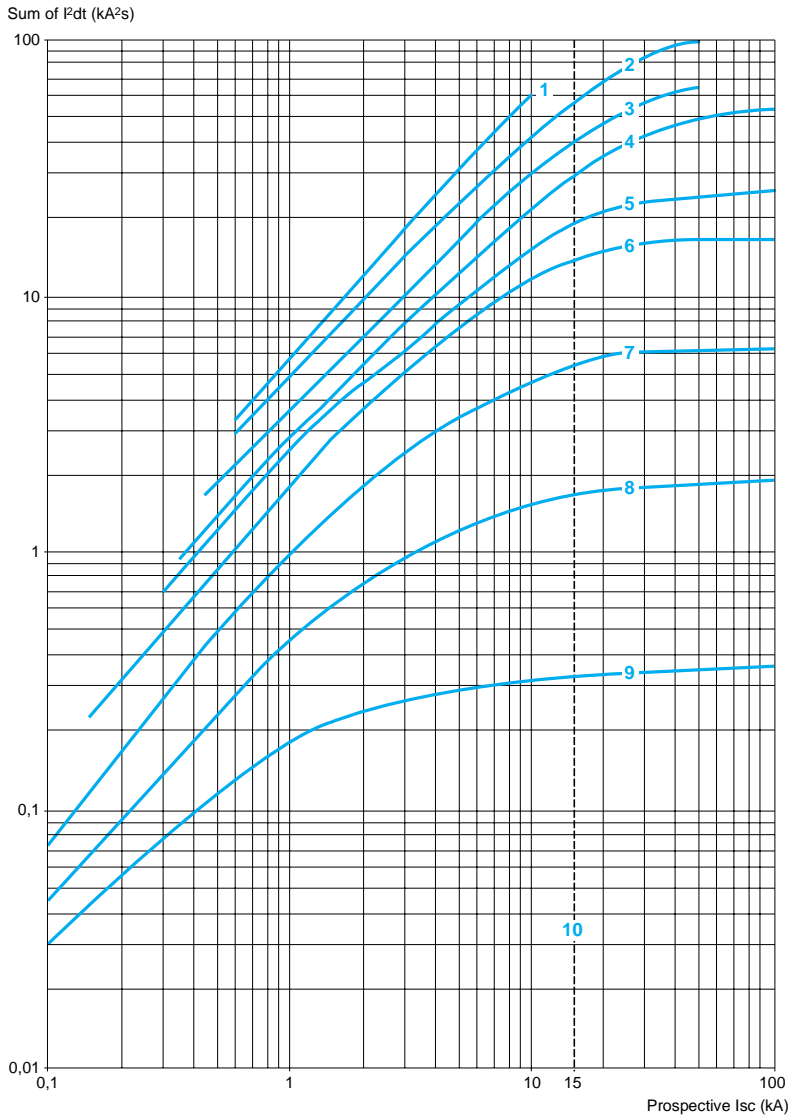

- 1 32 A (GV2 LE32)
- 2 25 A and 32 A (GV2 L32)
- 3 18 A
- 4 14 A
- 5 10 A
- 6 6.3 A
- 7 4 A
- 8 2.5 A
- 9 1.6 A
- 10 Limit of rated ultimate breaking capacity on short-circuit of GV2 LE (14, 18, 23 and 25 A ratings).

Tripping curves for GV3 L and GK3 EF80 combined with thermal overload relay LRD 33

Average operating time at 20 °C without prior current flow

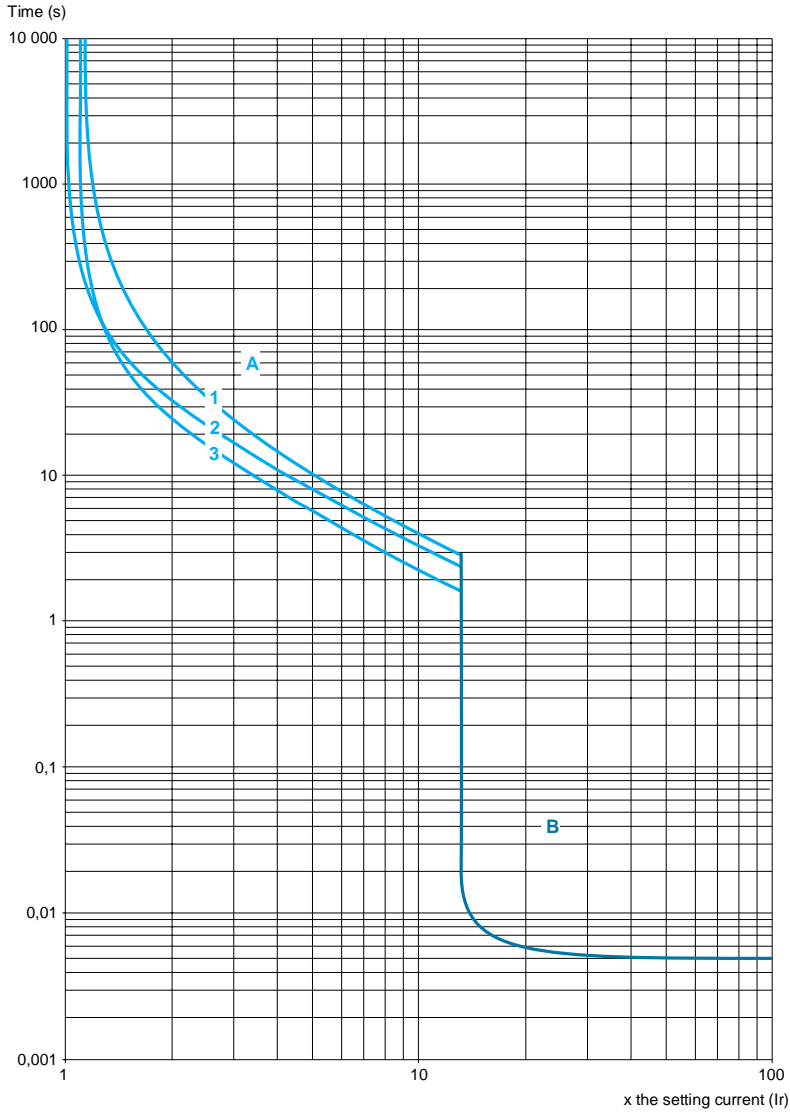

- 1 3 poles from cold state
- 2 2 poles from cold state
- 3 3 poles from hot state


- A Thermal overload relay protection zone
- B GK3 EF80 and GV3 protection zone L

Current limitation on short-circuit for GV3 L and GK3 EF80 (3-phase 400/415 V)

Dynamic stress

$I_{peak} = f(\text{prospective } I_{sc}) \text{ at } 1.05 U_e = 435 \text{ V}$

Limited peak current (kA)

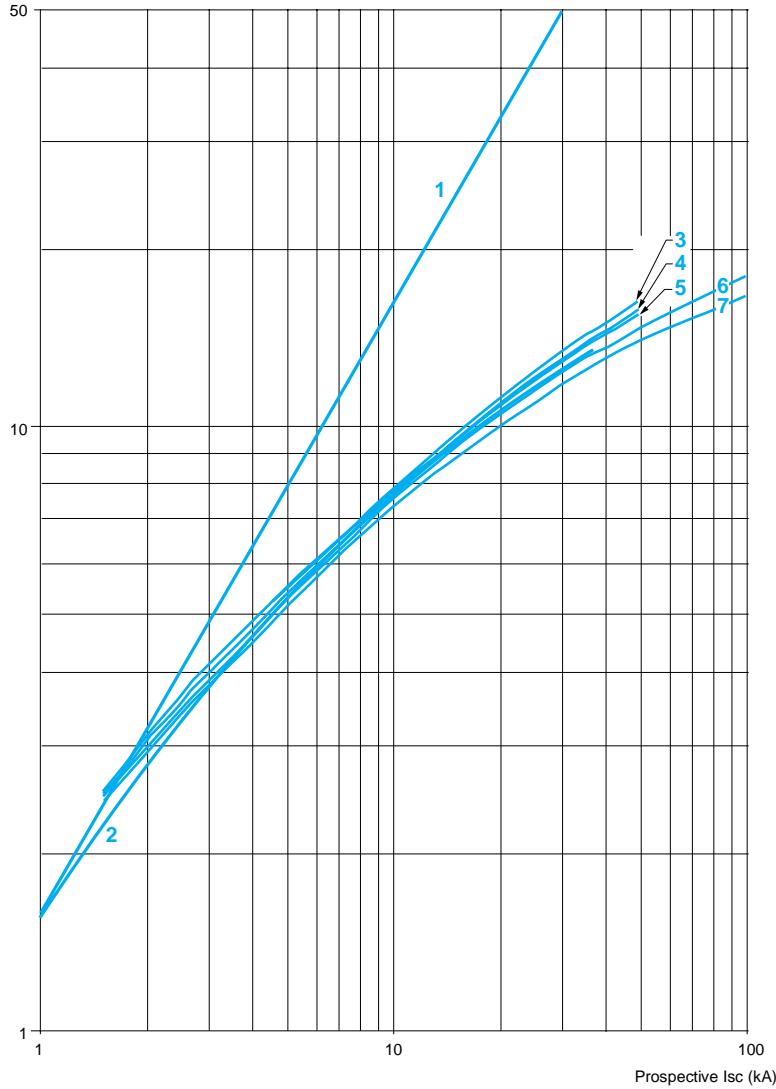


- 1 Maximum peak current
- 2 GK3 EF80
- 3 GV3 L65
- 4 GV3 L50
- 5 GV3 L40
- 6 GV3 L32
- 7 GV3 L25

Thermal limit on short-circuit for GV3 L and GK3 EF80

Thermal limit in A²s

Sum of I²dt = f (prospective I_{sc}) at 1.05 U_e = 435 V

Sum of I²dt (A²s)

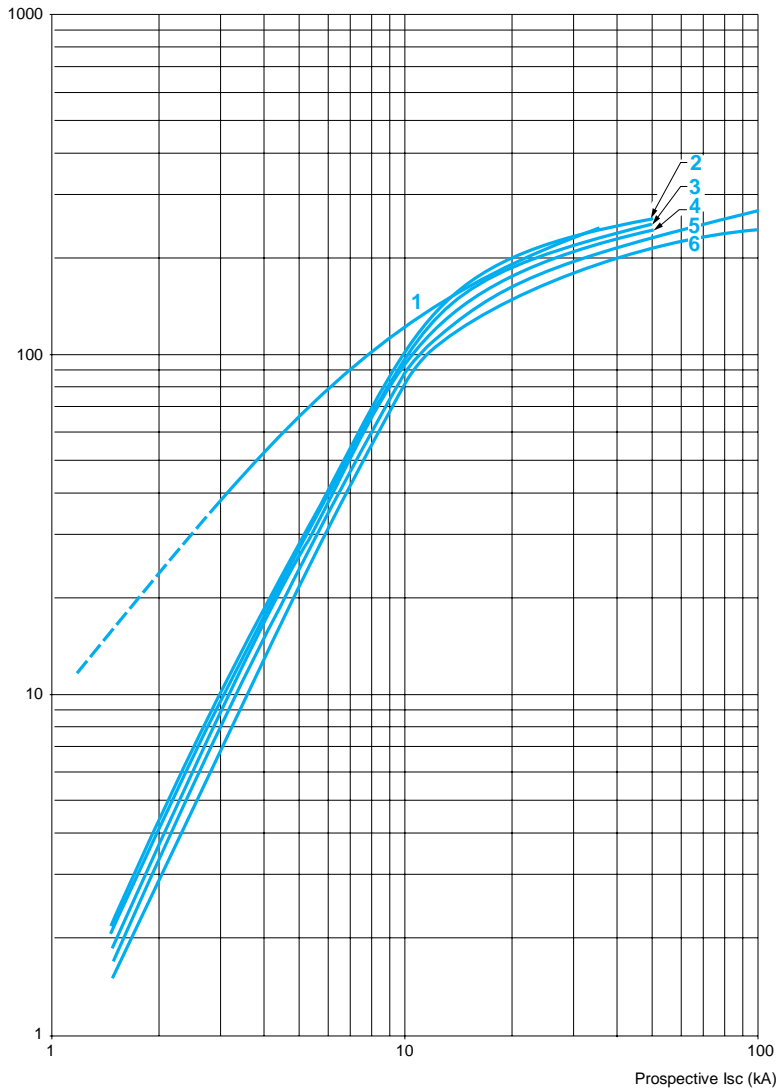

- 1 GK3 EF80
- 2 GV3 L65
- 3 GV3 L50
- 4 GV3 L40
- 5 GV3 L32
- 6 GV3 L25

TeSys protection components

Thermal-magnetic motor circuit-breakers

GV2 ME

533896



GV2 ME10

Motor circuit-breakers from 0.06 to 15 kW / 400 V, with screw clamp terminals

GV2 ME with pushbutton control

Standard power ratings of 3-phase motors 50-60 Hz in category AC-3									Setting range of thermal trips (2)	Magnetic tripping current I _d ± 20 %	Reference	Weight
400/415 V			500 V			690 V						
P	I _{cu}	I _{cs} (1)	P	I _{cu}	I _{cs} (1)	P	I _{cu}	I _{cs} (1)				
kW	kA	%	kW	kA	%	kW	kA	%	A	A		kg
–	–	–	–	–	–	–	–	–	0.1...0.16	1.5	GV2 ME01	0.260
0.06	★	★	–	–	–	–	–	–	0.16...0.25	2.4	GV2 ME02	0.260
0.09	★	★	–	–	–	–	–	–	0.25...0.40	5	GV2 ME03	0.260
0.12	★	★	–	–	–	0.37	★	★	0.40...0.63	8	GV2 ME04	0.260
0.18	★	★	–	–	–	–	–	–	–	–	–	–
0.25	★	★	–	–	–	0.55	★	★	0.63...1	13	GV2 ME05	0.260
0.37	★	★	0.37	★	★	–	–	–	1...16	22.5	GV2 ME06	0.260
0.55	★	★	0.55	★	★	0.75	★	★	–	–	–	–
–	–	–	0.75	★	★	1.1	★	★	–	–	–	–
0.75	★	★	1.1	★	★	1.5	3	75	1.6...2.5	33.5	GV2 ME07	0.260
1.1	★	★	1.5	★	★	2.2	3	75	2.5...4	51	GV2 ME08	0.260
1.5	★	★	2.2	★	★	3	3	75	–	–	–	–
2.2	★	★	3	50	100	4	3	75	4...6.3	78	GV2 ME10	0.260
3	★	★	4	10	100	5.5	3	75	6...10	138	GV2 ME14	0.260
4	★	★	5.5	10	100	7.5	3	75	–	–	–	–
5.5	15	50	7.5	6	75	9	3	75	9...14	170	GV2 ME16	0.260
–	–	–	–	–	–	11	3	75	–	–	–	–
7.5	15	50	9	6	75	15	3	75	13...18	223	GV2 ME20	0.260
9	15	40	11	4	75	18.5	3	75	17...23	327	GV2 ME21	0.260
11	15	40	15	4	75	–	–	–	20...25	327	GV2 ME22 (3)	0.260
15	10	50	18.5	4	75	22	3	75	24...32	416	GV2 ME32	0.260

Motor circuit-breakers from 0.06 to 15 kW / 400 V, with lugs

To order thermal magnetic circuit-breakers with connection by lugs, add the digit **6** to the end of reference selected above.

Example: **GV2 ME08** becomes **GV2 ME086**.

Thermal magnetic circuit-breakers GV2 ME with built-in auxiliary contact block

With instantaneous auxiliary contact block (composition, see page 55):

- GV AE1, add suffix **AE1TQ** to the motor circuit-breaker reference selected above.
Example: **GV2 ME01AE1TQ**.
- GV AE11, add suffix **AE11TQ** to the motor circuit-breaker reference selected above.
Example: **GV2 ME01AE11TQ**.
- GV AN11, add suffix **AN11TQ** to the motor circuit-breaker reference selected above.
Example: **GV2 ME01AN11TQ**.

These circuit-breakers with built-in contact block are sold in lots of 20 units in a single pack.

(1) As % of I_{cu}.

(2) The thermal trip setting must be within the range marked on the graduated knob.

(3) Maximum rating which can be mounted in enclosures **GV2 MC** or **MP**, please consult your Regional Sales Office.

★ > 100 kA.

TeSys protection components


Thermal-magnetic motor circuit-breakers

GV2 ME

53867



GV2 ME003



LA9 D99

Motor circuit-breakers from 0.06 to 11 kW, with spring terminal connections

GV2 ME (1) with pushbutton control

Standard power ratings of 3-phase motors 50-60 Hz in category AC-3						Setting range of thermal trips (3)	Magnetic tripping current I _d ± 20 %	Reference	Weight
400/415 V			500 V						
P	I _{cu}	I _{cs} (2)	P	I _{cu}	I _{cs} (2)				
kW	kA	%	kW	kA	%	A	A		kg
–	–	–	–	–	–	0.1...0.16	1.5	GV2 ME013	0.280
0.06	★	★	–	–	–	0.16...0.25	2.4	GV2 ME023	0.280
0.09	★	★	–	–	–	0.25...0.40	5	GV2 ME033	0.280
0.12	★	★	–	–	–	0.40...0.63	8	GV2 ME043	0.280
0.18	★	★	–	–	–	0.63...1	13	GV2 ME053	0.280
0.25	★	★	0.37	★	★	1...1.6	22.5	GV2 ME063	0.280
0.37	★	★	0.55	★	★	1.6...2.5	33.5	GV2 ME073	0.280
0.55	★	★	0.75	★	★	2.5...4	51	GV2 ME083	0.280
0.75	★	★	1.1	★	★	4...6.3	78	GV2 ME103	0.280
1.1	★	★	1.5	★	★	6...10	138	GV2 ME143	0.280
1.5	★	★	2.2	★	★	9...14	170	GV2 ME163	0.280
2.2	★	★	3	50	100	13...18	223	GV2 ME203	0.280
3	★	★	4	10	100	17...23	327	GV2 ME213	0.260
4	★	★	5.5	10	100	20...25	327	GV2 ME223	0.260
5.5	15	50	7.5	6	75				
7.5	15	50	9	6	75				
9	15	40	11	4	75				
11	15	40	15	4	75				
11	15	40	15	4	75				

Contact blocks

Description	Mounting	Maximum number	Type of contacts	Sold in lots of	Unit reference	Weight kg
Instantaneous auxiliary contacts	Front	1	N/O + N/C	10	GV AE113	0.030
			N/O + N/O	10	GV AE203	0.030
	LH side	2	N/O + N/C	1	GV AN113	0.060
			N/O + N/O	1	GV AN203	0.060

Accessory

Description	Application	Sold in lots of	Unit reference	Weight kg
Cable end reducer	For connection of conductors from 1 to 1.5 mm ²	20	LA9 D99	–

(1) For connection of conductors from 1 to 1.5 mm², the use of an LA9 D99 cable end reducer is recommended.

(2) Maximum rating which can be mounted in enclosures GV2 MC or MP, please consult your Regional Sales Office

(3) The thermal trip setting must be within the range marked on the graduated knob.

★ > 100 kA.

TeSys protection components

Thermal-magnetic motor circuit-breakers

GV2 P, GV3 P and GV3 ME80



GV2 P



GV3 P

Motor circuit-breakers from 0.06 to 30 kW / 400 V

Standard power ratings of 3-phase motors
50/60 Hz in category AC-3

400/415 V			500 V			690 V			Setting range of thermal trips	Magnetic tripping current Id ± 20 %	Reference	Weight
P	Icu	Ics	P	Icu	Ics	P	Icu	Ics				
kW	kA	% ⁽¹⁾	kW	kA	% ⁽¹⁾	kW	kA	% ⁽¹⁾	A	A	kg	
GV2 P: control by rotary knob												
Screw clamp terminals												
–	–	–	–	–	–	–	–	–	0.1...0.16	1.5	GV2 P01	0.350
0.06	★	★	–	–	–	–	–	–	0.16...0.25	2.4	GV2 P02	0.350
0.09	★	★	–	–	–	–	–	–	0.25...0.40	5	GV2 P03	0.350
0.12	★	★	–	–	–	0.37	★	★	0.40...0.63	8	GV2 P04	0.350
0.18	★	★	–	–	–	–	–	–	–	–	–	–
0.25	★	★	–	–	–	0.55	★	★	0.63...1	13	GV2 P05	0.350
0.37	★	★	0.37	★	★	–	–	–	1...1.6	22.5	GV2 P06	0.350
0.55	★	★	0.55	★	★	0.75	★	★	–	–	–	–
0.75	★	★	1.1	★	★	1.5	8	100	1.6...2.5	33.5	GV2 P07	0.350
1.1	★	★	1.5	★	★	2.2	8	100	2.5...4	51	GV2 P08	0.350
2.2	★	★	3	★	★	4	6	100	4...6.3	78	GV2 P10	0.350
3	★	★	5	50	100	5.5	6	100	6...10	138	GV2 P14	0.350
5.5	★	★	7.5	42	75	9	6	100	9...14	170	GV2 P16	0.350
–	–	–	–	–	–	11	6	100	–	–	–	–
7.5	50	50	9	10	75	15	4	100	13...18	223	GV2 P20	0.350
9	50	50	11	10	75	18.5	4	100	17...23	327	GV2 P21	0.350
11	50	50	15	10	75	–	–	–	20...25	327	GV2 P22	0.350
15	35	50	18.5	10	75	22	4	100	24...32	416	GV2 P32	0.350

GV3 P: control by rotary knob

Connection by EverLink® BTR screw connectors (3)

5.5	100	50	7.5	12	50	11	6	50	9...13	182	GV3 P13	1.000
7.5	100	50	9	12	50	15	6	50	12...18	252	GV3 P18	1.000
11	100	50	15	12	50	18.5	6	50	17...25	350	GV3 P25	1.000
15	100	50	18.5	12	50	22	6	50	23...32	448	GV3 P32	1.000
18.5	50	50	22	10	50	37	5	60	30...40	560	GV3 P40	1.000
22	50	50	30	10	50	45	5	60	37...50	700	GV3 P50	1.000
30	50	50	45	10	50	55	5	60	48...65	910	GV3 P65	1.000

Connection by lugs

To order thermal magnetic circuit-breakers with connection by lugs, add the digit **6** to the end of reference selected above. Example: **GV3 P18** becomes **GV3 P186**.

GV3 ME80: pushbutton control, screw clamp terminals

37	15	50	45	4	100	55	2	100	56...80		GV3 ME80 (4)	0.700
-----------	----	----	-----------	---	-----	-----------	---	-----	---------	--	---------------------	-------

Motor circuit-breakers up to 50 hp / 600 V, UL 508 type E

GV2 (5)

To obtain a GV2 P motor circuit-breaker, UL 508 type E, combine :

- a circuit-breaker **GV2 P●●H7** (except 32 A),
- and a "Large Spacing" adapter **GV2 GH7**.

GV3 (6)

To obtain a motor-circuit-breaker GV3 P, UL 508 type E, use the following with the circuit-breaker:

- a "Large Spacing" cover **GV3 G66**,
- a short-circuit signalling contact **GV AM11**.

GV3 with connection by lugs (6)

To obtain a motor-circuit-breaker GV3 P, UL 508 type E, with connection by lugs, add the digit **6** to the end of reference selected above and use the following with the circuit-breaker :

- two IP 20 covers **LAD 96570**,
- a short-circuit signalling contact **GV AM11**.

(1) As % of Icu.

(2) The thermal trip setting must be within the range marked on the graduated knob.

(3) BTR screws: hexagon socket head. Require use of an insulated Allen key, in compliance with local wiring regulations.

(4) Recommended for use in association with a contactor.

(5) Accessory: see page 63.

(6) Accessories: see page 57.

★ > 100 kA.

TeSys protection components

Thermal-magnetic motor circuit-breakers

GV7 R

533900



GV7 RE

533901



GV7 RS

Thermal-magnetic circuit-breakers GV7 R with screw clamp terminals

Control by rocker lever

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3									Setting range of thermal trips	Reference	Weight
400/415 V			500 V			660/690 V					
P	I _{cu}	I _{cs} (1)	P	I _{cu}	I _{cs} (1)	P	I _{cu}	I _{cs} (1)	A		kg
kW	kA	%	kW	kA	%	kW	kA	%			
7.5	36	100	9	18	100	11	8	100	12...20	GV7 RE20	2.010
9	36	100	11	18	100	15	8	100			
7.5	70	100	9	50	100	11	10	100	12...20	GV7 RS20	2.010
9	70	100	11	50	100	15	10	100			
9	36	100	11	18	100	15	8	100	15...25	GV7 RE25	2.010
11	36	100	15	18	100	18.5	8	100			
9	70	100	11	50	100	15	10	100	15...25	GV7 RS25	2.010
11	70	100	15	50	100	18.5	10	100			
18.5	36	100	18.5	18	100	22	8	100	25...40	GV7 RE40	2.010
			22	18	100						
18.5	70	100	18.5	50	100	22	10	100	25...40	GV7 RS40	2.010
22	36	100	30	18	100	30	8	100	30...50	GV7 RE50	2.015
22	70	100	30	50	100	30	10	100	30...50	GV7 RS50	2.015
37	36	100	45	18	100	55	8	100	48...80	GV7 RE80	2.040
			55	18	100						
37	70	100	45	50	100	55	10	100	48...80	GV7 RS80	2.040
			55	50	100						
45	36	100	–	18	100	75	8	100	60...100	GV7 RE100	2.040
45	70	100	–	50	100	75	10	100	60...100	GV7 RS100	2.040
55	35	100	75	30	100	90	8	100	90...150	GV7 RE150	2.020
75	35	100	90	30	100	110	8	100			
55	70	100	75	50	100	90	10	100	90...150	GV7 RS150	2.020
75	70	100	90	50	100	110	10	100			
90	35	100	110	30	100	160	8	100	132...220	GV7 RE220	2.350
110	35	100	132	30	100	200	8	100			
			160	30	100						
90	70	100	110	50	100	160	10	100	132...220	GV7 RS220	2.350
110	70	100	132	50	100	200	10	100			
			160	50	100						

(1) As % of I_{cu}.

TeSys protection components

Thermal-magnetic circuit-breakers

GV2 RT

510570



GV2 RT

For motors with high current peak on starting

Control by rocker lever

Standard power ratings of 3-phase motors 50-60 Hz in category AC-3					Setting range of thermal trips (1)	Magnetic tripping current I _d ± 20 %	Reference	Weight
220/ 230 V	400/ 415 V	440 V	500 V	690 V				
kW	kW	kW	kW	kW	A	A		kg
0.06	0.09	0.09 0.12	–	–	0.25...0.40	8	GV2 RT03	0.350
–	0.12 0.18	0.18	–	0.37	0.40...0.63	13	GV2 RT04	0.350
0.09 0.12	0.25 0.37	0.25 0.37	0.37	0.55	0.63...1	22	GV2 RT05	0.350
0.18 0.25	0.37 0.55	0.37 0.55	0.37 0.55 0.75	0.75 1.1	1...1.6	33	GV2 RT06	0.350
0.37	0.75	0.75 1.1	1.1	1.5	1.6...2.5	51	GV2 RT07	0.350
0.55 0.75	1.1 1.5	1.5	1.5 2.2	2.2 3	2.5...4	78	GV2 RT08	0.350
1.1	2.2	2.2 3	3	4	4...6.3	138	GV2 RT10	0.350
1.5 2.2	3 4	4	4 5.5	5.5 7.5	6...10	200	GV2 RT14	0.350
2.2 3	5.5	5.5 7.5	7.5	9 11	9...14	280	GV2 RT16	0.350
4	7.5	7.5 9	9	15	13...18	400	GV2 RT20	0.350
5.5	9 11	11	11	18.5	17...23	400	GV2 RT21	0.350

(1) The thermal trip setting must be within the range marked on the graduated knob.

TeSys protection components

Thermal-magnetic circuit-breakers

GV2 RT

510570



GV2 RT

For primaries of 3-phase transformers

Control by rocker lever

Standard power ratings					Setting range of thermal trips (1)	Magnetic tripping current $I_d \pm 20\%$	Reference	Weight
230/240 V	400/415 V	440 V	500 V	690 V				
kW	kW	kW	kW	kW	A	A		kg
–	–	–	–	–	0.25...0.40	8	GV2 RT03	0.350
–	–	–	–	–	0.40...0.63	13	GV2 RT04	0.350
–	–	0.63	0.63	1	0.63...1	22	GV2 RT05	0.350
0.4	0.63	1	1	–	1...1.6	33	GV2 RT06	0.350
0.63	1	–	1.6	1.6 2	1.6...2.5	51	GV2 RT07	0.350
1	1.6 2	1.6 2	2 2.5	2.5	2.5...4	78	GV2 RT08	0.350
1.6 2	2.5	2.5 4	4	4 5 6.3	4...6.3	138	GV2 RT10	0.350
2.5	4 5	5	5 6.3	–	6...10	200	GV2 RT14	0.350
4	6.3	6.3	–	10 12.5	9...14	280	GV2 RT16	0.350
5 6.3	10	10	10 12.5	10	13...18	400	GV2 RT20	0.350

Accessory (2)

Description	Reference	Weight kg
Padlockable external operator (IP 54) black handle, blue legend plate	GV2 AP03	0.280

(1) The thermal trip setting must be within the range marked on the graduated knob.

(2) Other accessories such as mounting, cabling and marking accessories are identical to those used for GV2 ME motor circuit-breakers, see page 63.

TeSys protection components

Magnetic motor circuit-breakers

GV2 LE

534101



GV2 LE

Magnetic motor circuit-breakers from 0.06 to 15 kW

GV2 L: control by rocker lever, connection by screw clamp terminals

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3									Magnetic protection rating	Tripping current I _d ± 20 %	Use in association with thermal overload relay	Reference	Weight
400/415 V			500 V			690 V							
P	I _{cu}	I _{cs} (1)	P	I _{cu}	I _{cs} (1)	P	I _{cu}	I _{cs} (1)					
kW	kA		kW	kA		kW	kA		A	A			kg
0.06	★	★	-	-	-	-	-	-	0.4	5	LR2 K0302	GV2 LE03	0.330
0.09	★	★	-	-	-	-	-	-	0.4	5	LR2 K0304	GV2 LE03	0.330
0.12	★	★	-	-	-	0.37	★	★	0.63	8	LR2 K0304	GV2 LE04	0.330
0.18	★	★	-	-	-	-	-	-	0.63	8	LR2 K0305	GV2 LE04	0.330
-	-	-	-	-	-	0.55	★	★	1	13	LR2 K0305	GV2 LE05	0.330
0.25	★	★	-	-	-	-	-	-	1	13	LR2 K0306	GV2 LE05	0.330
-	-	-	-	-	-	0.75	★	★	1	13	LR2 K0306	GV2 LE05	0.330
0.37	★	★	0.37	★	★	-	-	-	1	13	LR2 K0306	GV2 LE05	0.330
0.55	★	★	0.55	★	★	1.1	★	★	1.6	22.5	LR2 K0307	GV2 LE06	0.330
-	-	-	0.75	★	★	-	-	-	1.6	22.5	LR2 K0307	GV2 LE06	0.330
0.75	★	★	1.1	★	★	1.5	3	75	2.5	33.5	LR2 K0308	GV2 LE07	0.330
1.1	★	★	-	-	-	-	-	-	2.5	33.5	LR2 K0308	GV2 LE07	0.330
1.5	★	★	1.5	★	★	3	3	75	4	51	LR2 K0310	GV2 LE08	0.330
-	-	-	2.2	★	★	-	-	-	4	51	LR2 K0312	GV2 LE08	0.330
2.2	★	★	3	50	100	4	3	75	6.3	78	LR2 K0312	GV2 LE10	0.330
3	★	★	4	10	100	5.5	3	75	10	138	LR2 K0314	GV2 LE14	0.330
4	★	★	5.5	10	100	-	-	-	10	138	LR2 K0316	GV2 LE14	0.330
-	-	-	-	-	-	7.5	3	75	10	138	LRD 14	GV2 LE14	0.330
-	-	-	-	-	-	9	3	75	14	170	LRD 16	GV2 LE16	0.330
5.5	15	50	7.5	6	75	11	3	75	14	170	LR2 K0321	GV2 LE16	0.330
7.5	15	50	9	6	75	15	3	75	18	223	LRD 21	GV2 LE20	0.330
9	15	40	11	4	75	18.5	3	75	25	327	LRD 22	GV2 LE22	0.330
11	15	40	15	4	75	-	-	-	25	327	LRD 22	GV2 LE22	0.330
15	10	50	18.5	4	75	22	3	75	32	416	LRD 32	GV2 LE32	0.330

(1) As % of I_{cu}.

★ > 100 kA.

TeSys protection components

Magnetic motor circuit-breakers

GV2 L, GV3 L and GK3 EF80

534102



GV2 L ●●

510531



GV3 L●●

534103



GK3 EF80

Motor circuit-breakers from 0.09 to 30 kW

GV2 L: Control by rotary knob, connection by screw clamp terminals

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3									Magnetic protection rating	Tripping current I _d ± 20 %	Use in association with thermal overload relay	Reference	Weight
400/415 V			500 V			690 V							
P	I _{cu}	I _{cs} (1)	P	I _{cu}	I _{cs} (1)	P	I _{cu}	I _{cs} (1)					
kW	kA		kW	kA		kW	kA		A	A			kg
0.09	★	★	-	-	-	-	-	-	0.4	5	LRD 03	GV2 L03	0.330
0.12	★	★	-	-	-	0.37	★	★	0.63	8	LRD 04	GV2 L04	0.330
0.18	★	★	-	-	-	-	-	-	0.63	8	LRD 04	GV2 L04	0.330
-	-	-	-	-	-	0.55	★	★	1	13	LRD 05	GV2 L05	0.330
0.25	★	★	-	-	-	-	-	-	1	13	LRD 05	GV2 L05	0.330
-	-	-	-	-	-	0.75	★	★	1	13	LRD 06	GV2 L05	0.330
0.37	★	★	0.37	★	★	-	-	-	1	13	LRD 05	GV2 L05	0.330
0.55	★	★	0.55	★	★	1.1	★	★	1.6	22.5	LRD 06	GV2 L06	0.330
-	-	-	0.75	★	★	-	-	-	1.6	22.5	LRD 06	GV2 L06	0.330
0.75	★	★	1.1	★	★	1.5	4	100	2.5	33.5	LRD 07	GV2 L07	0.330
1.1	-	-	-	-	-	-	-	-	-	-	LRD 08	GV2 L08	0.330
1.5	★	★	1.5	★	★	3	4	100	4	51	LRD 08	GV2 L08	0.330
-	-	-	-	-	-	-	-	-	-	-	LRD 08	GV2 L08	0.330
2.2	★	★	3	★	★	4	4	100	6.3	78	LRD 10	GV2 L10	0.330
3	★	★	4	10	100	5.5	4	100	10	138	LRD 12	GV2 L14	0.330
4	-	-	-	-	-	-	-	-	-	-	LRD 14	GV2 L14	0.330
-	-	-	-	-	-	7.5	4	100	10	138	LRD 14	GV2 L14	0.330
-	-	-	-	-	-	9	4	100	14	170	LRD 16	GV2 L16	0.330
5.5	50	50	7.5	10	75	11	4	100	14	170	LRD 16	GV2 L16	0.330
7.5	50	50	9	10	75	15	4	100	18	223	LRD 21	GV2 L20	0.330
9	50	50	11	10	75	18.5	4	100	25	327	LRD 22	GV2 L22	0.330
11	50	50	15	10	75	-	-	-	25	327	LRD 22	GV2 L22	0.330
15	35	50	18.5	10	75	22	4	100	32	416	LRD 32	GV2 L32	0.330

GV3 L: control by rotary knob, connection by EverLink® BTR screw connector

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3									Magnetic protection rating	Tripping current I _d ± 20 %	Use in association with thermal overload relay (class 10 A)	Reference	Weight
400/415 V			500 V			690 V							
P	I _{cu}	I _{cs} (1)	P	I _{cu}	I _{cs} (1)	P	I _{cu}	I _{cs} (1)					
kW	kA		kW	kA		kW	kA		A	A			kg
11	100	50	15	12	50	18,5	6	50	25	350	LRD 22	GV3 L25	1.000
15	100	50	18.5	12	50	22	6	50	32	448	LRD 32	GV3 L32	1.000
18,5	50	50	22	10	50	37	5	60	40	560	LRD 3355	GV3 L40	1.000
22	50	50	30	10	50	45	5	60	50	700	LRD 3357	GV3 L50	1.000
30	50	50	37	10	50	55	5	60	65	910	LRD 3359	GV3 L65	1.000


Connection by lugs

To order these circuit-breakers with connection by lugs, add the digit **6** to the end of reference selected above.
Example: **GV3 L32** becomes **GV3 L326**.

GK3: control by rotary knob, connection by screw clamp terminals

37	35	25	55	15	30	-	-	-	80	1040	LRD3363	GK3 EF80	0,795
----	----	----	----	----	----	---	---	---	----	------	---------	----------	-------

(1) As % of I_{cu}. Associated current limiter or fuses, where required. See characteristics page 17.
★ > 100 kA.

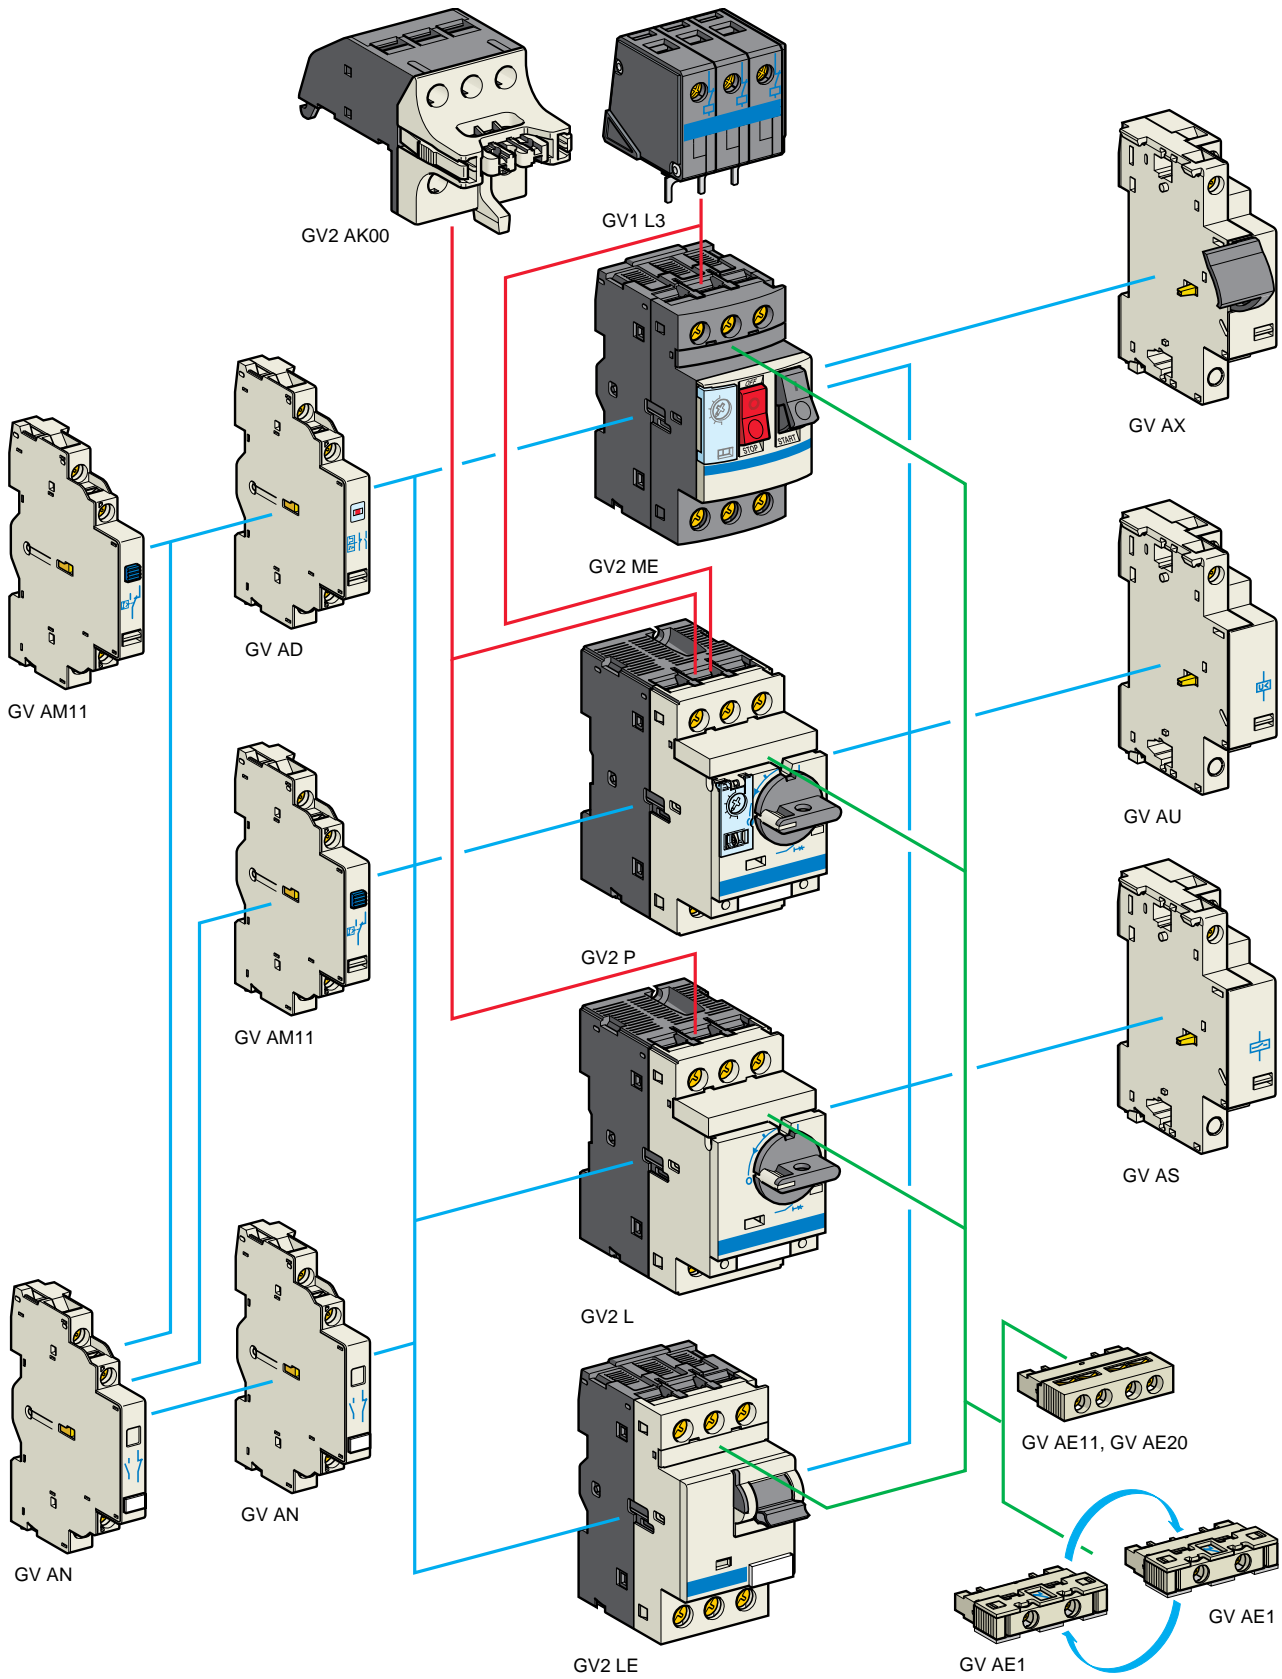

TeSys protection components

Thermal-magnetic and magnetic motor circuit-breakers GV2 with screw clamp connections

Add-on blocks and accessories

Contact blocks

Description	Mounting	Maximum number	Type of contacts	Sold in lots of	Unit reference	Weight kg
Instantaneous auxiliary contacts	Front (1)	1	N/O or N/C (2)	10	GV AE1	0.015
			N/O + N/C	10	GV AE11	0.020
			N/O + N/O	10	GV AE20	0.020
	Side (LH)	2	N/O + N/C	1	GV AN11	0.050
			N/O + N/O	1	GV AN20	0.050
			N/O (fault) + N/O	1	GV AD1010	0.055
Fault signalling contact + instantaneous auxiliary contact	Side (LH) (3)	1	N/O (fault) + N/C	1	GV AD1001	0.055
				1	GV AD0110	0.055
			N/C (fault) + N/C	1	GV AD0101	0.055
				1	GV AD0101	0.055
Short-circuit signalling contact	Side (LH)	1	C/O common point	1	GV AM11	0.045

Electric trips

Mounting	Voltage		Reference	Weight kg
Undervoltage or shunt trips (4)				
Side (1 block on RH side of circuit-breaker)	24 V	50 Hz	GV A●025	0.105
		60 Hz	GV A●026	0.105
	48 V	50 Hz	GV A●055	0.105
		60 Hz	GV A●056	0.105
	100 V	50 Hz	GV A●107	0.105
	100...110 V	60 Hz	GV A●107	0.105
	110...115 V	50 Hz	GV A●115	0.105
		60 Hz	GV A●116	0.105
	120...127 V	50 Hz	GV A●125	0.105
	127 V	60 Hz	GV A●115	0.105
	200 V	50 Hz	GV A●207	0.105
	200...220 V	60 Hz	GV A●207	0.105
		50 Hz	GV A●225	0.105
	220...240 V	60 Hz	GV A●226	0.105
		50 Hz	GV A●385	0.105
	380...400 V	60 Hz	GV A●386	0.105
		50 Hz	GV A●415	0.105
	415...440 V	60 Hz	GV A●416	0.105
	440 V	60 Hz	GV A●385	0.105
	480 V	60 Hz	GV A●415	0.105
500 V	50 Hz	GV A●505	0.105	
600 V	60 Hz	GV A●505	0.105	

Undervoltage trip, INRS (can only be mounted on GV2 ME)

Safety device for dangerous machines conforming to INRS and VDE 0113.

Side (1 block on RH side of circuit-breaker GV2 ME)	110...115 V	50 Hz	GV AX115	0.110
		60 Hz	GV AX116	0.110
	127 V	60 Hz	GV AX115	0.110
		50 Hz	GV AX225	0.110
	220...240 V	60 Hz	GV AX226	0.110
		50 Hz	GV AX385	0.110
	380...400 V	60 Hz	GV AX386	0.110
		50 Hz	GV AX415	0.110
	415...440 V	60 Hz	GV AX385	0.110

Add-on contact blocks

Description	Mounting	Maximum number	Reference	Weight kg
Visible isolation block (5)	Front (1)	1	GV2 AK00	0.150
Limiters	At top (GV2 ME and GV2 P)	1	GV1 L3	0.130
	Independent	1	LA9 LB920	0.320

(1) Mounting of a GV AE contact block or a GV2 AK00 visible isolation block on GV2 P and GV2 L

(2) Choice of N/C or N/O contact operation, depending on which way round the reversible block is mounted.


(3) The GV AD is always mounted next to the circuit-breaker.

(4) To order an undervoltage trip: replace the dot (●) in the reference with a U, example: GV AU025.


To order a shunt trip: replace the dot (●) in the reference with an S, example: GV AS025.

(5) Visible isolation of the 3 poles upstream of circuit-breaker GV2 P and GV2 L.

Visible isolation block GV2 AK00 cannot be used with motor circuit-breakers GV2 P32 and GV2 L32 (Ith max = 25 A).



LA9 LB920

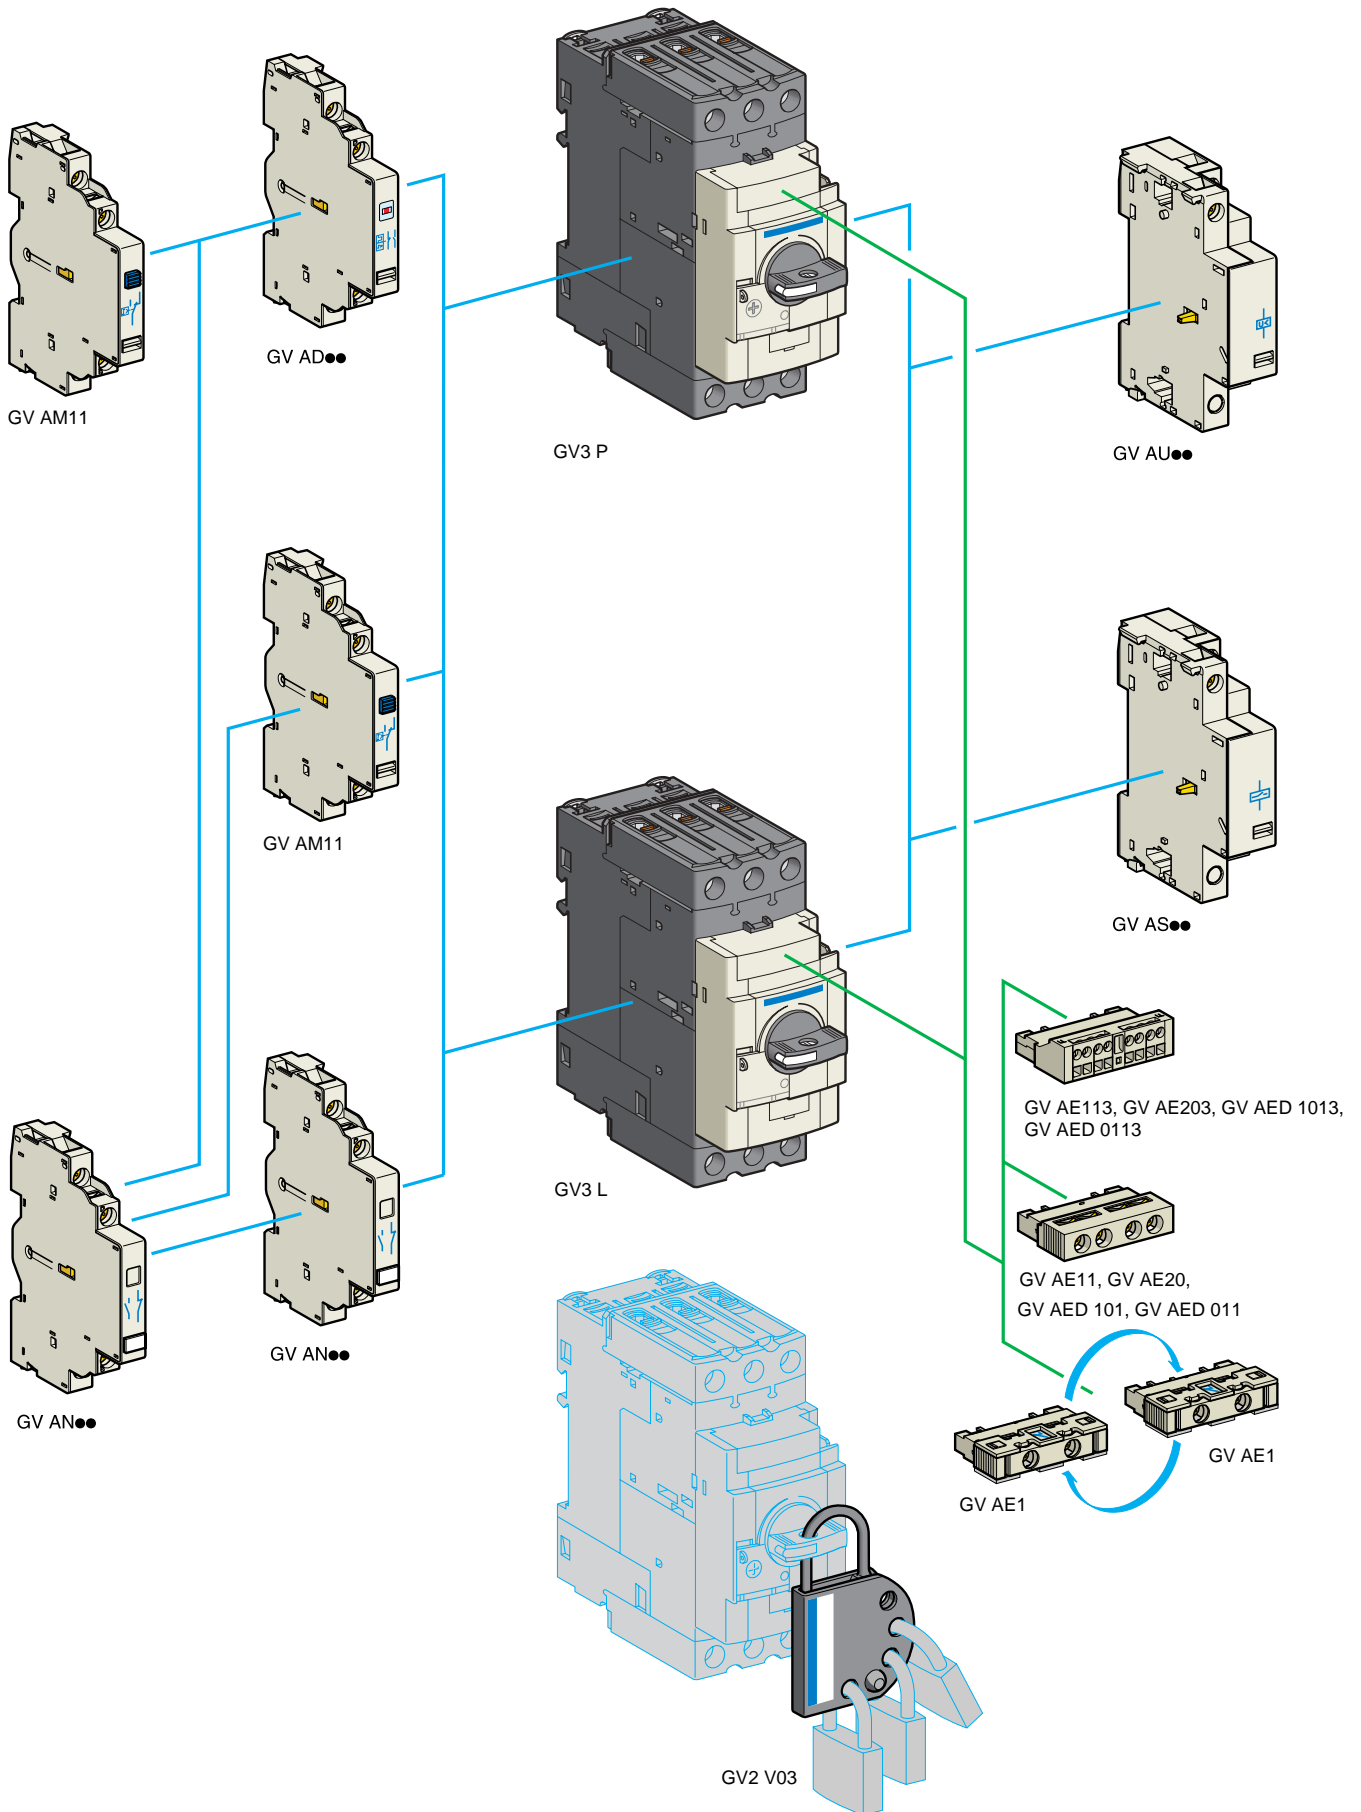

Contact blocks

Description	Mounting	Maximum number	Type of contacts	Sold in lots of	Unit reference	Weight kg
Instantaneous auxiliary contacts	Front	1	N/O or N/C (1)	10	GV AE1	0.015
			N/O + N/C	10	GV AE11 (2)	0.020
			N/O + N/O	10	GV AE20 (2)	0.020
	Side (LH)	2	N/O + N/C	1	GV AN11 (2)	0.050
			N/O + N/O	1	GV AN20 (2)	0.050
Fault signalling contact + instantaneous auxiliary contact	Front	1	N/O (fault) + N/O	1	GV AED101 (2)	0.020
			N/O (fault) + N/C	1	GV AED011 (2)	0.020
	Side (3) (LH)	1	N/O (fault) + N/O	1	GV AD1010	0.055
			+ N/C	1	GV AD1001	0.055
			N/C (fault) + N/O	1	GV AD0110	0.055
			+ N/C	1	GV AD0101	0.055
Short-circuit signalling contact	Side (LH)	1	C/O common point	1	GV AM11	0.045

Electric trips

Mounting	Voltage	Reference	Weight kg	
Undervoltage or shunt trips (4)				
Side (1 block on RH side of circuit-breaker)	24 V	50 Hz	GV A●025	0.105
		60 Hz	GV A●026	0.105
	48 V	50 Hz	GV A●055	0.105
		60 Hz	GV A●056	0.105
	100	50 Hz	GV A●107	0.105
	100...110 V	60 Hz	GV A●107	0.105
	110...115 V	50 Hz	GV A●115	0.105
		60 Hz	GV A●116	0.105
	120...127 V	50 Hz	GV A●125	0.105
	127 V	60 Hz	GV A●115	0.105
	200 V	50 Hz	GV A●207	0.105
	200...220 V	60 Hz	GV A●207	0.105
	220...240 V	50 Hz	GV A●225	0.105
		60 Hz	GV A●226	0.105
	380...400 V	50 Hz	GV A●385	0.105
		60 Hz	GV A●386	0.105
	415...440 V	50 Hz	GV A●415	0.105
	415 V	60 Hz	GV A●416	0.105
	440 V	60 Hz	GV A●385	0.105
	480 V	60 Hz	GV A●415	0.105
500 V	50 Hz	GV A●505	0.105	
600 V	60 Hz	GV A●505	0.105	

Accessories

Description	For circuit-breakers	Reference	Weight kg
Set of 3-pole 115 A busbars 3 tap-offs. Pitch: 64 mm	GV3 P●● and GV3 L●●	GV3 G364	0.25
Cover "Large Spacing" UL 508 type E (Only one cover required on supply side)	GV3 P●●	GV3 G66	0.020
IP 20 cover (Two covers required per breaker)	GV3 P●●6 and GV3 L●●6	LAD 96570	0.021
Padlocking device for use with up to 4 padlocks (not supplied) Ø 6 mm shank max.	GV3 P●● and GV3 L●● GV3 P●●6 and GV3 L●●6	GV2 V03	0.092


(1) Choice of N/C or N/O contact operation, depending on which way round the reversible block is mounted.

(2) Contact blocks available in version with spring terminal connections. Add a figure 3 at the end of the references selected above.
Example: **GV AED101** becomes **GV AED1013**.


(3) The **GV AD** is always mounted next to the circuit-breaker.

(4) To order an undervoltage trip: replace the dot (●) in the reference with a **U**, example: **GV AU025**.


To order a shunt trip: replace the dot (●) in the reference with an **S**, example: **GV AS025**.



GV3 G66




LAD 96570

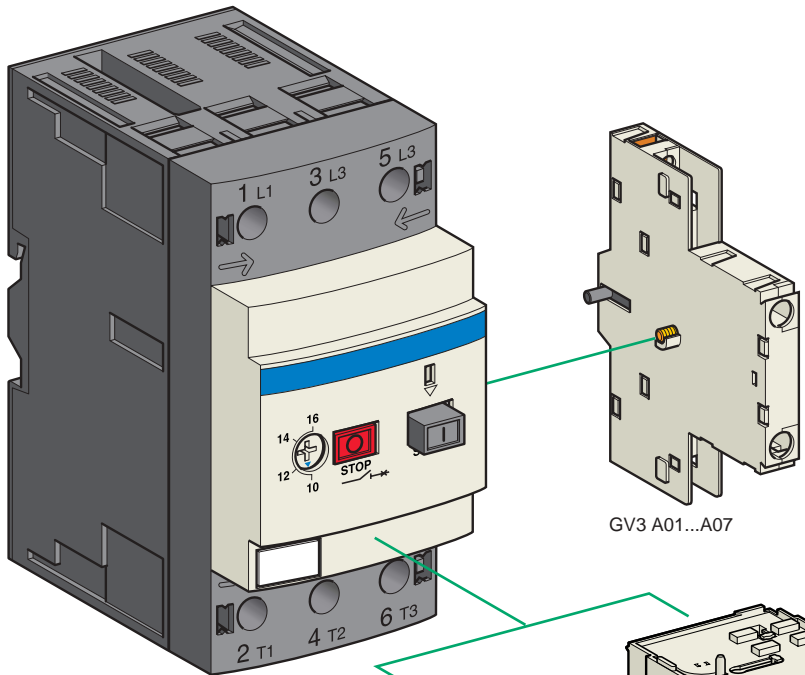


GV3 A01...A07

GV3 ME●●

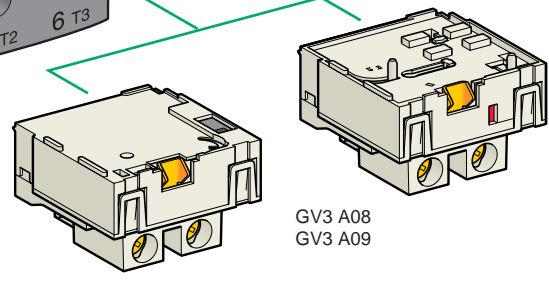

GV3 B●●
GV3 D●●

GV3 A08
GV3 A09

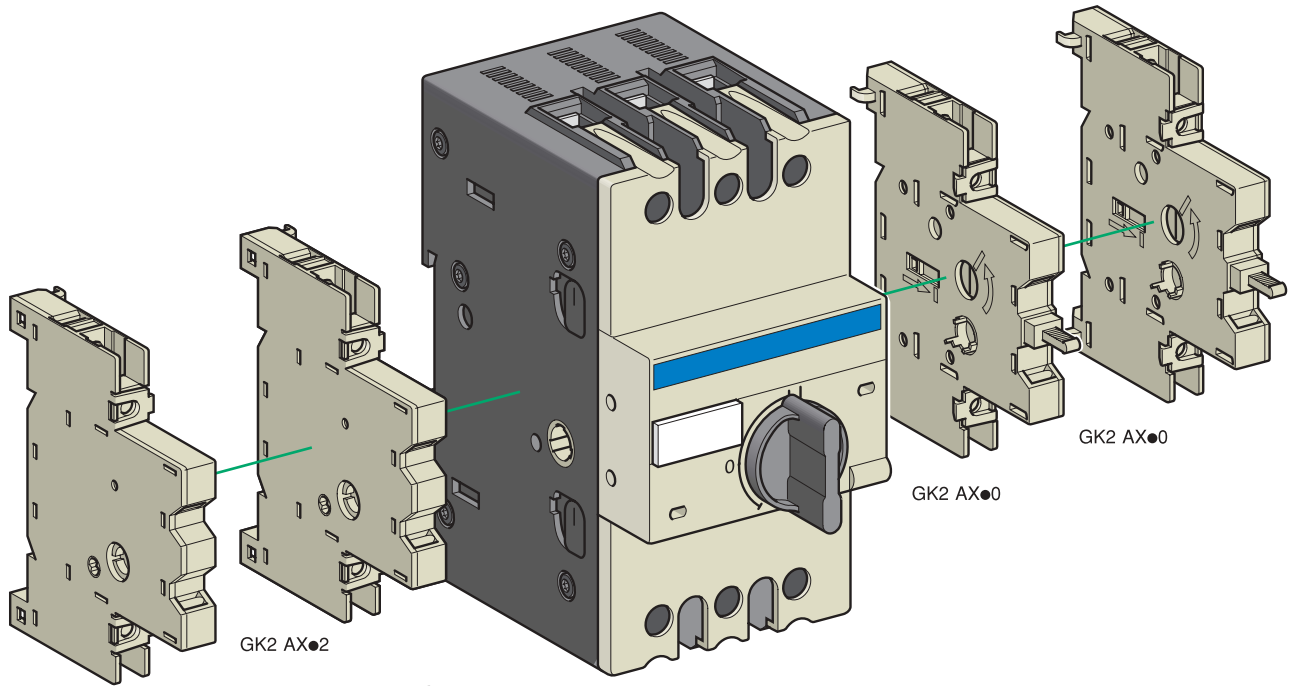

GK2 AX●2

GK2 AX●2

GK3 EF●●

GK2 AX●0

GK2 AX●0

TeSys protection components

Motor circuit-breakers GV3 ME80 and

GK3 EF80

Add-on blocks and accessories

For thermal-magnetic motor circuit-breakers GV3 ME80

Contact blocks

Description	Type of standard early break contacts	Reference	Weight kg
Instantaneous auxiliary contact blocks (1 per circuit-breaker)	N/C + N/O	GV3 A01	0,060
	N/O + N/O	GV3 A02	0.060
	N/C + N/O + N/O	GV3 A03	0.070
	N/O + N/O + N/O	GV3 A05	0.070
	N/O + N/O + 2 volt-free terminals	GV3 A06	0.070
	N/C + N/O + 2 volt-free terminals	GV3 A07	0.070
Fault signalling contacts (1)	N/C	GV3 A08	0.030
	N/O	GV3 A09	0.030

Electric trips

Description	Voltages		Reference	Weight kg
	50 Hz	60 Hz		
Undervoltage trips (1)	110, 120, 127 V	120, 127 V	GV3 B11	0.070
	220, 240 V	277 V	GV3 B22	0.070
	380, 415 V	440 V, 480 V	GV3 B38	0.070
Shunt trips (1)	110, 120, 127 V	120, 127 V	GV3 D11	0.070
	220, 240 V	277 V	GV3 D22	0.070
	380, 415 V	440 V, 480 V	GV3 D38	0.070

Accessory

Description	Sold in lots of	Unit reference	Weight kg
Padlocking device, for locking the Start button (on open-mounted product)	5	GV1 V02	0.010

For magnetic circuit-breaker GK3 EF80

Contact blocks

Description	Number of poles	Reference	Weight kg
Auxiliary contact blocks for On-Off signalling and "control circuit test" function (1 or 2 blocks per device) mounted on RH side of GK3 EF80	N/O	GK2 AX10	0.025
	N/O + N/O	GK2 AX20	0.031
	N/C + N/O	GK2 AX50	0.031
Instantaneous fault signalling contact blocks (1 or 2 blocks per device) mounted on LH side of GK3 EF80	N/O	GK2 AX12	0.025
	N/O + N/O	GK2 AX22	0.031
	N/C + N/O	GK2 AX52	0.031


Accessories

Description	Reference	Weight kg
Padlocking device for padlocking the operator, using up to 3 padlocks (padlocks to be ordered separately)	GK3 AV01	0.020
External operator for mounting on enclosure door. Red Ø 40 knob on yellow plate, padlockable in position O (with up to 3 padlocks). Door locked when knob in position I, and when knob padlocked in position O.	GK3 AP03	0.300

(1) 1 voltage trip **OR** 1 fault signalling contact to be fitted inside the motor circuit-breaker.

Other versions

24 to 690 V, 50 or 60 Hz voltage trips for circuit-breakers **GV3 ME80**. Please consult your Regional Sales Office.

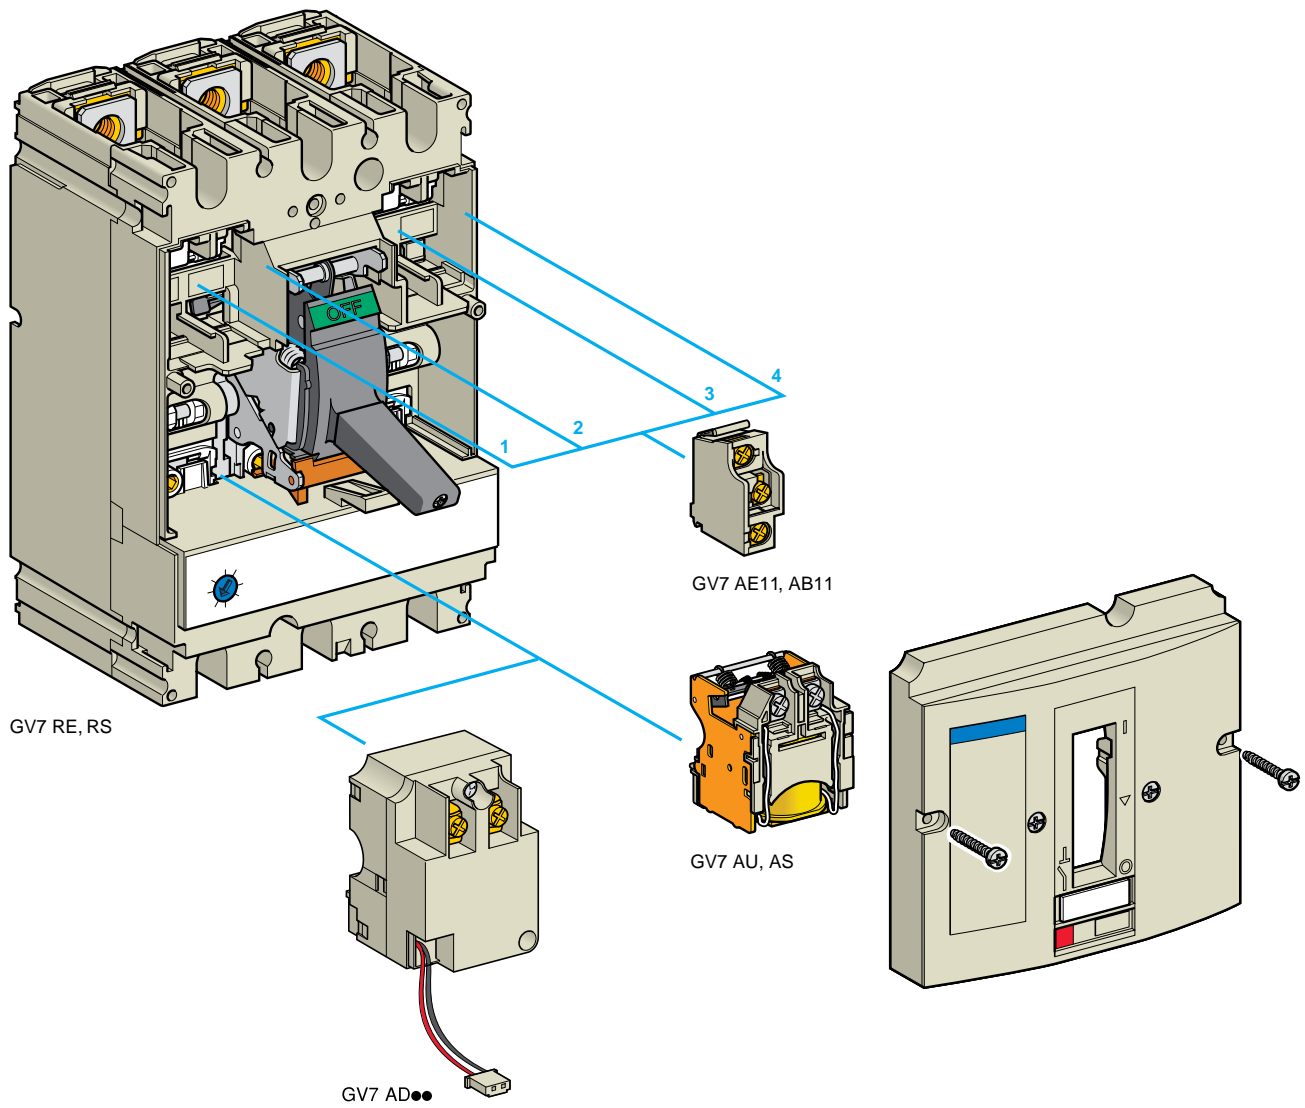

TeSys protection components

Thermal-magnetic motor circuit-breakers

GV7 R with screw clamp connections

Add-on blocks and accessories

Add-on auxiliary contacts

These allow remote indication of the circuit-breaker contact states. They can be used for signalling, electrical locking, relaying, etc. They are available in two versions: standard and low level. They include a terminal block and the auxiliary circuits leave the circuit-breaker through a hole provided for this purpose.

They perform the following functions, depending on where they are located in the circuit-breaker:

Location	Function	Application
1 and/or 4	C/O contact	Indicates the position of the circuit-breaker poles
2	Trip indication	Indicates that the circuit-breaker has tripped due to an overload, a short-circuit, a differential fault or the operation of a voltage trip (undervoltage or shunt trip), or of the "push to trip" test button. It resets when the circuit-breaker is reset.
3	Electrical fault indication	Indicates that the circuit-breaker has tripped due to an overload, a short-circuit or a differential fault. It resets when the circuit-breaker is reset.

Type	Reference	Weight kg
Standard	GV7 AE11	0.015
Low level	GV7 AB11	0.015

Fault discrimination devices

These make it possible to:

- either differentiate a thermal fault from a magnetic fault,
- or open the contactor only in the event of a thermal fault.

Voltage	Reference	Weight kg
\sim 24...48 and \equiv 24...72 V	GV7 AD111 (1)	0.100
\approx 110...240 V	GV7 AD112 (1)	0.100


Electric trips

These allow the circuit-breaker to be tripped via an electrical control signal.

- Undervoltage trip GV7 AU
 - Trips the circuit-breaker when the control voltage drops below the tripping threshold, which is between 0.35 and 0.7 times the rated voltage.
 - Circuit-breaker closing is only possible if the voltage exceeds 0.85 times the rated voltage.
- Shunt trip GV7 AS
 - Trips the circuit-breaker when the control voltage rises above 0.7 times the rated voltage.
- Operation (GV7 AU or GV7 AS)
 - When the circuit-breaker has been tripped by a GV7 AU or AS, it must be reset either locally or by remote control. (For remote control, please consult your Regional Sales Office).
 - Tripping has priority over manual closing: if a tripping instruction is present, manual action does not result in closing, even temporarily, of the contacts.
 - Durability: 50 % of the mechanical durability of the circuit-breaker.

Type	Voltage	Reference	Weight kg
Undervoltage trip	48 V, 50/60 Hz	GV7 AU055 (1)	0.105
	110...130 V, 50/60 Hz	GV7 AU107 (1)	0.110
	200...240 V, 50/60 Hz	GV7 AU207 (1)	0.110
	380...440 V, 50/60 Hz	GV7 AU387 (1)	0.105
	525 V, 50 Hz	GV7 AU525 (1)	0.100
Shunt trip	48 V, 50/60 Hz	GV7 AS055 (1)	0.105
	110...130 V, 50/60 Hz	GV7 AS107 (1)	0.110
	200...240 V, 50/60 Hz	GV7 AS207 (1)	0.110
	380...440 V, 50/60 Hz	GV7 AS387 (1)	0.105
	525 V, 50 Hz	GV7 AS525 (1)	0.100

(1) For mounting of a GV7 AD or a GV7 AU or AS.

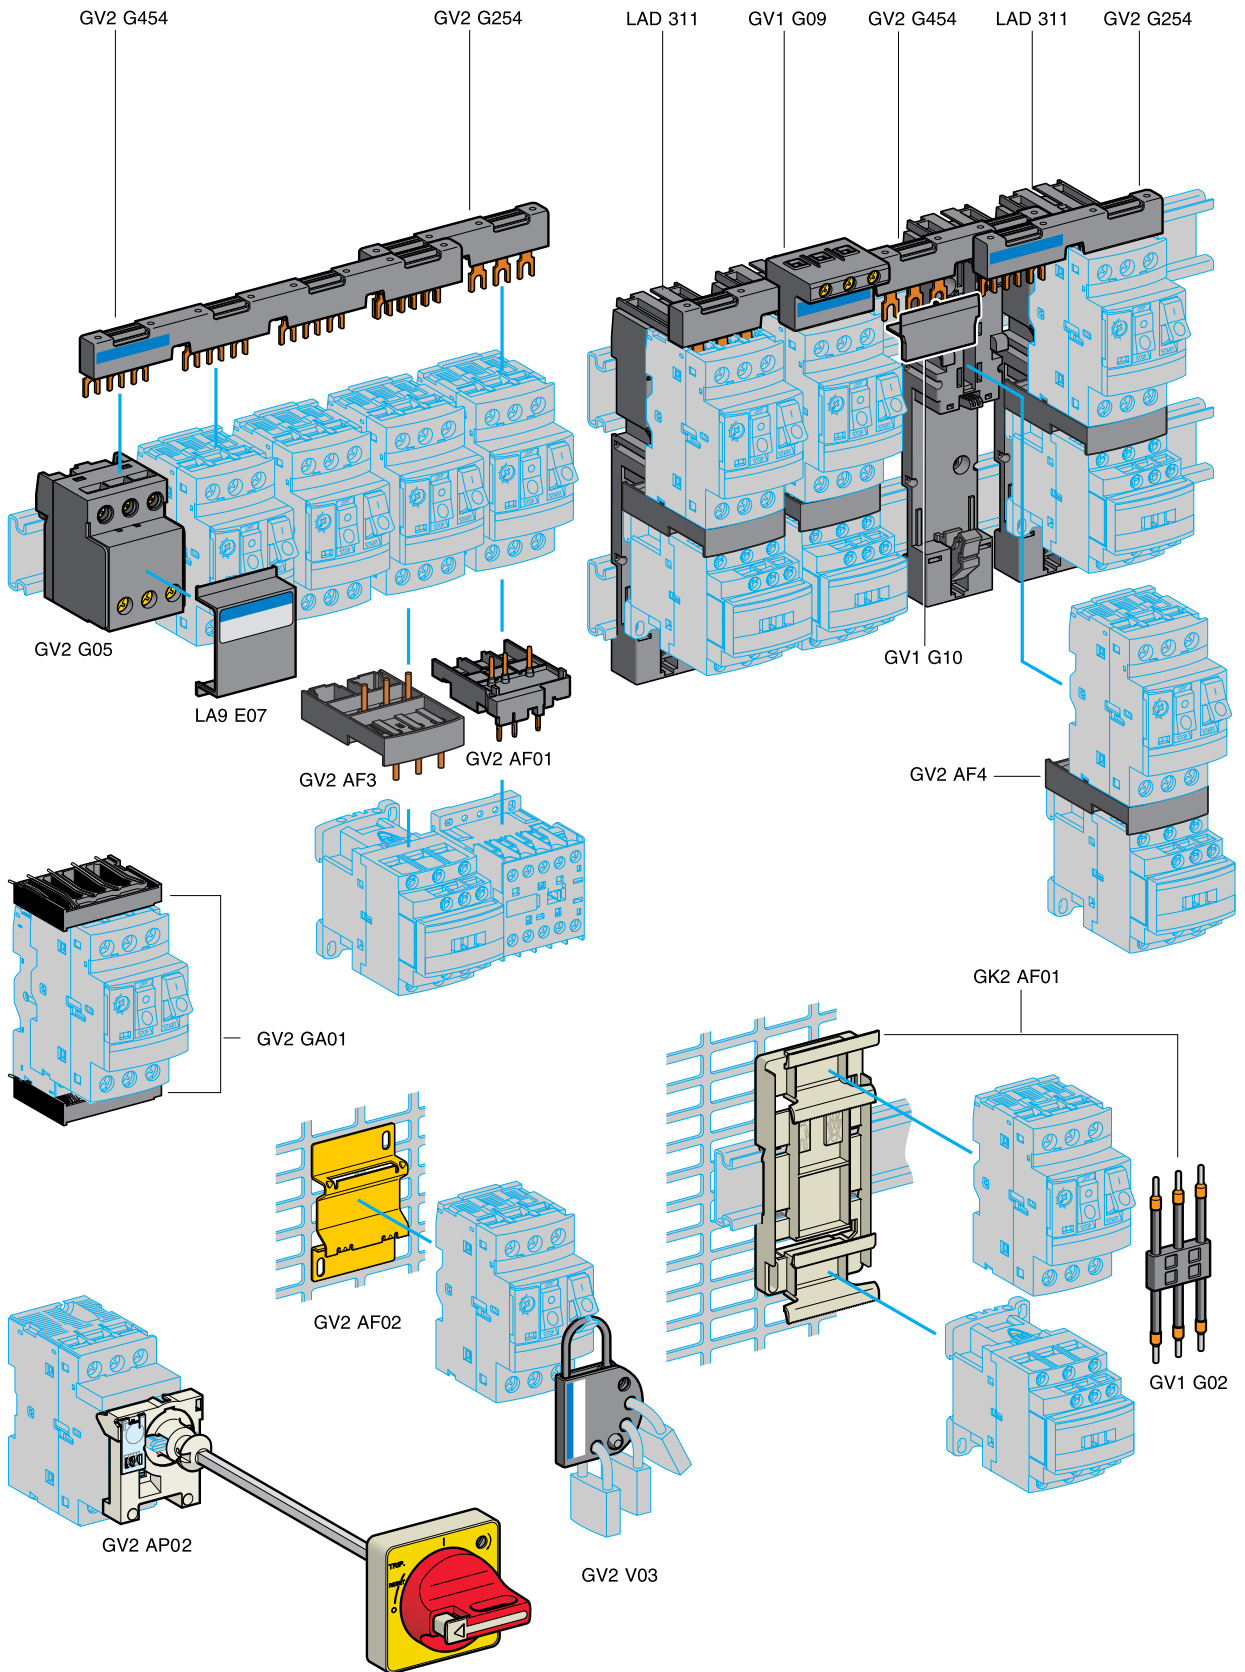

TeSys protection components

Thermal-magnetic and magnetic motor circuit-breakers GV2 with screw clamp connections

Accessories



Accessories				
Description	Application	Sold in lots of	Unit reference	Weight kg
Adapter plates	For mounting a GV2 ME or GV2 LE by screw fixing	10	GV2 AF02	0.021
	For mounting a GV2 ME or GV2 P and contactor LC1 D09...D38 with front faces aligned	1	LAD 311	0.040
Height compensation plate	7,5 mm	10	GV1 F03	0.003
Combination blocks	Between GV2 and contactor LC1 K or LP1 K	10	GV2 AF01	0.020
	Between GV2 and contactor LC1 D09...D38	10	GV2 AF3	0.016
	Between GV2 mounted on LAD 311 and contactor LC1 D09...D38	10	GV2 AF4	0.016
Motor starter adapter plate	With 3-pole connection for mounting a GV2 and a contactor LC1 D09...D25	1	GK2 AF01	0.120

Description	Application	Pitch mm	Reference	Weight kg
Sets of 3-pole 63 A busbars	2 tap-offs	45	GV2 G245	0.036
		54	GV2 G254	0.038
		72	GV2 G272	0.042
	3 tap-offs	45	GV2 G345	0.058
		54	GV2 G354	0.060
	4 tap-offs	45	GV2 G445	0.077
		54	GV2 G454	0.085
		72	GV2 G472	0.094
	5 tap-offs	54	GV2 G554	0.100

Description	Application	Sold in lots of	Unit reference	Weight kg
Protective end cover	For unused busbar outlets	5	GV1 G10	0.005
Terminal block for supply to one or more GV2 G busbar sets	Connection from the top	1	GV1 G09	0.040
	Can be fitted with current limiter GV1 L3 (GV2 ME and GV2 P)	1	GV2 G05	0.115
Cover for terminal block	For mounting in modular panels	10	LA9 E07	0.005
Flexible 3-pole connection for connecting a GV2 to a contactor LC1-D09...D25	Centre distance between mounting rails: 100...120 mm	10	GV1 G02	0.013
Set of connections upstream/downstream	For connecting GV2 ME to a printed circuit board	10	GV2 GA01	0.045
"Large Spacing" adapter UL 508 type E	For GV2 P●●H7 (except 32 A)	1	GV2 GH7	0.040
Clip-in marker holders (supplied with each circuit-breaker)	For GV2 P, GV2 L, GV2 LE and GV2 RT (8 x 22 mm)	100	LA9 D92	0.001

Padlockable external operators			
Description	Reference	Weight kg	
For GV2 P and GV2 L (150 to 290 mm)	Padlocking in "On" and "Off" position Black handle, blue legend plate, IP 54	GV2 AP01	0.200
	Padlocking in "Off" position Red handle, yellow legend plate, IP 54	GV2 AP02	0.200
For GV2 LE	Padlocking in "On" and "Off" position Black handle, blue legend plate, IP 54	GV2 AP03	0.280

Padlocking device			
Description	Reference	Weight kg	
For all GV2 device	For use with up to 4 padlocks, Ø 6 mm shank max. (padlocks not included)	GV2 V03	0.092

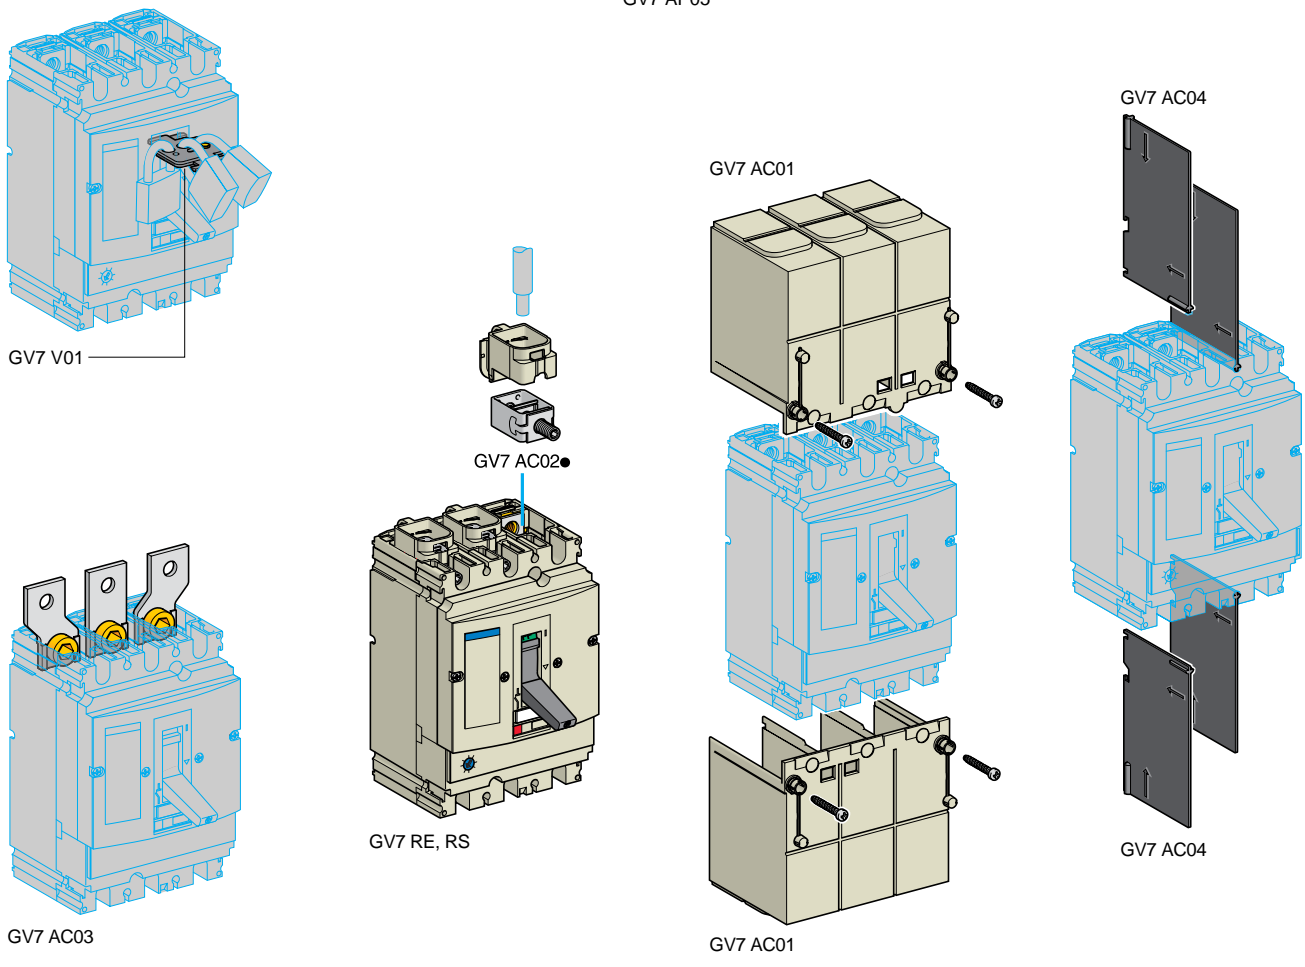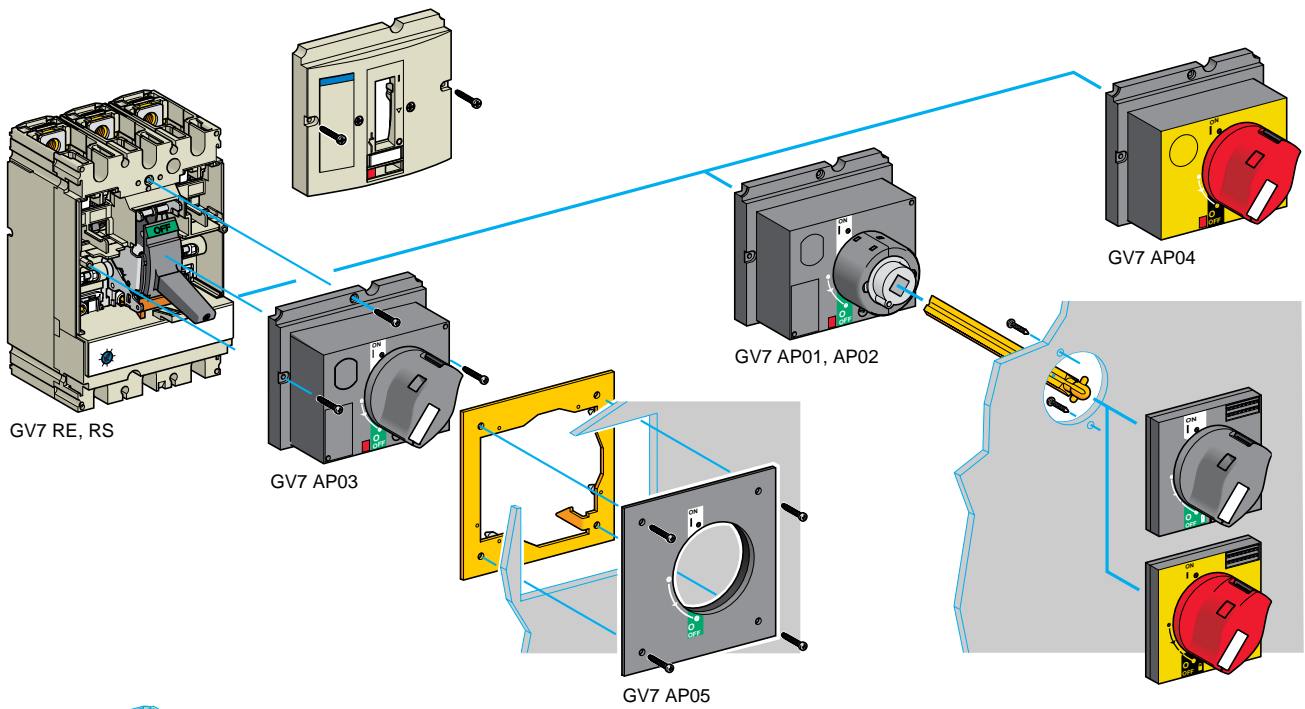


TeSys protection components


Thermal-magnetic motor circuit-breakers

GV7 R with screw clamp connections

Accessories



GV7 AC07



GV7 AC08

Cabling accessories

Description	Application	For use on contactors	Sold in lots of	Unit reference	Weight kg
Clip-on connectors for GV7 R	Up to 150 A, 1.5...95 mm ²	–	3	GV7 AC021	0.300
	Up to 220 A, 1.5...185 mm ²	–	3	GV7 AC022	0.350
Spreader 3-pole (1)	To increase the pitch to 45 mm	–	1	GV7 AC03	0.180
Terminal shields IP 405 (1)	Supplied with sealing accessory	–	1	GV7 AC01	0.125
Phase barriers	Safety accessories used when fitting of shields is impossible	–	2	GV7 AC04	0.075
Insulating screens	Ensure insulation between the connections and the backplate	–	2	GV7 AC05	0.075
Kits for combination with contactor(2)	Allowing link between the circuit-breaker and the contactor. The cover provides protection against direct finger contact	LC1 F115...F185	1	GV7 AC06	0.550
		LC1 F225 and F265	1	GV7 AC07	0.550
		LC1 D115 and D150	1	GV7 AC08	0.550

Direct rotary handle

Replaces the circuit-breaker front cover; secured by screws. It includes a device for locking the circuit-breaker in the O (Off) position by means of up to 3 padlocks with a shank diameter of 5 to 8 mm (padlocks not included). A conversion accessory allows the direct rotary handle to be mounted on the enclosure door. In this case, the door cannot be opened if the circuit-breaker is in the "ON" position. Circuit-breaker closing is inhibited if the enclosure door is open.

Description	Type	Degree of protection	Reference	Weight kg
Direct rotary handle	Black handle, black legend plate	IP 40	GV7 AP03	0.205
	Red handle, yellow legend plate	IP 40	GV7 AP04	0.205
Adapter plate (3)	Four mounting direct rotary handle on enclosure door	IP 43	GV7 AP05	0.100

Extended rotary handle

Allows a circuit-breaker installed in the back of an enclosure to be operated from the front of the enclosure. It comprises:

- a unit which screws onto the front cover of the circuit-breaker,
- an assembly (handle and front plate) to be fitted on the enclosure door,
- an extension shaft which must be adjusted (distance between the mounting surface and the door: 185 mm minimum, 600 mm maximum). It includes a device for locking the circuit-breaker in the O (Off) position by means of up to 3 padlocks with a shank diameter of 5 to 8 mm (padlocks not included). This prevents the enclosure door from being opened.

Description	Type	Degree of protection	Reference	Weight kg
Extended rotary handle	Black handle, black legend plate	IP 55	GV7 AP01	0.775
	Red handle, yellow legend plate	IP 55	GV7 AP02	0.775

Locking device

Allows circuit-breakers not fitted with a rotary handle to be locked in the O (Off) position by means of up to 3 padlocks with a shank diameter of 5 to 8 mm (padlocks not included).

Description	Application	Reference	Weight kg
Locking device	For circuit-breaker not fitted with a rotary handle	GV7 V01	0.100



(1) Terminal shields cannot be used together with spreaders.

(2) The kit comprises links, a protective shield and a depth adjustable metal bracket for the breaker.


(3) This conversion accessory makes it impossible to open the door if the device is closed and prevents the device from being closed if the door is open.

Dimensions


GV2 ME

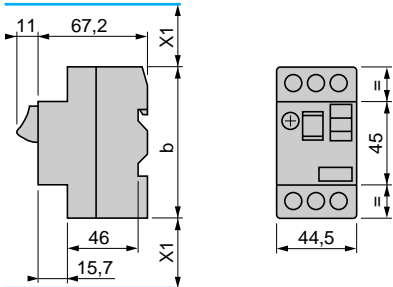


GV AX



GV AD, AM, AN, AU, AS, AX



GV AE





b


GV2 ME●●	89
GV2 ME●●3	101

(1) Maximum
X1 Electrical clearance = 40 mm for $U_e \leq 690$ V

GV2 P

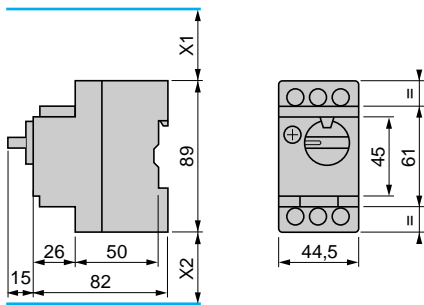

GV2 AK00

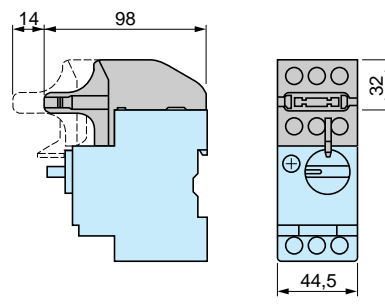

(1) Maximum
X1 Electrical clearance = 40 mm for $U_e \leq 415$ V, or 80 mm for $U_e = 440$ V, or 120 mm for $U_e = 500$ and 690 V
X2 = 40 mm

Mounting





GV2 ME

On 35 mm rail

On panel with adapter plate GV2 AF02

On pre-slotted plate AM1 PA

On rails DZ5 MB201

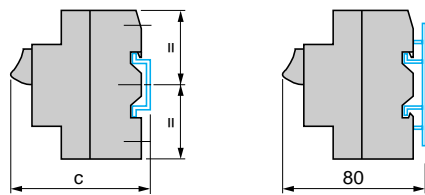

$c = 78.5$ on AM1 DP200 (35 x 7.5)
 $c = 86$ on AM1 DE200, ED200 (35 x 15)






GV2 P

On rail AM1 DE200, ED200 (35 x 15)

Panel mounted

On pre-slotted plate AM1 PA


Adapter plate GK2 AF01



Dimensions


GV2 AF01

Combination GV2 ME + k contactor

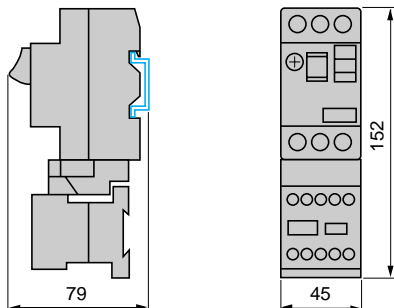


GV2 AF3

Combination GV2 ME + d contactor

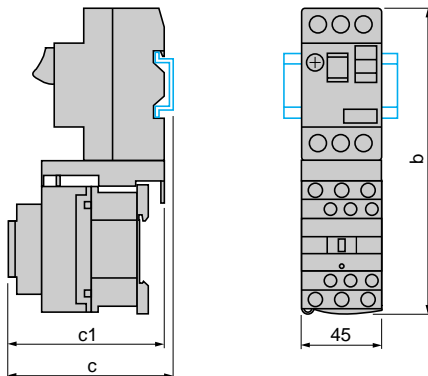

Combination GV2 P + d contactor

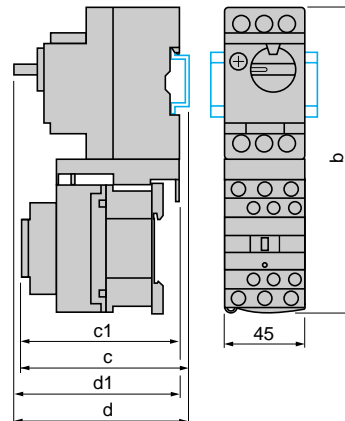


GV2 ME +	LC1 D09...D18	LC1 D25 & D32
b	1764	1868
c1	941	1004
c	996	1059


GV2 P +	LC1 D09...D18	LC1 D25 & D32
b	1764	1868
c1	1001	1064
c	1056	1119
d1	95	95
d	1005	1005

GV2 AF4 + LAD 311


Combination GV2 ME + d contactor

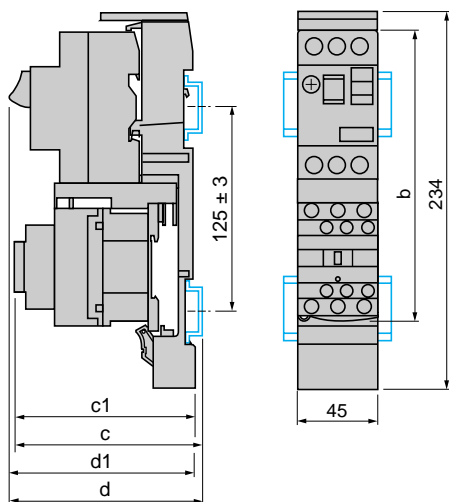

Combination GV2 P + d contactor

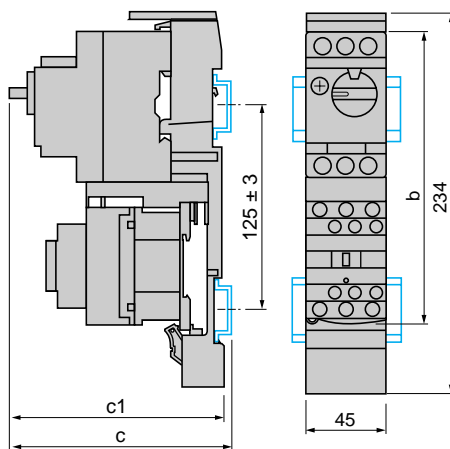

GV2 ME + GV1 L3 (current limiter)

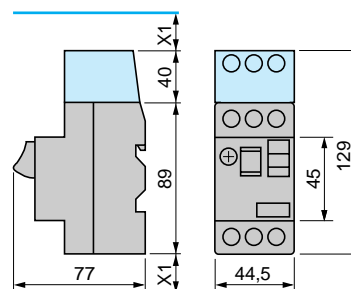

X1 = 10 mm for Ue = 230 V
or 30 mm for 230 V < Ue ≤ 690 V

7.5 mm height compensation plate
GV1 F03




GV2 ME +	LC1 D09...D18	LC1 D25 & D32
b	1764	1868
c1	1031	1364
c	1356	1419
d1	107	107
d	1125	1125


GV2 P +	LC1 D09...D18	LC1 D25 & D32
b	1764	1868
c1	1365	1424
c	1416	1479

Mounting

Mounting of external operator GV2 AP01 or GV2 AP02 for motor circuit-breakers GV2 P

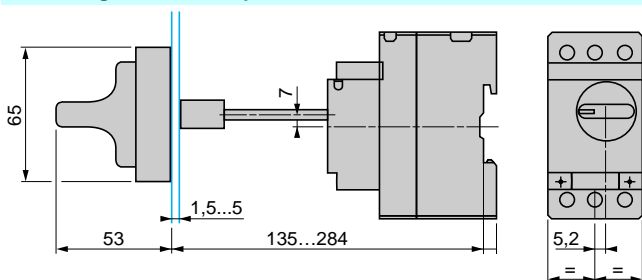


Door cut-out

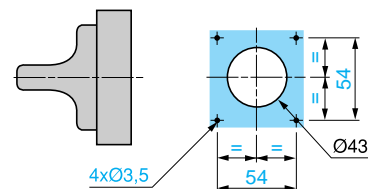

GV2 ME, GV2 P


Sets of busbars GV2 G445, GV2 G454, GV2 G472, with terminal block GV2 G05

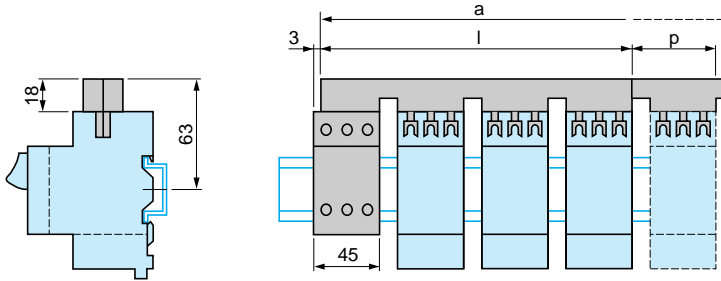


	l	p
GV2 G445 (4 x 45 mm)	179	45
GV2 G454 (4 x 54 mm)	206	54
GV2 G472 (4 x 72 mm)	260	72

	a			
Number of tap-offs	5	6	7	8
GV2 G445	224	269	314	359
GV2 G454	260	314	368	422
GV2 G472	332	404	476	548

Sets of busbars GV2 G●●● with terminal block GV1 G09

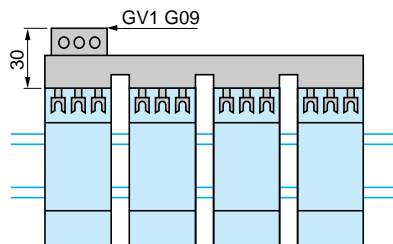


Sets of busbars GV2 G245, GV2 G254, GV2 G272

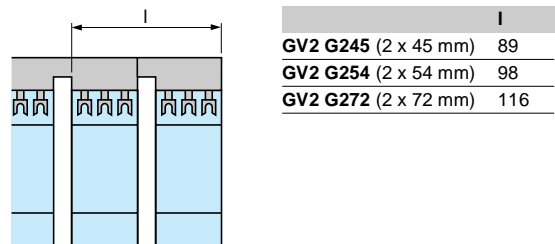


	l
GV2 G245 (2 x 45 mm)	89
GV2 G254 (2 x 54 mm)	98
GV2 G272 (2 x 72 mm)	116

Sets of busbars GV2 G554

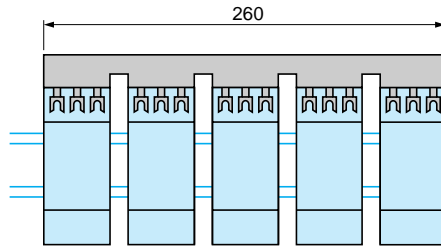

Sets of busbars GV2 G345 and GV2 G354




	l
GV2 G345 (3 x 45 mm)	134
GV2 G354 (3 x 54 mm)	152


Note: To avoid overheating, leave a gap of 10 mm between circuit-breakers when installing.

GV2 RT

Dimensions

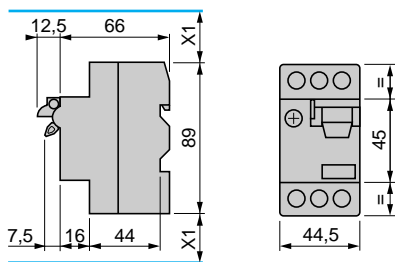

Mounting of external operator GV2 AP03

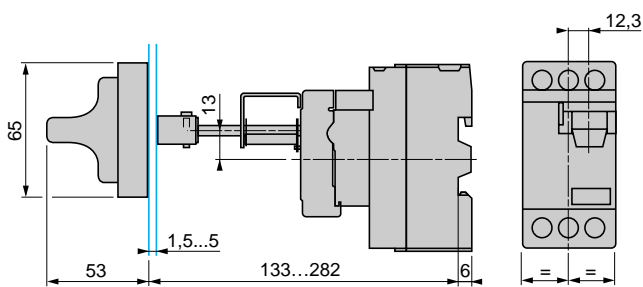

X1: Electrical clearance = 40 mm for Ue < 690 V




Mounting

On 35 mm mounting rail

On panel with adapter plate GV2 AF02

On pre-slotted plate AM1 PA

On rails DZ5 MB

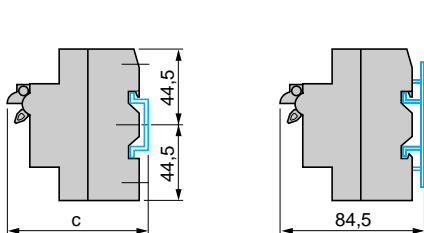


c = 80 on AM1 DP200 (35 x 7.5)
c = 88 on AM1 DE200, ED200 (35 x 15)

GV3 P

Dimensions

Mounting on rail AM1 DE200 or AM1 ED201

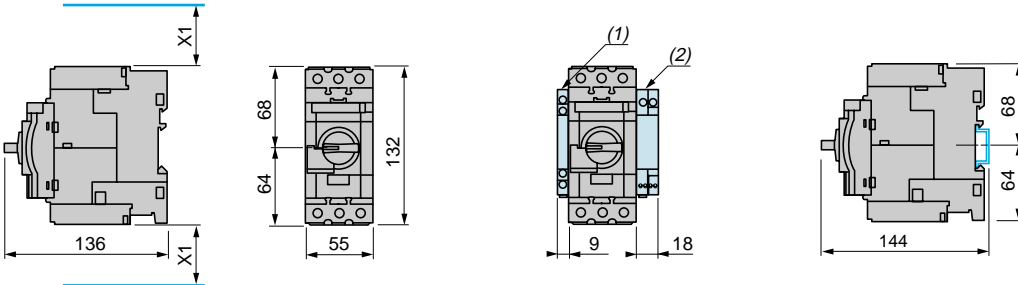


X1 = Electrical clearance (ISC max)
40 mm for $U_e < 500$ V, 50 mm for $U_e < 690$ V

(1) Blocks GV AN●●, GV AD●●, GV AM11
(2) Block GV3 AU●● and GV3 AS●●

Mounting on panel, using M4 screws

Mounting on pre-slotted mounting plate AM1 PA

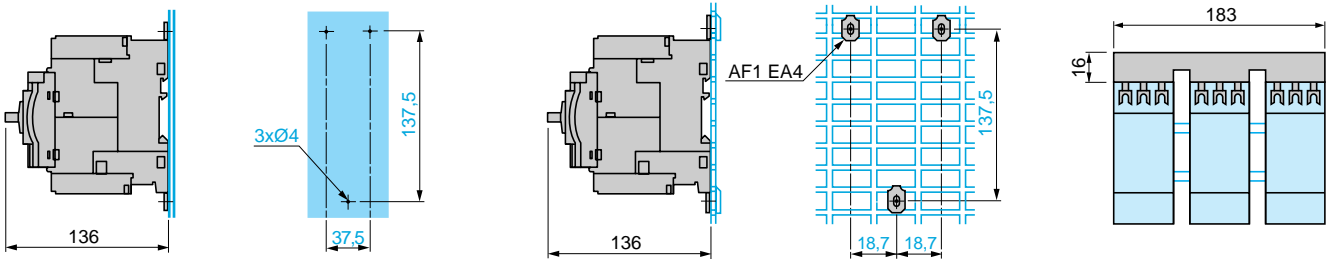


Note: Leave a space of 9 mm between 2 circuit-breakers: either an empty space or side-mounting add-on contact blocks.
Horizontal mounting is possible up to 40 °C.

GV7 R

Dimensions

Motor circuit-breakers with terminal shields or phase barriers GV7 R + GV7 AC01 or AC04

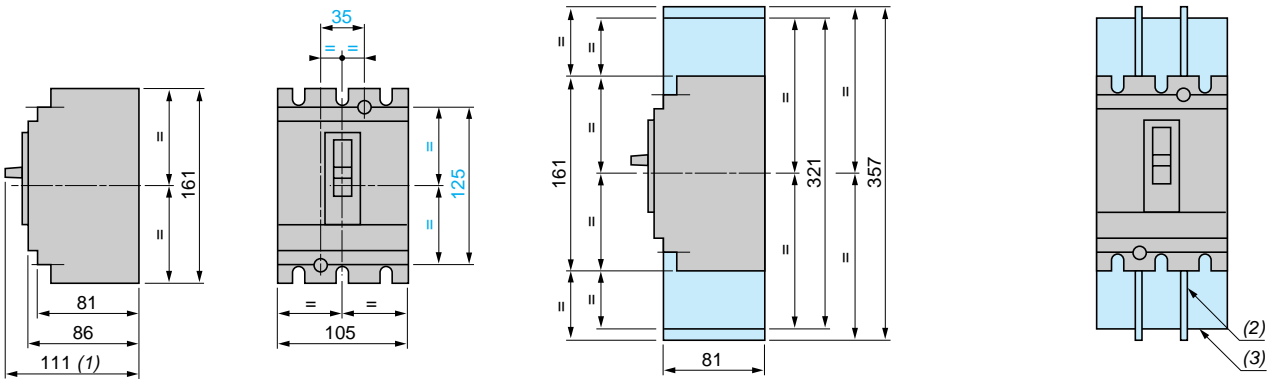


(1) 126 for GV7 R●220

(2) Phase barriers: GV7 AC04

(3) Terminal shields: GV7 AC01


Combination of GV7 R and LC1 F with kit GV7 AC0●

Minimum electrical clearance

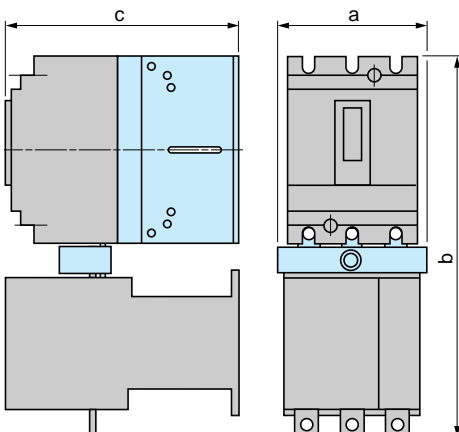

	a	b	c
GV7 R + LC1 F115 or F150 + GV7 AC06	119	334	181
GV7 R + LC1 F185 + GV7 AC06	119	338	188
GV7 R + LC1 F225 + GV7 AC07	131	358	188
GV7 R + LC1 F265 + GV7 AC07	131	364	215

Minimum distance between 2 circuit-breakers mounted side-by-side = 0




	x1	x2
Painted or insulated metal plate, insulation or insulated bar	0	30
Bare metal plate		
U ≤ 440 V	5	35
440 V < U < 600 V	10	35
U ≥ 600 V	20	35

GV7 R

Panel mounting


Mounting on 2 mounting rails DZ5 MB201

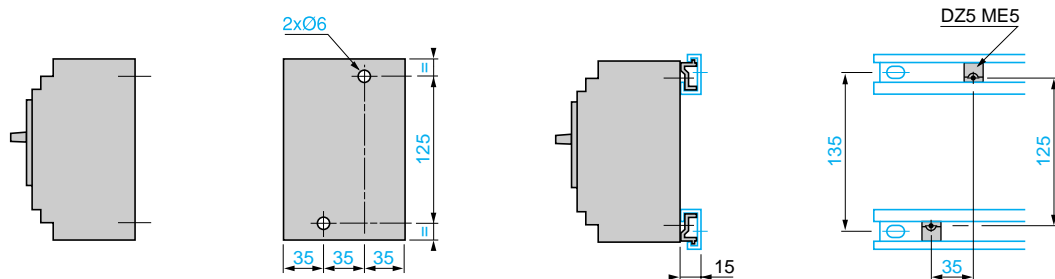


Flush-mounting

1 circuit-breaker GV7 R

n circuit-breakers GV7 R side-by-side

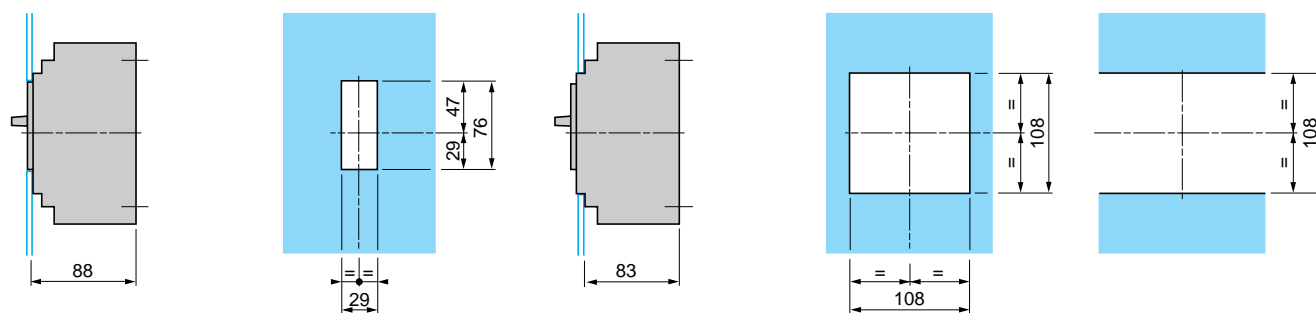


Combination of GV7 R and LC1 F with kit GV7 AC0●

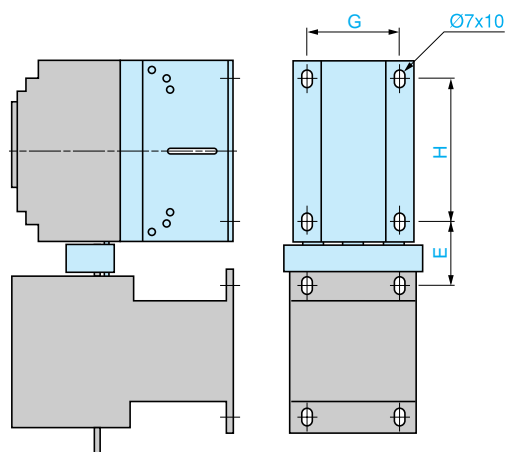


	E	G	H
GV7 R + LC1 F115 + GV7 AC06	44	85	120
GV7 R + LC1 F150 + GV7 AC06	46	85	120
GV7 R + LC1 F185 + GV7 AC06	48	85	120
GV7 R + LC1 F225 + GV7 AC07	57	85	120
GV7 R + LC1 F265 + GV7 AC07	60	85	120


Spreaders GV7 AC03




Connection



Smooth terminals







Connectors



	a
GV7 R●40...R●150	19.5
GV7 R●220	21.5

Direct rotary handle GV7 AP03, GV7 AP04





Flush-mounting



Direct rotary handle GV7 AP03 or GV7 AP04 with conversion accessory GV7 AP05

Front face cut-out



Enclosure viewed from top



Door cut-outs require a minimum distance between the centre of the circuit-breaker and the door hinge point $\Delta \geq 100 + (h \times 5)$.

e = 1 to 3 max

Extended rotary handle GV7 AP01, GV7 AP02

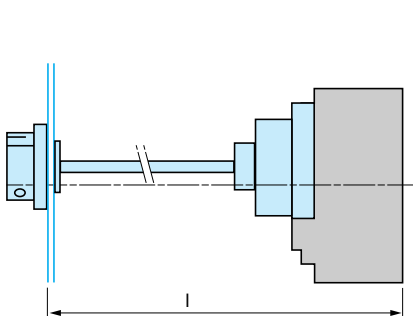


l: 185 min, 600 max


The shaft of the extended rotary handle GV7 AP01 or GV7 AP022 must be cut to length: $l - 126$ mm.

Schemes


GV2 ME●● and GV2 RT



GV2 P●●




GV3 P●●




Front mounting add-on contact blocks Instantaneous auxiliary contacts


GV AE1



GV AE11




GV AE20




Front mounting add-on contact blocks Instantaneous auxiliary contacts and fault signalling contacts

GV AED101




GV AED011




Side mounting add-on contact blocks Instantaneous auxiliary contacts and fault signalling contacts


GV AD0110




GV AD0101



GV AD1010




GV AD1001



Instantaneous auxiliary contacts

GV AN11



GV AN20



Short-circuit signalling contacts

GV AM11




Voltage trips


GV AU●●●



GV AS●●●




GV AX●●●




Current limiter


GV1 L3



Use of fault signalling contact and short-circuit signalling contact

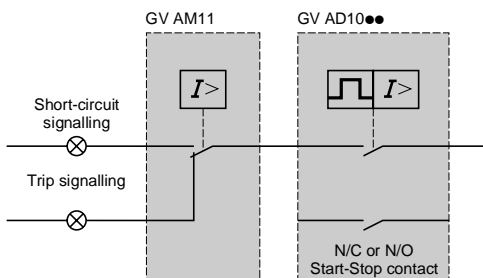


Connection of undervoltage trip for dangerous machines (conforming to INRS) on GV2 ME only

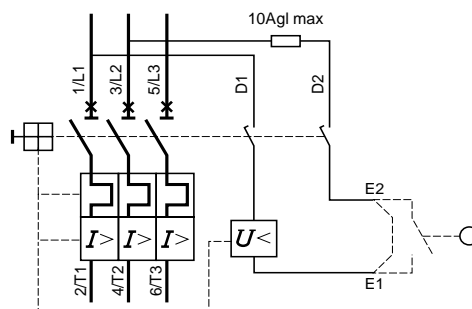

Motor circuit-breakers

GV3 ME



Auxiliary contact block modules

GV3 A01





GV3 A02

GV3 A03

GV3 A05

GV3 A06



GV3 A07



Fault signalling contacts

GV3 A08

GV3 A09



Voltage trips


GV3 B

GV3 D



Motor circuit-breakers

GV7 R



Add-on auxiliary contacts according to their location (1)

GV7 AE11, GV7 AB11

Location 1
C/O contact

Location 2
Trip indication

Location 3
Electrical fault
indication

Location 4
C/O contact




A self-adhesive label, supplied with the contact, can be affixed to the front face of the circuit-breaker to allow personalised marking according to the function of the contact or contacts.
(1) See pages 20 and 59.

Electric trips

GV7 AU●●●


GV7 AS●●●

GV7 AD111, AD112




Recommended application schemes GV7 AD111, AD112

Fault indication

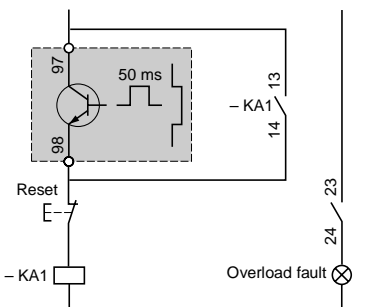

Contactor opening on overload

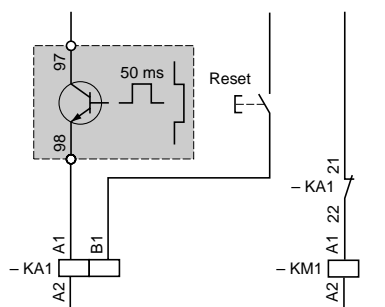


Associated components
KA1: CA2 KN or CAD N


Associated components
KA1: CAD + LAD 6K10 or RHK
KM1: LC1 D or LC1 F

GV2 L


Dimensions

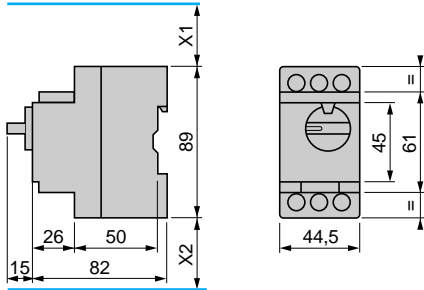

GV AD, AM, AN, AU, AS



GV2 AK00

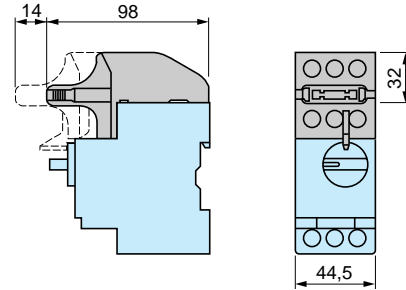

X1 Electrical clearance = 40 mm for $U_e \leq 415$ V, or 80 mm for $U_e = 440$ V, or 120 mm for $U_e = 500$ and 690 V.
X2 = 40 mm.

(1) Maximum





Mounting

On rail AM1 DE200, AM1 ED200 (35 x 15)

Panel mounted

On pre-slotted mounting plate AM1 PA

Adapter plate GK2 AF01

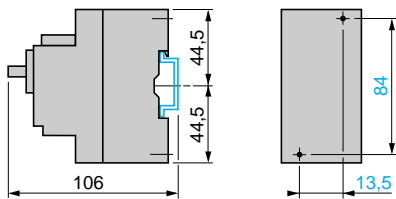


7.5 mm height compensation plate GV1 F03




GV2 LE


Dimensions

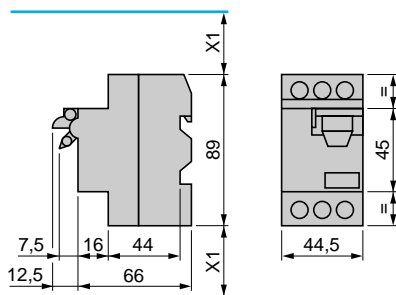

GV AD, AM, AN, AU, AS



GV AE

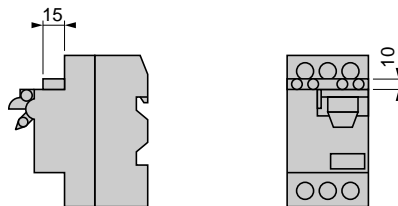

X1 Electrical clearance = 40 mm for $U_e \leq 690$ V.

(1) Maximum





Mounting

On 35 mm rail

On panel with adapter plate GV2 AF02


On pre-slotted plate AM1 PA

On rails DZ5 MB201

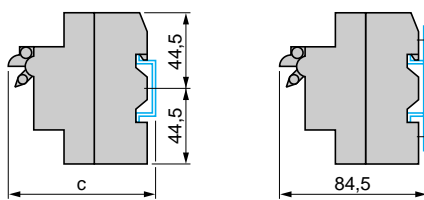


c = 80 on AM1 DP200 (35 x 7.5) and 88 on AM1 DE200, ED200 (35 x 15)


Mounting of external operator GV2 AP01 or GV2 AP02 for GV2 L

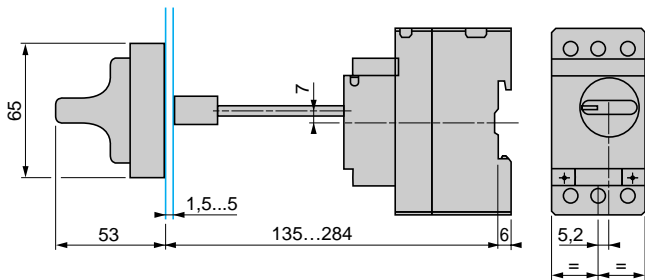


Mounting of external operator GV2 AP03 for GV2 LE

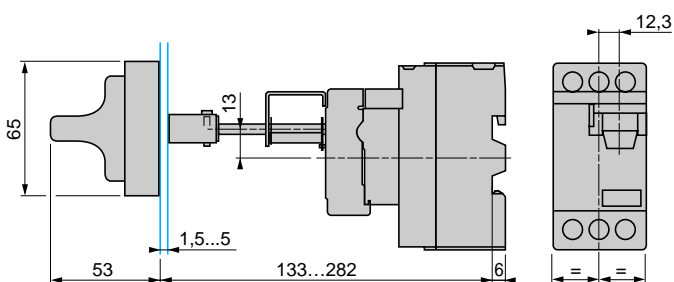

Door cut-out

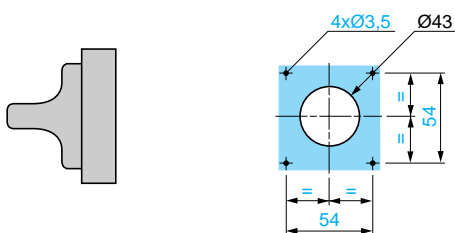

Sets of busbars GV2 G445, GV2 G454, GV2 G472, with terminal block GV2 G05

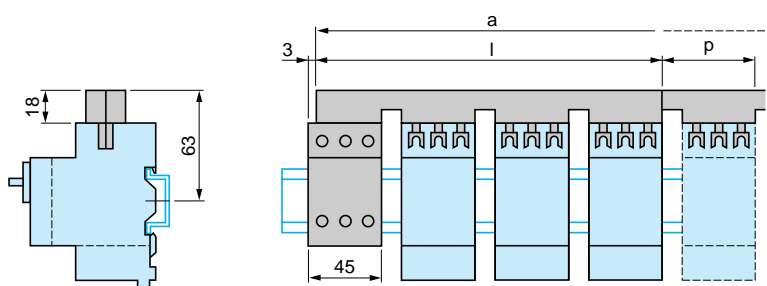



	l	p
GV2 G445 (4 x 45 mm)	179	45
GV2 G454 (4 x 54 mm)	206	54
GV2 G472 (4 x 72 mm)	260	72

	a			
Number of tap-offs	5	6	7	8
GV2 G445	224	269	314	359
GV2 G454	260	314	368	422
GV2 G472	332	404	476	548

Sets of busbars for GV2

Sets of busbars GV2 G●●● with term. block GV1 G09



Sets of busbars GV2 G245, GV2 G254, GV2 GR272

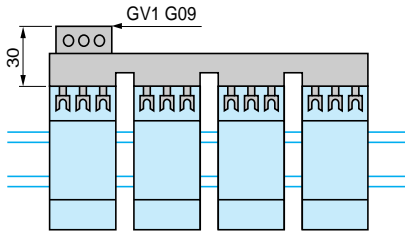

	l
GV2 G245 (2 x 45 mm)	89
GV2 G254 (2 x 54 mm)	98
GV2 G272 (2 x 72 mm)	116

Set of busbars GV2 G554

Sets of busbars GV2 G345 and GV2 G354



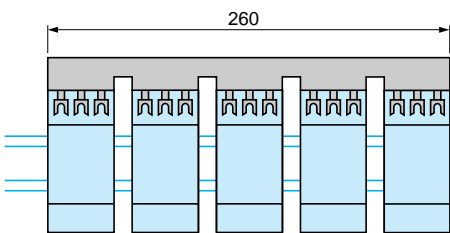


	l
GV2 G345 (3 x 45 mm)	134
GV2 G354 (3 x 54 mm)	152

GV3 L

Dimensions

Mounting on rail AM1 DE200 or AM1 ED201

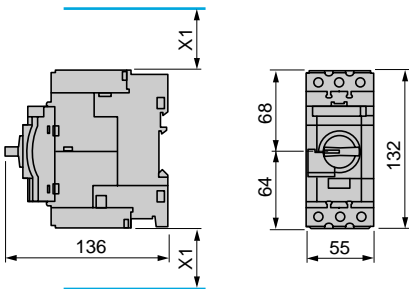




X1 = Electrical clearance (ISC max)
40 mm for Ue < 500 V, 50 mm for Ue < 690 V

(1) Blocks GV AN●●, GV AD●● and GV AM11
(2) Blocks GV3 AU●● and GV3 AS●●

Panel mounting, using M4 screws

Mounting on pre-slotted plate AM1 PA

Set of busbars
GV3 G364

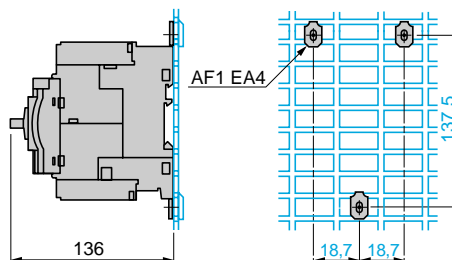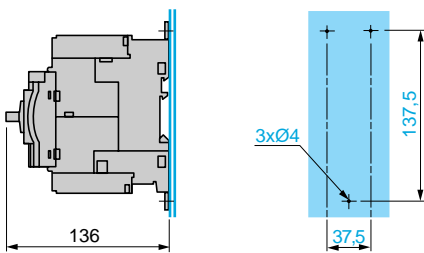


Note: Leave a space of 9 mm between 2 circuit-breakers: either an empty space or side-mounting add-on contact blocks. Horizontal mounting is possible up to 40 °C.

Set of busbars GV2 G554

Set of busbars GV2 G345 and GV2 G354


GK3 EF80 + 4 GK2 AX




	Number of GK2 AX				
	0	1	2	3	4
a	66	74.8	83.5	92.5	101

Magnetic motor circuit-breakers


GV2 L●●



GV2 LE●●



GV3 L●●




Accessories


Front mounting add-on contact blocks

Instantaneous auxiliary contacts


GV AE1




GV AE11



GV AE20




GV AED101 and GV AED011




Side mounting add-on contact blocks

Instantaneous auxiliary contacts and fault signalling contacts


GV AD0110




GV AD0101



GV AD1010




GV AD1001




Instantaneous auxiliary contacts

GV AN11




GV AN20




Short-circuit signalling contacts

GV AM11



Voltage trips

GV AU●●●



GV AS●●●




Start-Stop signalling contact blocks


GK2 AX10



GK2 AX20



GK2 AX50




Fault signalling contact blocks


GK2 AX12



GK2 AX22



GK2 AX52



TeSys enclosed starters

Enclosed thermal-magnetic motor circuit-breakers
GV2 ME and accessories, for customer assembly

References

Thermal-magnetic motor circuit-breakers GV2 ME

For motor circuit-breakers and accessories: see pages 47, 55 and 63.

Starters consisting of a GV2 ME motor circuit-breaker in an enclosure conform to standard IEC 60947-4-1.

GV2	ME 01	ME 02	ME 03	ME 04	ME 05	ME 06	ME 07	ME 08	ME 10	ME 14	ME 16	ME 20	ME 21	ME 22
lthe in enclosure (A)	0.16	0.25	0.4	0.63	1	1.6	2.5	4	6.3	9	13	17	21	23

Enclosures for thermal-magnetic circuit-breakers GV2 ME

Type	Degree of protection	Possible no. of side mounting auxiliary contact blocks on GV2 ME		Reference	Weight kg
		LH side	RH side		
Surface mounting, double insulated with protective conductor. Sealable cover	IP 41	1	1	GV2 MC01	0.290
	IP 55	1	1	GV2 MC02	0.300
				or GV2 MCK04 (1)	0.420
IP 55 for temperature < + 5 °C	1	1	GV2 MC03	0.300	
Flush mounting, with protective conductor	IP 41 (front face)	1	1	GV2 MP01	0.115
	IP 41 (reduced flush mounting)	–	1	GV2 MP03	0.115
	IP 55 (front face)	1	1	GV2 MP02	0.130
	IP 55 (reduced flush mounting)	–	1	GV2 MP04	0.130

Front plate

Description		Reference	Weight kg
For direct control, through a panel, of a chassis mounted GV2 ME	IP 55	GV2 CP21	0.800


Accessories common to all enclosures (to be ordered separately)

Description		Sold in lots of	Unit reference	Weight kg	
Padlocking device (2) for GV2 ME operator (padlocking is only possible in the "O" position)	1 to 3 padlocks Ø 4 to 8 mm	1	GV2 V01	0.075	
Mushroom head	Spring return (2)	1	GV2 K011	0.052	
Emergency stop pushbutton Ø 40 mm, red	Latching (2) IP 55	Key release, key n° 455	1	GV2 K021	0.160
		Turn to release	1	GV2 K031	0.115
			1	GV2 K04 (3)	0.120
Sealing kit	For enclosures and front plate	IP 55	10	GV2 E01	0.012
		IP 55 for $\theta < + 5$ °C	10	GV2 E02	0.012
Neutral terminal		100	AB1 VV635UBL	0.015	
Partition		50	AB1 AC6BL	0.003	


(1) Enclosure GV2 MCK04 is fitted with a GV2 K04 mushroom head Emergency stop pushbutton as standard.

(2) Supplied with IP 55 sealing kit. To be fitted with enclosure GV2 M001.


(3) Padlockable in "O" position using Ø 4 to 8 mm shank padlocks.




GV2 MC



GV2 MP



GV2 CP21




GV2 K011

TeSys enclosed starters

Enclosed thermal-magnetic motor circuit-breakers
GV3 P (for customer assembly)

5103686



GV3 PC02

References (continued)

Thermal-magnetic motor circuit-breakers GV3 P

For motor circuit-breakers and accessories: see pages 48 and 57.

GV3 P40: operational current in enclosure limited to 30 A.

Starters consisting of a GV3 P motor circuit-breaker in an enclosure conform to standards IEC/EN 60947-4-1 and IEC/EN 60947-2.


Metal enclosures fitted with a padlockable rotary handle (1), for thermal-magnetic circuit-breakers GV3 P, up to 30 A

Composition (2)	Type	Degree of protection of enclosure	Reference	Weight kg
<ul style="list-style-type: none"> ■ Metal enclosure, ■ Black handle GV2 AP01 ■ Padlocking in ON/OFF position ■ Circuit-breaker/handle adapter 	Surface mounting	IP 65 IK 09	GV3 PC01	2.000
<ul style="list-style-type: none"> ■ Metal enclosure, ■ Red handle GV2 AP02 ■ Padlocking in OFF position ■ Circuit-breaker/handle adapter 	Surface mounting	IP 65 IK 09	GV3 PC02	2.000

(1) For special applications a **GV3 L** magnetic motor circuit-breaker can be fitted in this type of enclosure. Please consult your Regional Sales Office.

(2) Components for customer assembly. Circuit-breaker to be ordered separately.

Dimensions

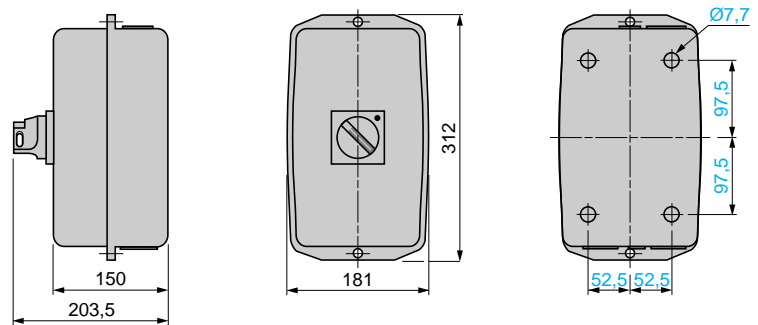

TeSys enclosed starters

Enclosed thermal-magnetic motor circuit-breakers

GV2 ME and accessories

Assembly of a safety enclosure

Thermal-magnetic motor circuit-breakers GV2 ME

For motor circuit-breakers and accessories: see pages 47, 54 and 55. Starters consisting of a GV2 ME motor circuit-breaker in an enclosure conform to standard IEC 60947-4-1.

GV2	ME 01	ME 02	ME 03	ME 04	ME 05	ME 06	ME 07	ME 08	ME 10	ME 14	ME 16	ME 20	ME 21	ME 22
lthe in enclosure (A)	0.16	0.25	0.4	0.63	1	1.6	2.5	4	6.3	9	13	17	21	23

Enclosures for thermal-magnetic circuit-breakers GV2 ME

Type	Degree of protection	Possible number of side-mounting auxiliary contact blocks on GV2 ME		Reference	Weight kg
		LH side	RH side		
Surface mounting, double insulated with protective conductor. Sealable cover	IP 41	1	1	GV2 MC01	0.290
	IP 55	1	1	GV2 MC02	0.300
				or GV2 MCK04 (1)	0.420
	IP 55 for temperature < + 5 °C	1	1	GV2 MC03	0.300


Accessories common to all enclosures (to be ordered separately)

Description		Sold in lots of	Unit reference	Weight kg	
Padlocking devices (2) for GV2 ME operator (padlocking is only possible in the "O" position)	1 to 3 padlocks Ø 4 to 8 mm	1	GV2 V01	0.075	
Mushroom head	Spring return (2)	1	GV2 K011	0.052	
Emergency stop pushbutton Ø 40 mm, red	Latching (2) IP 55	Key release, key n° 455	1	GV2 K021	0.160
		Turn to release	1	GV2 K031	0.115
			1	GV2 K04 (3)	0.120
Sealing kit	For enclosures and front plate	IP 55 for temperature between + 5 °C and + 40 °C	10	GV2 E01	0.012
		IP 55 for temperature between - 20 °C and + 40 °C	10	GV2 E02	0.012
Neutral terminal			100	AB1 VV635UBL	0.015
Partition			50	AB1 AC6BL	0.003


(1) Enclosure GV2 MCK04 is fitted with a GV2 K04 mushroom head Emergency stop pushbutton as standard.

(2) Supplied with IP 55 sealing kit. To be fitted with enclosure GV2 M001.

(3) Padlockable in "Off" position using Ø 4 to 8 mm shank padlocks.



GV2 MC



GV2 K011

TeSys enclosed starters

Enclosed thermal-magnetic motor circuit-breakers

GV2 ME and accessories

Assembly of a safety enclosure


Assembly of a safety enclosure*(conforming to standards IEC 60974-4-1, IEC 60204 and IEC 60292)*

Type of product	Page	Reference
Enclosure	Opposite	GV2 MC●●
Circuit-breaker	46	GV2 ME●●
Undervoltage trip or INRS trip (1)	55	GV2 A●●●● or GV2 AX●●●
Latching mushroom head Stop pushbutton	Opposite	GV2 K021 or GV2 K031 or GV2 K04

(1) Safety device for dangerous machines conforming to INRS and VDE 0113.


Dimensions

Surface mounting enclosure GV2 MC0●

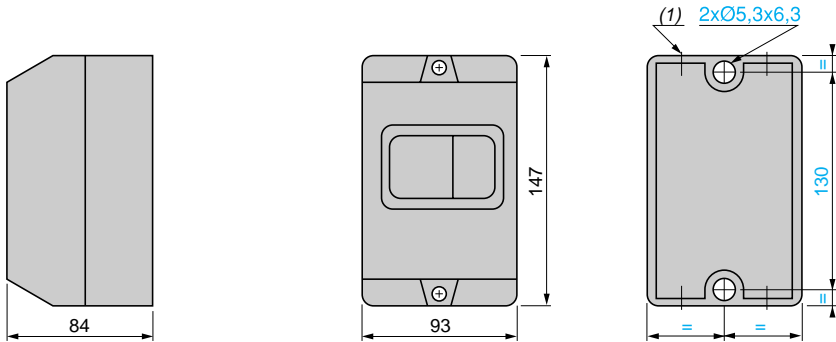

(1) 4 knock-outs for 16 mm plastic cable gland or 16 mm conduit.

Surface mounting enclosure GV2 MCK04

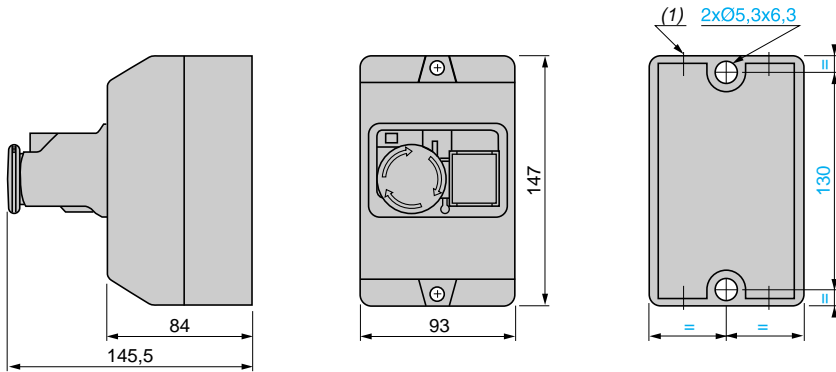

(1) 4 knock-outs for 16 mm plastic cable gland or 16 mm conduit.

Mounting


Flush mounting enclosures GV2 MP0● (panel cut-out)

GV2 MP0●

GV2 MP01, MP02

GV2 MP03, MP04


Front plate GV2 CP21

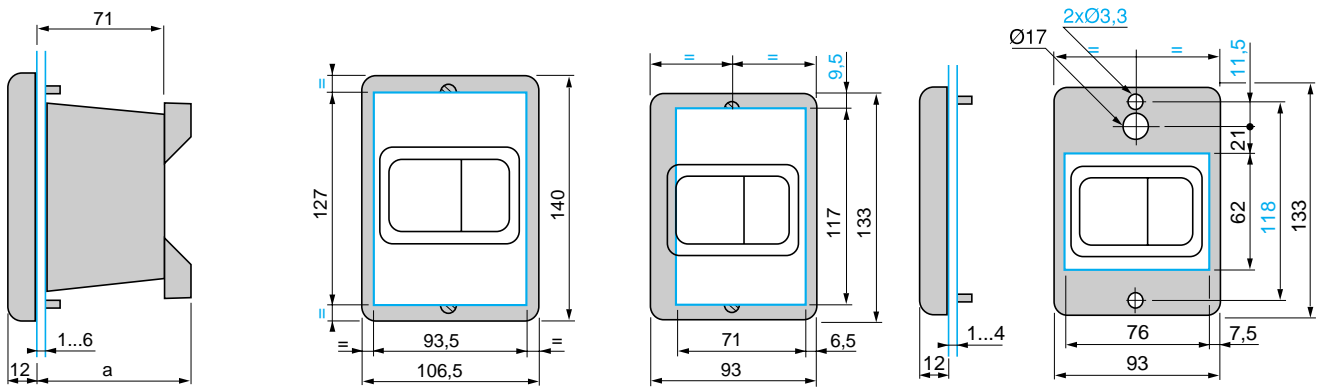

GV2	a
MP01, MP02	-
MP03, MP04	86


Schemes

GV2 ME



Instantaneous auxiliary contacts


GV AE1



GV AE11




GV AE20




Instantaneous auxiliary contacts and fault signalling contacts


GV AD0110




GV AD0101



GV AD1010




GV AD1001




Instantaneous auxiliary contacts

GV AN11




GV AN20



Short-circuit signalling contacts

GV AM11




Voltage trips


GV AU




GV AS



GV AX



Wiring diagram for undervoltage trip used on potentially dangerous machines, conforming to INRS

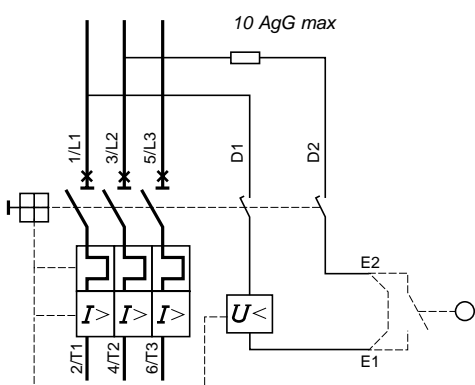

TeSys enclosed starters

D.O.L. starters with manual control,
with magnetic circuit-breaker, 0.55 to 30 kW

Characteristics (1)

Conforming to standards	IEC 60947-4, IEC 60439-1, VDE 0660-102 and EN 60947
Degree of protection conforming to IEC 60529	GV2 LC: IP 547 GV NGC: IP 407
Operational voltage Ue	GV2 LC: 690 V GV NGC: 500 V
Material	Polycarbonate (2)

References

Control by black rotary handle, padlockable in Off position (up to 3 padlocks with Ø 8 shank, to be ordered separately)

Rating In	Breaking capacity Icu conforming to IEC 60947-2				Magnetic tripping current I _d ± 20 %	Reference	Weight
	220/ 230 V	400/ 415 V	440 V	500 V			
A	kA	kA	kA	kA	A		kg
1.6	100	100	100	100	13 In	GV2 LC0206 (3)	0.780
2.5	100	100	100	100	13 In	GV2 LC0207 (3)	0.780
4	100	100	100	100	13 In	GV2 LC0208 (3)	0.780
6.3	100	100	100	100	13 In	GV2 LC0210 (3)	0.780
10	100	100	20	10	13 In	GV2 LC0214 (3)	0.780
14	100	50	20	10	13 In	GV2 LC0216 (3)	0.780
18	100	50	20	10	13 In	GV2 LC0220 (3)	0.780
25	100	50	30	15	12 In	GV NGC0225	2.450
32	100	50	30	15	12 In	GV NGC0232	2.450
40	100	50	30	15	12 In	GV NGC0240	2.450
50	100	50	30	15	12 In	GV NGC0250	2.450
63	100	50	30	15	12 In	GV NGC0263	2.450

533740



GV2 LC02

533741



GV2 LC02

533742



GV NGC02

Variants

Starters with control by red rotary handle on yellow background

Add the letter R to the references selected above.
Example: **GV2 LC0206** becomes **GV2 LC0206R**.

Enclosure without circuit-breaker, with rotary handle mounted on cover

Description	Rating	Reference	Weight
	A		
Black rotary handle	1.6...18	GV2 LC02	0.300
	25...63	GV NGC02	0.550
Red rotary handle on yellow background	1.6...18	GV2 LC02R	0.300
	25...63	GV NGC02R	0.550

533743



GV2 LC02

(1) Circuit-breaker characteristics:

GV2 L: see pages 14 and 15.

NG 125L: product marketed under the Merlin Gerin, brand, please consult your Regional Sales Office.


(2) Avoid placing this material in contact with harsh substances (detergents, chlorine solvents, ketones, alcohol, aromatic hydrocarbons).

(3) The following can be fitted by the customer: a **GVAD** or **GVAM** auxiliary contact block on the LH side and a **GVA** trip on the RH side.

Dimensions

GV2 LC0206...LC0220


GV NGC0225...NGC0263

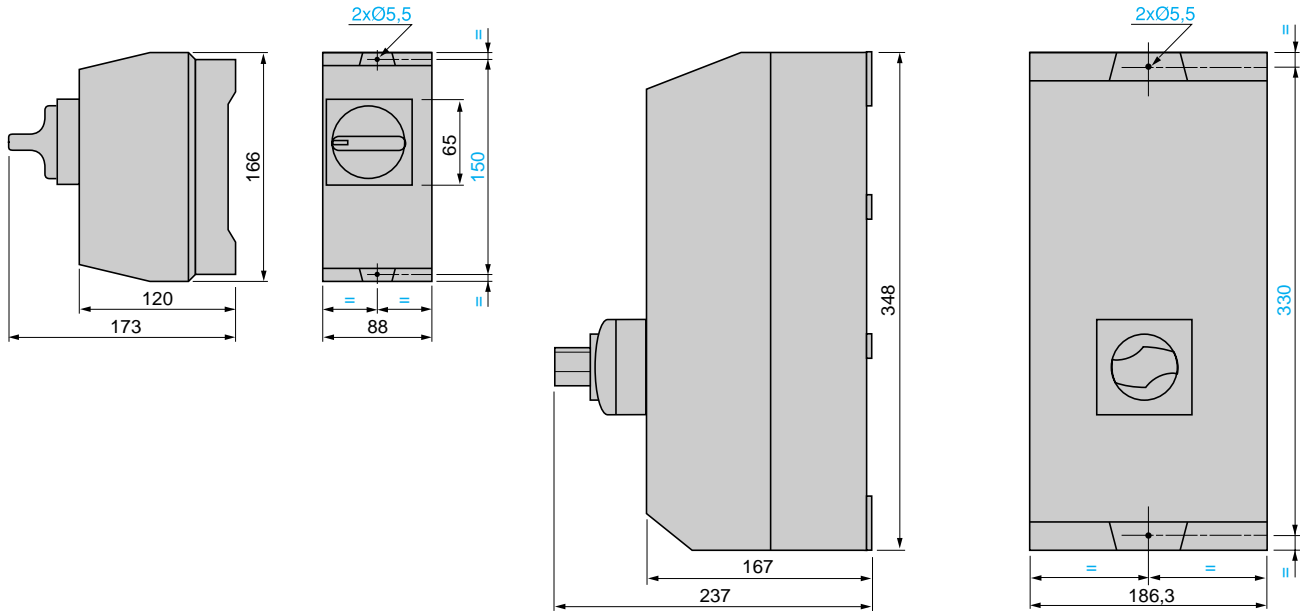

Knock-outs or blanking plugs for cable glands

Enclosure type	At top	At bottom
	ISO	ISO
GV2 LC	2 x 20 or 2 x 25	2 x 20 or 2 x 25
GV NGC	2 x 20 or 2 x 25 or 2 x 32 or 2 x 40	2 x 20 or 2 x 25 or 2 x 32 or 2 x 40

Scheme



Old circuit-breaker		New circuit-breaker		
Reference	Icu / 400 V	Reference	Ir	Icu / 400 V
Thermal-magnetic motor circuit-breakers GV3 ME				
GV3 ME06	100 kA	GV2 P06	1...1.6 A	> 100 kA
GV3 ME07	100 kA	GV2 P07	1.6...2.5 A	> 100 kA
GV3 ME08	100 kA	GV2 P08	2.5...4 A	> 100 kA
GV3 ME10	100 kA	GV2 P10	4...6 A	> 100 kA
GV3 ME14	100 kA	GV2 P14	6...10 A	> 100 kA
GV3 ME20	100 kA	GV3 P13 GV3 P18	9...13 A 12...18 A	100 kA 100 kA
GV3 ME25	100 kA	GV3 P25	17...25 A	100 kA
GV3 ME40	35 kA	GV3 P32 GV3 P40	23...32 A 30...40 A	100 kA 50 kA
GV3 ME63	35 kA	GV3 P50 GV3 P65	37...50 A 48...65 A	50 kA 50 kA
Reference	Icu / 400 V	Reference	Ie	Icu / 400 V
Magnetic circuit-breakers GK3 EF				
GK3 EF40	50 kA	GV3 L25 GV3 L32 GV3 L40	25 A 32 A 40 A	100 kA 100 kA 50 kA
GK3 EF65	35 kA	GV3 L50 GV3 L65	50 A 65 A	50 kA 50 kA

Old enclosed circuit-breaker		New enclosed circuit-breaker	
Reference	Type of operator (not included)	Reference	Type of handle included
Enclosed circuit-breakers GV3 ME			
GV3 CE01	GV1K0●	GV3 PC01 GV3 PC02	GV2 AP01 (black) GV2 AP02 (red)

The efficiency of Telemecanique branded *solutions*

Used in combination, Telemecanique products provide quality solutions, meeting all your **Automation & Control** applications requirements.



A worldwide presence

Constantly available

- More than 5 000 points of sale in 130 countries.
- You can be sure to find the range of products that are right for you and which complies fully with the standards in the country where they are used.

Technical assistance wherever you are

- Our technicians are at your disposal to assist you in finding the optimum solution for your particular needs.
- Schneider Electric provides you with all necessary technical assistance, throughout the world.

www.telemecanique.com

Schneider Electric Industries SAS

Head Office
89, bd Franklin Roosevelt
92506 Rueil-Malmaison Cedex
France
www.schneider-electric.com

Due to evolution of standards and equipment, the characteristics indicated in texts and images of this document do not constitute a commitment on our part without confirmation.
Design: Schneider Electric
Photos: Schneider Electric
Printed by:

Simply Smart !

DIA1ED2060503EN